

6-01-00

A

The Law Offices of
STRAUB & POKOTYLO

Michael P. Straub
 mike@sp-ip.com

John C. Pokotylo
 john@sp-ip.com

1 Bethany Road
 Suite 56, Bldg. 4
 Hazlet, NJ 07730

Telephone: 732-335-1222
 Facsimile: 732-335-1228
 Internet Site: www.sp-ip.com

May 31, 2000

UTILITY PATENT APPLICATION TRANSMITTAL LETTER

Assistant Commissioner of Patents
 Box **Patent Application**
 Washington, D.C. 20231

Sir:

Enclosed herewith for filing is the following
utility patent application:

Attorney Docket No.: **OOCL-33(6SY-00S0352)**

Applicants: **Kensuke ISHII et al.**

Title: **"COLOR REPRODUCTION SYSTEM FOR CARRYING OUT COLOR
 CORRECTION BY CHANGING OVER COLOR-CORRECTION
 PARAMETERS ACCORDING TO IMAGES OF PHOTOGRAPHED
 SUBJECTS"**

PATENT APPLICATION FILING FEE CALCULATION

	<u>No. Filed</u>	<u>Less</u>	<u>Rate/Claim</u>	<u>Fee</u>
Total				
Claims	<u>15</u>	-20	0 x \$18.00	\$ 00.00
Independent				
Claims	<u>1</u>	-3	0 x \$78.00	\$ 00.00
			Minimum Filing Fee	\$ 690.00
			Multiple Dependency Fee	
			(if applicable - \$260.00)	\$ 00.00
			50% Reduction for Small Entity	\$ 690.00
			(Independent Inventor, Non-profit	
			Corporation, or Small Business	
			Concern) - appropriate	
			verified statement attached	\$- 00.00
			TOTAL FILING FEE	\$ 690.00
			ASSIGNMENT RECORDATION	\$ 40.00
			TOTAL FEES ENCLOSED	\$ 730.00

☒ Specification: 81 Total Pages (including claims and abstract)

☒ Drawing(s): 30 Total Sheets (FIGs. 1-34)

Also enclosed herewith for filing in connection with the enclosed application are:

☒ Our check in the amount of \$ 730.00 (the total filing fee) is enclosed herewith. If this check is unacceptable, insufficient or omitted, kindly charge the entire or additional filing fee, as appropriate, to the deposit account of **Straub & Pokotylo**, deposit account number **50-1049**. To facilitate that charge, a duplicate copy of this letter is enclosed herewith.

☒ Postcard Receipt;

☐ Preliminary Amendment;

☒ Oath or Declaration:

☒ Newly executed on May 25 and May 26, 2000;

☐ Copy from a prior application (36 C.F.R. § 1.63(d));

☒ Assignment Papers to: Olympus Optical Co., Ltd.;

☐ Information Disclosure Statement, modified PTO-1449, and (1) cited reference(s);

☐ Letter referencing previously filed disclosure document; number _____ filed _____;

☐ Verified Statement Claiming Small Entity Status:

☐ Newly executed on _____;

☐ Copy from a prior application, status still proper and desired;


☐ Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b);

☐ Microfiche Computer Program (Appendix);

- ☐ English translation document;
- ☒ Submission of Priority Document and certified copies of Japanese patent applications or inventor's certificate, filed May 31, 1999 and June 18, 1999 and assigned serial nos. 11-151969 and 11-172772, respectively, upon which claims to priority are made; and
- ☐ Other: _____

Respectfully submitted,

STRAUB & POKOTYLO



John C. Pokotylo, Attorney

Reg. No. 36,242


Customer No. IDON601137

*****EXPRESS MAIL CERTIFICATION*****

"Express Mail" mailing label number: EL547453268US

Date of deposit: May 31, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner of Patents, **Box Patent Application**, Washington, D.C. 20231.



Signature of person making certification

John C. Pokotylo

Name of person making certification

TITLE OF THE INVENTION

COLOR REPRODUCTION SYSTEM FOR CARRYING OUT COLOR
CORRECTION BY CHANGING OVER COLOR-CORRECTION PARAMETERS
ACCORDING TO IMAGES OF PHOTOGRAPHED SUBJECTS

5 CROSS-REFERENCE TO RELATED APPLICATIONS

This application is based upon and claims the
benefit of priority from the prior Japanese Patent
Applications No. 11-151969, filed May 31, 1999; and
No. 11-172772, filed June 18, 1999, the entire contents
10 of which are incorporated herein by reference.

BACKGROUND OF THE INVENTION

The present invention relates to a color
reproduction system having a color image processing
unit for estimating colors of a photographed subject
15 from photographic signals obtained by photographing the
subject by a color photographing unit such as a digital
camera or the like.

As a method of estimating color information on a
photographed subject under a predetermined illumination
20 light from color-image data obtained by photographing
the subject by a color photographing unit such as a
digital camera or the like, there has been proposed a
method of using foresight information on the
photographed subject such as a base function or a
25 correlation matrix of a spectral reflectance of the
subject, as disclosed in Japanese Patent Application
KOKAI Publication No. 11-85952. When a base function

or a correlation matrix of a spectral reflectance of the subject is used, it is possible to estimate colors of the subject in high precision and reproduce the colors even if a photographic illumination light at the
5 time of the photographing is different from an observation illumination light at the time of an observation.

This conventional color reproduction system uses a spectral sensitivity of a color photographing unit, a
10 photographic illumination light spectrum and an observation illumination light spectrum as information for estimating colors. However, these data have conventionally been obtained by measurement using an expensive measuring instrument such as a spectrometer.
15 Therefore, it has not been possible to provide a simple color reproduction system.

On the other hand, in Jpn. Pat. Appln. KOKAI Publication No. 11-96333, there has been disclosed another method of utilizing a photographic signal of an
20 object such as color charts of known spectral reflectances obtained by photographing the object at the same time as the photographing of a subject or under the same photographing conditions. This method is for estimating color information of the photographed
25 subject under a predetermined illumination light by utilizing the object photographic signal, without using the spectral sensitivity of the color photographing

unit or measurement data of the photographic
illumination light spectrum. According to this method,
it is not necessary to measure in advance the spectral
sensitivity of a color-photographing unit. It is not
5 necessary to measure a photographic illumination light
spectrum at the time of photographing, either.
Therefore, this method can simplify the system.

For example, it is possible to arrange as follows.
At a hospital A, a face of a patient is photographed in
10 colors by a digital camera, and at the same time, a
predetermined color chart is photographed. The image
data of these photographs are transferred to a hospital
B. At the hospital B, the face colors of the patient
are converted into face colors of the patient under the
15 observation illumination light at the hospital B, and
the converted face colors are displayed on the monitor.
When this system is employed, an expensive measuring
instrument like a spectrometer is not necessary at the
hospital A where the picture is taken. Thus, it
20 becomes easy to obtain the data for accurate
reproduction of colors.

In the above-described color reproduction system
for converting illumination colors by using the
foresight information of a subject, it is essential
25 that the color photographing unit has independent
spectral sensitivities by at least the number of base
functions of spectral reflectances of the subject in

order to make an accurate estimate of colors of the subject. It is known that spectral reflectances of body skin colors can be displayed in high precision by a linear sum of three base functions. However, in
5 general, in order to display all the spectral reflectances of an object in the natural world, more base functions are considered to be necessary. Therefore, in order to carry out a simple color reproduction in high precision by using a general
10 three-band digital camera having three bands of red (R), green (G), and blue (B), there has been a problem that a subject to be photographed is limited to an object that has spectral reflectances that can be approximated by three base functions.

15 On the other hand, there has been known a color reproduction system for carrying out a color reproduction by selecting a suitable set of an output profile and an input profile for one input image, as shown in FIG. 23. In FIG. 23, an input image from an
20 image input unit 10 is input to a device-independent color converting section 11A of a color correcting section 11. The device-independent color converting section 11A converts colors of the input image into a device-independent color image by referring to an input
25 profile 11A, and outputs the device-independent color image to a device value converting section 11B. The device value converting section 11B converts the

device-independent color image into a device value that matches the characteristics of an output unit by referring to an output profile 111B, and outputs the device value as an output image to an image output unit 12.

Japanese Patent Publication No. 2678007 discloses a color information correcting unit for correcting a plurality of pieces of read information of a plurality of color components into corresponding recording information for a plurality of record open image colors based on color correction parameters, in the reading of color images.

Further, Japanese Patent Publication No. 2681181 discloses a color data correcting unit that includes an operating unit for correcting colors by carrying out a matrix calculation in color data that has been obtained by digitizing an input signal.

The above-described conventional color reproduction method in the color reproduction system is for carrying out a color reproduction by selecting a suitable set of an output profile and an input/output profile for one input image. According to this method, colors are reproduced based on the same subject characteristic data for all the objects within the image. In other words, colors are reproduced based on object spectrum statistical data. Therefore, the conversion precision is lowered when a plurality of

objects are included in the image.

According to the above-described Japanese Patent Publication No. 2678007 and Japanese Patent Publication No. 2681181, although a matrix is selected based on the colors of RGB values, only colors are corrected, and the colors are not converted into colors under the illumination light of the observation side. Further, as subject characteristic data is not used, colors cannot be reproduced in high precision.

10

BRIEF SUMMARY OF THE INVENTION

It is, therefore, an object of the present invention to provide a color reproduction system capable of reproducing colors in high precision.

15

More specifically, it is an object of the present invention to provide a color reproduction system capable of reproducing colors of all the objects included in an image in high precision, by dividing the image into images of a plurality of areas and conducting a suitable color conversion in each divided area.

20

It is another object of the invention to provide a color reproduction system capable of reproducing colors in high precision, by accurately recognizing objects included in a photographed image and conducting color conversion suitable for each object.

25

It is still another object of the invention to provide a color reproduction system capable of

reproducing colors in high precision without having
characteristic information of a photographed subject in
advance, by photographing color charts of known
spectral reflectances and calculating characteristics
5 of the subject from a spectral reflectance of a color
chart of a value nearest a signal value obtained when
the subject has been photographed.

It is still another object of the invention to
provide a color reproduction system capable of
10 reproducing colors in high precision, by estimating
colors of various subjects by using a color-
photographing unit of a limited number of bands.

In order to achieve the above objects, according
to a first aspect of the present invention, there is
15 provided a color reproduction system comprising:

a color image input section; and

a color correcting section for correcting colors
of an image of a subject obtained by photographing the
subject by the color image input section, wherein
20 the color correcting section corrects colors by
changing over a plurality of color correction
parameters according to a subject image signal from the
color image input section.

According to a second aspect of the invention,
25 there is provided a color reproduction system relating
to the first aspect, wherein

the color correcting section comprises:

an object recognizing section for dividing a subject image input from the color image input section into images of a plurality of areas, and selecting a suitable input profile from among a plurality of input profiles for each divided area;

a device-independent color converting section for converting an image of each area into a device-independent color image by using the input profile selected from among the plurality of input profiles;

an image combining section for combining the device-independent color images converted at divided areas into one device-independent color image; and

a device value image converting section for converting the combined device-independent color image into an output device value image by using a predetermined output profile.

According to a third aspect of the invention, there is provided a color reproduction system relating to the first aspect, wherein the color correcting section has a plurality of input/output profiles prepared by integrating input profiles and output profiles together, and comprises:

an object recognizing section for dividing an input subject image into images of a plurality of areas, and selecting a suitable input/output profile from among the plurality of input/output profiles for each divided area;

a device value image converting section for converting an image of each area into a device value image by using the input/output profile selected from among the plurality of input/output profiles; and

5 an image combining section for combining the device value images converted at divided areas into one device value image.

According to a fourth aspect of the invention, there is provided a color reproduction system relating to the first aspect, further comprising:

10 an object recognizing section for dividing a subject image data including information necessary for preparing a plurality of input profiles into images of a plurality of areas, and selecting suitable subject characteristic information from among a plurality of
15 pieces of subject characteristic information for each divided area;

a format converting section for converting a format based on selected subject characteristic
20 information and outputting image data capable of changing illumination by areas;

a device-independent color converting section for calculating an input profile from the illumination-variable image data, selecting a suitable input profile
25 from among the plurality of input profiles based on the calculated input profile, and converting the image in each area into a device-independent color image by

using the selected input profile;

an image combining section for combining the device-independent color images converted at divided areas into one device-independent color image; and

5 a device value image converting section for converting the combined device-independent color image into an output device value image by using a predetermined output profile.

According to a fifth aspect of the invention,
10 there is provided a color reproduction system relating to the first aspect, further comprising:

an area dividing section for dividing an input image into images of a plurality of areas;

a device-independent color converting section for
15 converting the image in each divided area into a device-independent color image by using the plurality of input profiles in parallel;

a conversion result selecting section for selecting a device-independent color image for each
20 area by comparing the plurality of converted device-independent color images;

an image combining section for converting the device-independent color images selected at divided areas into one device-independent color image; and

25 a device value image converting section for converting the combined device-independent color image into an output device value image by using a

predetermined output profile.

According to a sixth aspect of the invention, there is provided a color reproduction system relating to the first aspect, further comprising:

5 an area dividing section for dividing an input image into images of a plurality of areas;

 a first device-independent color converting section for converting the image in each divided area into a device-independent color image by using one
10 input profile;

 a second device-independent color converting section for converting the input image in each divided area into a device-independent color image by using an input profile selected from among a plurality of input
15 profiles for each area based on a result of the conversion in the first device-independent color converting section;

 an image combining section for converting the device-independent color images converted at divided
20 areas into one device-independent color image; and

 a device value image converting section for converting the combined device-independent color image into an output device value image by using a predetermined output profile.

25 According to a seventh aspect of the invention, there is provided a color reproduction system relating to the first aspect, further comprising:

an area dividing section for dividing an input image into images of a plurality of areas;

5 a first device-independent color converting section for converting the image in each divided area into a device-independent color image by using one input profile;

a spectral reflectance database for storing information on spectral reflectances of a plurality of objects;

10 a conversion result judging section for judging a result of the conversion at the first device-independent color converting section by referring to the spectral reflectance database;

15 a subject characteristic information calculating section for calculating subject characteristic information by selecting information in the spectral reflectance database based on a result of the decision by the conversion result judging section;

20 a second device-independent color converting section for converting the input image in each divided area into a device-independent color image by using an input profile selected from among a plurality of input profiles prepared based on the subject characteristic information calculated by the subject characteristic information calculating section;

25

an image combining section for converting the device-independent color images converted at divided

areas into one device-independent color image; and
a device value image converting section for
converting the combined device-independent color image
into an output device value image by using a
5 predetermined output profile.

According to an eighth aspect of the invention,
there is provided a color reproduction system relating
to the first aspect, further comprising:

an object recognizing section for selecting an
10 input profile to be used from among a plurality of
input profiles based on a signal value of an image
obtained by photographing using a plurality of color
charts of known spectral reflectances;

a device-independent color converting section for
15 converting an image of each area into a device-
independent color image by using the input profile
selected from among the plurality of input profiles;

an image combining section for combining the
device-independent color images converted at divided
20 areas into one device-independent color image; and

a device value image converting section for
converting the combined device-independent color image
into an output device value image by using a
predetermined output profile.

25 According to a ninth aspect of the invention,
there is provided a color reproduction system relating
to the first aspect, further comprising:

a spectral reflectance database having spectral reflectances of color charts;

5 a subject characteristic calculating section for calculating subject characteristic information from a color-chart photographic image based on signal values of an image obtained by photographing using a plurality of color charts of known spectral reflectances and data of the spectral reflectance database;

10 an object recognizing section for dividing a subject photographic image into images of a plurality of areas, and selecting an input profile to be used from among a plurality of input profiles based on the calculated subject characteristic information;

15 a device-independent color converting section for converting an image of each area into a device-independent color image by using the input profile selected from among the plurality of input profiles;

20 an image combining section for combining the device-independent color images converted at divided areas into one device-independent color image; and

a device value image converting section for converting the combined device-independent color image into an output device value image by using a predetermined output profile.

25 According to a tenth aspect of the invention, there is provided a color reproduction system relating to the second aspect, wherein

the input profile is prepared based on at least one of image input unit information that includes photographic characteristics of an image input unit used for the photographing and information on a set
5 state of the color image input section, observation illumination light information, and subject characteristic information that represents statistical characteristics of spectral reflectances of the photographed subject.

10 According to an eleventh aspect of the invention, there is provided a color reproduction system relating to the first aspect, wherein

the color correcting section comprises a color
estimating section for estimating tristimulus values of
15 the subject under an observation illumination light, based on subject photographic signals obtained by photographing the subject by the color image input section, spectral sensitivity of the color image input section, color matching functions, a spectrum of
20 photographic illumination light, a spectrum of observation illumination light and statistical data of spectral reflectances of the subject, and

the color estimating section uses the statistical
data which is changed over according to the subject
25 photographic signals.

According to a twelfth aspect of the invention, there is provided a color reproduction system relating

to the first aspect, wherein

the color correcting section comprises a color
estimating section for estimating tristimulus values of
the subject under an observation illumination light,
5 based on object photographic signals obtained by
photographing a plurality of objects of known spectral
reflectances by the color image input section, subject
photographic signals obtained by photographing the
subject by the color image input section, color
10 matching functions, a spectrum of observation
illumination light and statistical data of spectral
reflectances of the subject, and

the color estimating section uses the statistical
data which is changed over according to the subject
15 photographic signals.

According to a 13th aspect of the invention, there
is provided a color reproduction system relating to
the eleventh aspect, wherein the color estimating
section uses the statistical data which is changed over
20 based on a relationship between spectral reflectance
data for calculating statistics of spectral
reflectances and the subject photographic signals.

According to a 14th aspect of the invention, there
is provided a color reproduction system relating to the
25 twelfth aspect, wherein the color estimating section
uses the statistical data which is changed over based
on a relationship between spectral reflectance data for

calculating statistics of spectral reflectances and the subject photographic signals.

According to a 15th aspect of the invention, there is provided a color reproduction system relating to the twelfth aspect, wherein the color estimating section changes over the statistical data based on a relationship between spectral reflectance data for calculating statistics of spectral reflectances of the subject obtained from a relationship between the object photographic signals and spectral reflectances of the objects, and the subject photographic signals.

Additional objects and advantages of the invention will be set forth in the description which follows, and in part will be obvious from the description, or may be learned by practice of the invention. The objects and advantages of the invention may be realized and obtained by means of the instrumentalities and combinations particularly pointed out hereinafter.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWING

The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate presently preferred embodiments of the invention, and together with the general description given above and the detailed description of the preferred embodiments given below, serve to explain the principles of the invention.

FIG. 1 is a diagram showing a structure of a color reproduction system relating to a first embodiment of the present invention.

FIG. 2 is a diagram showing a detailed structure
5 of the device-independent color converting section 202.

FIG. 3 is a diagram showing a detailed structure of a device value converting section 204.

FIG. 4 is a diagram showing a structure of a
modification of the first embodiment.

10 FIG. 5 is a diagram showing a distribution of a spectral reflectance space of subjects in a multi-dimensional space of a spectrum.

FIG. 6 is a diagram showing a structure of a color reproduction system relating to a second embodiment of
15 the present invention.

FIG. 7 is a diagram showing a detailed structure of a device value converting section 222.

FIG. 8 is a diagram showing a structure of a
modification of the second embodiment.

20 FIG. 9 is a diagram showing a structure of a color reproduction system relating to a third embodiment of the present invention.

FIG. 10 is a diagram showing a format of illumination variable image data by areas 244.

25 FIG. 11 is a diagram showing a structure of a color reproduction system relating to a fourth embodiment of the present invention.

FIG. 12 is a diagram showing distributions of certain specific color spaces in a color space of various objects in a natural world.

FIG. 13 is a flowchart showing details of an
5 algorithm for carrying out a processing of the fourth embodiment.

FIG. 14 is a diagram showing a structure of a color reproduction system relating to a fifth embodiment of the present invention.

10 FIG. 15 is a flowchart showing details of an algorithm for carrying out a processing of the fifth embodiment.

FIG. 16 is a diagram showing a structure of a color reproduction system relating to a sixth
15 embodiment of the present invention.

FIG. 17 is a diagram for explaining a seventh embodiment of the present invention.

FIG. 18 is a diagram showing a structure of a color reproduction system relating to the seventh
20 embodiment of the present invention.

FIG. 19 is a diagram showing a distribution of a spectral reflectance space of a subject in a multi-dimensional space of a spectrum.

FIG. 20 is a diagram for explaining an eighth
25 embodiment of the present invention.

FIG. 21 is a diagram showing a structure of a color reproduction system relating to the eighth

embodiment of the present invention.

FIG. 22 is a diagram for explaining a ninth embodiment of the present invention.

FIG. 23 is a diagram showing a structure of a conventional color reproduction system.

FIG. 24 is a block diagram showing a structure of a color reproduction system relating to a tenth embodiment of the present invention.

FIG. 25 is a diagram showing a detailed example of a subject spectral reflectance database in the tenth embodiment.

FIG. 26 is a block diagram showing a structure of an LUT data calculating unit in the tenth embodiment.

FIG. 27 is a diagram showing a detailed example of a database photographic signal in the tenth embodiment.

FIG. 28 is a conceptual diagram for explaining sample photographic signals and a selection of a nearest photographic signal in the tenth embodiment.

FIG. 29 is a block diagram showing a structure of a color conversion LUT calculating unit in FIG. 26.

FIG. 30 is a block diagram showing a structure of a monitor input signal calculating unit in FIG. 29.

FIG. 31 is a block diagram showing a structure of a data interpolating unit in FIG. 29.

FIG. 32 is a block diagram showing a structure of a color reproduction system relating to an eleventh embodiment of the present invention.

FIG. 33 is a block diagram showing a structure of an LUT data calculating unit in the eleventh embodiment.

FIG. 34 is a block diagram showing a structure of a color conversion LUT calculating unit in FIG. 33.

5 DETAILED DESCRIPTION OF THE INVENTION

Embodiments of the present invention will be now be explained in detail with reference to the attached drawings.

(First Embodiment)

10 FIG. 1 is a diagram showing a structure of a color reproduction system relating to a first embodiment of the present invention. This color reproduction system consists of an image input unit 100 for photographing an image of an object, a color correcting section 200 for correcting the input image and generating an output image, and an image output unit 300.

15 In the color correcting section 200, an object recognizing section 201 recognizes an object within an input image. In other words, an area dividing section 201-1 of the object recognizing section 201 divides the input image into images of a plurality of areas. An input profile selecting section 201-2 selects a suitable input profile from among a plurality of input profiles for each divided area by changing over a switch 205. A device-independent color converting section 202 has a memory unit for storing a plurality of input profiles 1 to n (2021 to 202n). The

20

25

device-independent color converting section 202
converts an image in each area into a device-
independent color image by using an input profile that
has been selected from among the plurality of input
5 profiles 1 to n (2021 to 202n) by the input profile
selecting section 201-2. An image combining section
203 combines the device-independent color images
converted into images of divided areas into one device-
independent color image. A device value converting
10 section 204 converts the combined device-independent
color image into an output image by referring to an
output profile 2040.

FIG. 2 is a diagram showing a detailed structure
of the device-independent color converting section 202.
15 The device-independent color converting section 202
consists of the above memory section for storing the
plurality of input profiles 1 to n (2021 to 202n), an
input profile preparing section 2031 for calculating an
input profile based on at least one set of information
20 of characteristics and setting of an image input unit
used for a photographing (image input unit information),
spectrum data of an illumination light used for
photographing an image of an object by the image input
unit (photographic illumination light information),
25 spectrum data of an illumination light at a position
where the image of the photographed object is to be
observed (observation illumination light information),

and statistical characteristics of a spectral
reflectance of the photographed object (subject
characteristic information), and an input profile
working section 2030 for working the prepared input
5 profile onto the input image in each divided area to
convert the input image into a device-independent color
image.

FIG. 3 is diagram showing details of the device
value converting section 204. The device value
10 converting section 204 consists of an output profile
preparing section 2043 for calculating an output
profile 2042 based on input information on an output
unit (image output unit information), and an output
profile working section 2041 for working the prepared
15 output profile 2042 onto a device-independent color
image to convert the device-independent color image
into an output image.

The use of the above image input unit information
makes it possible to convert an input image into a
20 device-independent color image by taking into
consideration differences in characteristics of various
image input units and differences in the setting of
photographing. It is possible to achieve a color
reproduction in high precision when the image input
25 unit 100 is a multi-spectrum camera or a digital camera
for photographing a plurality of spectrum images.

Further, the use of the photographic illumination

light information makes it possible to cancel influence of the illumination light at the time of the photographing. In other words, it is possible to calculate an accurate spectral reflectance of an object
5 itself when the object is photographed by using any illumination light such as, for example, a fluorescent light, an incandescent light, solar beams, etc.

Further, the use of the observation illumination light information makes it possible to convert the
10 colors of a photographed object into colors under any illumination light. For example, by a remote-control reproduction of colors of an object under a different illumination, it is possible to display the colors of the object as if the object is positioned at the place
15 of observation.

Further, the use of the subject characteristic information makes it possible to estimate a color reproduction image in high precision even if the input image has little spectrum information. In other words,
20 it is possible to estimate a spectral reflectance of an object in high precision when an image input unit is a digital camera for photographing a color image of RGB three bands instead of a digital camera for photographing a color image of a plurality of spectra.
25 The subject characteristic information may be a correlation matrix or a base function that represents statistical characteristics of a spectral reflectance.

Further, the use of the image output unit information makes it possible to convert in high precision a device-independent color image into an output image that matches the image output unit 300.

5 This makes it possible to reproduce colors by taking into consideration differences in characteristics and variations between monitors and between printers.

As explained above, according to the present embodiment, an input image is divided into images of a plurality of areas, and an input profile is to be used for each divided area is selected from among a plurality of input profiles. The input image is converted into a device-independent color image by using a selected input profile. Thus, it is possible to make an accurate decision on the photographed object within an image, and to use an input profile that is suitable for the subject characteristics of the object. Therefore, it is possible to achieve a color reproduction in high precision for all parts of the image.

FIG. 4 shows a modification of the first embodiment. This shows an example of an image processing unit having a plurality of input profiles (1 to N) by using the subject characteristic information. Usually, it is difficult to pick up an image of only a desired object in one picture. A background of the selected object and other objects are also included in

the same picture. When colors of these objects are processed for reproduction by using only the input profile that uses characteristic information of one subject, it is possible to reproduce the colors of the
5 desired object in high precision. However, colors of the background and other objects are not reproduced in high precision.

To solve this problem, a color correcting section 200 in FIG. 4 uses a plurality of input profiles 2021
10 to 202N that use characteristic information of various subjects including a person, an animal and a plant. An object recognizing section 201 decides what has been photographed in a certain area within the image based on a signal value of an input image, and selects a
15 suitable input profile from among a plurality of input profiles. A device-independent color converting section 202 works an input profile selected from among a plurality of input profiles 2021 to 202N onto the input image, thereby to prepare a device-independent
20 color image. It is also possible to prepare a plurality of pieces of subject characteristic information in advance based on colors of objects or based on substances that constitute objects.

Assume that a spectral reflectance space of
25 subjects is distributed in a multi-dimensional space of a spectrum as shown in FIG. 5. In FIG. 5, $h(\lambda)$ represents a spectral sensitivity of a camera. On the

spectral sensitivity of $h(\lambda)$, a subject spectral reflectance that takes a value of a signal value p_1 represents all the points on a line perpendicular to $h(\lambda)$. When subject information of only one subject is
5 used like the conventional method, p_2 of a subject A and p_3 of a subject B take the same signal value. Therefore, in the estimate of spectral reflectances of these subjects based on this signal value, these subjects take the same spectral reflectance.

10 When two sets of subject characteristic information are used for the subject A and the subject B like the present embodiment, it becomes possible to estimate two spectral reflectances for the p_2 and p_3 , based on the same signal value p_1 . As explained above,
15 by using a plurality of sets of subject characteristics, it is possible to estimate spectral reflectances of subjects in high precision.

(Second Embodiment)

FIG. 6 is a diagram showing a structure of a color reproduction system relating to a second embodiment of
20 the present invention. This color reproduction system consists of an image input unit 100 for photographing an image of an object, a color correcting section 220 for correcting the input image and generating an output
25 image, and an image output unit 300.

In the color correcting section 220, an object recognizing section 221 recognizes an object within an

input image. In other words, an area dividing section 221-1 of the object recognizing section 221 divides the input image into images of a plurality of areas. An input/output profile selecting section 221-2 selects a
5 suitable input/output profile from among a plurality of input/output profiles for each divided area by changing over a switch 224. A device value converting section 222 has a memory unit for storing a plurality of input/output profiles 1 to N (2221 to 222N). The
10 device value converting section 222 converts an image in each area into a device-independent color image by using an input/output profile that has been selected from among the plurality of input/output profiles 1 to N (2221 to 222N) by the input/output profile selecting
15 section 221-2. An image combining section 223 combines the device-independent color images converted into images of divided areas into one device-independent color image.

FIG. 7 is a diagram showing a detailed structure
20 of the device value converting section 222. The device value converting section 222 consists of an input profile preparing section 2270 for calculating an input profile based on at least one set of information of characteristics and setting of an image input unit used
25 for a photographing (image input unit information), spectrum data of an illumination light used for photographing an image of an object by the image input

unit 100 (photographic illumination light information),
spectrum data of an illumination light at a position
where the image of the photographed object is to be
observed (observation illumination light information),
5 and statistical characteristics of a spectral
reflectance of the photographed object (subject
characteristic information), an output profile
preparing section 2260 for calculating an output
profile based on input information on an image output
10 unit (image output unit information), an input/output
profile preparing section 2240 for combining the
prepared input profile and the output profile to
prepare an input/output profile, and an input/output
profile working section 2230 for working the prepared
15 input/output profile onto the input image to convert
the input image into an output image.

The use of an input/output profile prepared by
combining the input profile and the output profile of
the first embodiment makes it possible to convert the
20 input image into a color-reproduced output image at a
higher speed.

FIG. 8 shows a modification of the second
embodiment. Usually, it is difficult to pick up an
image of only a desired object in one picture. A
25 background of the selected object and other objects are
also included in the same picture. When colors of
these objects are processed for reproduction by using

only the input profile that uses characteristic
information of one subject like the conventional method,
it is possible to reproduce the colors of the desired
object in high precision. However, colors of the
5 background and other objects are not reproduced in high
precision.

To solve this problem, a color correcting section
220 in FIG. 8 uses a plurality of input/output profiles
2221 to 222N that use characteristic information of
10 various subjects including a person, an animal and a
plant. An object recognizing section 221 decides what
has been photographed in a certain area within the
image based on a signal value of an input image, and
selects a suitable input/output profile from among a
15 plurality of input/output profiles. A input/output
profile working section 222 works an input/output
profile selected from among a plurality of input/output
profiles 2221 to 222N onto the input image, thereby to
prepare a device-independent color image.

20 (Third Embodiment)

FIG. 9 is a diagram showing a structure of a color
reproduction system relating to a third embodiment of
the present invention. This color reproduction system
consists of an image input unit 100 for photographing
25 an image of an object, a color correction pre-
processing section 240 for converting an input image
into illumination variable image data (illumination

variable image data by areas) 244, a color correcting
section 245 for preparing an input profile from the
illumination variable image data, converting the input
image into a device-independent color image, and then
5 converting the device-independent color image into an
output image that matches the image output unit, and
the image output unit 300 for outputting (displaying
and printing) an output image.

The third embodiment is characterized in that the
10 input image has information necessary for preparing a
plurality of input profiles, and has an illumination-
variable data structure that uses an input profile
according to each area within the image. In other
words, the input image has the image data of a subject
15 and any one set of the image input unit information,
photographic illumination light information,
observation illumination light information, and
characteristic information of a plurality of subjects,
that is necessary for preparing each input profile.

20 In the color correction pre-processing section 240,
an area dividing section 241-1 of an object recognizing
section 241 divides an input image into images of
divided areas. A subject characteristic selecting
section 241-2 selects a specific subject characteristic
25 from among a plurality of subject characteristics
included in the input image. A format converting
section 242 carries out a format conversion based on a

result of a selection by a photographic illumination light spectrum selecting section 243, and outputs a converted data as the illumination variable image data by areas 244.

5 In the color correcting section 245, an input profile calculating section 251 calculates an input profile from the illumination variable image data by areas. A device-independent color converting section 246 converts the illumination variable image data by
10 areas 244 into a device-independent color image by using an input profile that has been selected from among a plurality of input profiles 1 to N (2461 to 246N) corresponding to the calculated input profile by changing over a switch 250. An image combining section
15 248 combines device-independent color images by areas into one device-independent color image. A device value converting section 249 converts the device-independent color image into an output image that matches the image output unit by using an output
20 profile 2490.

FIG. 10 is a diagram showing a format of the illumination variable image data by areas 244. The illumination variable image data by areas 244 consists of a header 244-1 that includes information on a marker,
25 a format version, a size of an image, number of dimensions of the image, number of areas of the image, etc., photographic characteristic information 244-2

that includes information on camera spectral sensitivity, photographing shutter speed, photographing diaphragm, etc., photographing illumination light information 244-3 that includes information on a
5 starting wavelength, an ending wavelength, a wavelength interval, spectrum data, etc., an area table 244-4 that stores information on each area to which each pixel belongs (object spectrum statistical data to be used), subject characteristic information 1 (244-5) that
10 includes information on an object base function and eigen value data 1, subject characteristic information 2 (244-6) that includes information on an object base function and eigen value data 2, subject characteristic information 3 (244-7) that includes information on an
15 object base function and eigen value data 3, and image data 244-8 that includes data on monochromatic image \times number of dimensions of the image. Although FIG. 10 shows data having the three sets of subject characteristic information, it is also possible to
20 include more sets of subject characteristic information.
(Fourth Embodiment)

FIG. 11 is a diagram showing a structure of a color reproduction system relating to a fourth
embodiment of the present invention. The color
25 reproduction system consists of an image input unit 100 for photographing an image of an object, a color correcting section 260, and an image output unit 300

for outputting (displaying and printing) an output image.

The fourth embodiment is characterized in that after an input image has been divided into images of a plurality of areas, the images in these areas are converted into device-independent color images in parallel by using a plurality of input profiles.

In the color correcting section 260, an area dividing section 261 divides an input image into images of a plurality of areas. A device-independent color converting section 262 converts image data for each area into a device-independent color image by using a plurality of input profiles 1 to 3 (2621 to 2623). A conversion result selecting section 263 compares between results 1, 2 and 3 of device-independent color images obtained by the conversion based on the plurality of input profiles, and selects one device-independent color image. An image combining section 264 combines device-independent color images that have been selected by areas into one device-independent color image.

A device value converting section 265 converts the device-independent color image into an output image that matches the image output unit by using an output profile 2650.

Colors of a human body skin and a cloth of clothes form a limited small space in a total color space of

various objects in the natural world, as shown in
FIG. 12. Therefore, when colors of a specific subject
are reproduced based on subject characteristic
information that represents total objects in the
5 natural world, there is small error in the reproduced
colors. However, on the contrary, when colors of other
objects are reproduced based on characteristic
information of a certain specific subject, there arises
a large error in the reproduced colors.

10 FIG. 13 is a flowchart showing details of an
algorithm for carrying out a processing of the fourth
embodiment. A threshold value used in the following
explanation is one example, and the threshold value is
not limited to this example. A color difference 3.2
15 means a color difference in $L^*a^*b^*$ space. This is a
difference between colors (color difference) that
cannot be distinctly recognized as a different color by
human beings when the object is in a distance.

Although the three sets of subject characteristic
20 information are used for processing them in parallel in
the present embodiment, it is also possible to use more
sets of subject characteristic information.

First, a chromaticity value is calculated based on
total subject characteristic information (at step S1).

25 Next, a chromaticity value is calculated based on
specific subject characteristic information 1 (at step
S2). Next, a chromaticity value is calculated based on

specific subject characteristic information 2 (at step S3). A decision is made as to whether a color difference between the chromaticity value obtained at the step S1 and the chromaticity value obtained at the step S2 is within a threshold value ($\Delta E_{3.2}$) or not (at step S4). When a decision is YES, a result of the specific subject characteristic information 1 is used (at step S8), and images are combined together (at step S9).

When a decision made at the step S4 is NO, a decision is made as to whether a color difference between the chromaticity value obtained at the step S1 and the chromaticity value obtained at the step S3 is within the threshold value ($\Delta E_{3.2}$) or not (at step S5).

When a decision is YES, a result of the specific subject characteristic information 2 is used (at step S6), and images are combined together (at step S9). When a decision made at the step S5 is NO, a result of the total subject characteristic information is used (at step S7), and images are combined together (at step S9).

(Fifth Embodiment)

FIG. 14 is a diagram showing a structure of a color reproduction system relating to a fifth embodiment of the present invention. This color reproduction system consists of an image input unit 100 for photographing an image of an object, a color

correcting section 280 for correcting the input image and generating an output image, and an image output unit 300 for outputting (displaying and printing) an output image.

5 The fifth embodiment is characterized in that after an input image has been divided into images of a plurality of areas, the images in these areas are converted into device-independent color images in hierarchy by using a plurality of input profiles.

10 In the color correcting section 280, an area dividing section 281 divides an input image into images of a plurality of areas. A device-independent color converting section 1 (282) converts image data for each area into a device-independent color image by first
15 using one input profile 1 (281). A conversion result judging section 283 decides one input profile to be used from among the plurality of input profiles based on a result of the conversion by the device-independent color converting section 1 (282). A device-independent
20 color converting section 2 (284) converts the input image divided into areas into device-independent color images again by using an input profile selected from input profiles 2 and 3 (2841 and 2842) by changing over a switch 287 according to a result of a decision made
25 by the conversion result judging section 283. An image combining section 285 combines the device-independent color images by areas into one device-independent color

image.

A device value converting section 286 converts the device-independent color image into an output image that matches the image output unit by using an output
5 profile 2860.

FIG. 15 is a flowchart showing details of an algorithm for carrying out a processing of the fifth embodiment. First, a chromaticity value is calculated based on total subject characteristic information of
10 natural objects (at step S20). A decision is made as to whether the chromaticity value obtained at the step S20 is sufficiently close to the chromaticity value of a specific subject 1 (for example, colors of a human body skin) (at step S21). When a decision is YES, a
15 chromaticity value is calculated based on the specific subject characteristic information 1 (at step S25). Next, a result of the specific subject characteristic information 1 is used (at step S26), and images are combined together (at step S24).

20 When a decision made at the step S21 is NO, a decision is made as to whether the chromaticity value is sufficiently close to the chromaticity value of a specific subject 2 (at step S22). When a decision is YES, a chromaticity value is calculated based on the
25 specific subject characteristic information 2 (at step S27). Next, a result of the specific subject characteristic information 2 is used (at step S28), and

images are combined together (at step S29).

When a decision made at the step S22 is NO, a result of the total subject characteristic information is used (at step S23), and images are combined together
5 (at step S24).

In other words, in the present embodiment, a chromaticity value is calculated based on the total subject characteristic information of natural objects. The conversion result judging section 283 checks
10 whether the chromaticity value obtained is sufficiently close to the chromaticity value of the specific subject 1 (for example, colors of a human body skin) or the chromaticity value is sufficiently close to the chromaticity value of a specific subject 2 (for example,
15 colors of cloth). When the chromaticity is sufficiently close to a certain specific subject, an area image is converted into a device-independent color image again by using an input profile calculated from the specific subject characteristic information
20 according to this specific subject. In other cases, a result of a conversion using an input profile calculated based on the total subject characteristic information of natural objects is used.

In the present embodiment, there has been
25 explained a case of carrying out image color conversion by using one set of total subject information and two sets of specific subject information. However, it is

also possible to use more sets of subject information or to carry out a hierarchical conversion by dividing the process into more steps.

(Sixth Embodiment)

5 FIG. 16 is a diagram showing a structure of a color reproduction system relating to a sixth embodiment of the present invention. This color reproduction system consists of an image input unit 100 for photographing an image of an object, a color
10 correcting section 310 for correcting the input image and generating an output image, and an image output unit 300 for outputting (displaying and printing) an output image.

15 The present embodiment is characterized in that the color reproduction system has a spectral reflectance database, and obtains subject characteristic information for each input image by calculation based on spectral reflectance data.

20 In the color correcting section 310, an area dividing section 311 divides an input image into images of a plurality of areas. A device-independent color converting section 1 (312) as a spectral reflectance estimating section first converts image data for each area into a device-independent color image of an
25 estimated spectral reflectance by referring to one input profile 1 (3121) as a base of all natural objects.

 A conversion result judging section 313 compares a

spectral reflectance database 317 in which spectral reflectances of various objects have been registered with the spectral reflectance stored in the spectral reflectance database 317 based on the result of the
5 device-independent color converting section 1 (312), and checks chromaticity data that is closest to estimated data.

A subject characteristic information calculating section 316 selects data in the spectral reflectance
10 database 317 based on the result of the conversion result judging section 313, calculates subject characteristic data, and inputs the calculated data to a device-independent color converting section 2 (315). A device-independent color converting section 2 (315)
15 as a spectral reflectance estimating section 2 prepares an input profile 2 (a base of a red-color natural object) 3152, an input profile 3 (a base of a blue-color natural object) 3153, and an input profile 4 (a base of a green-color natural object) 3154, based on
20 calculated subject characteristic data, and stores these files in a memory section. The device-independent color converting section 2 (315) converts the input image divided into areas into a device-independent color image 1 again by using a input
25 profile selected from among the plurality of input profiles 2 to 4 (3152 to 3154) by changing over a switch 324 according to a decision made by the

conversion result judging section 313. This is a spectral reflectance estimated by the input profile 2, 3 or 4.

5 The four input profiles 1 (3151), 2 (3152), 3 (3153) and 4 (3154) are prepared based on the setting of a photographing side illumination light setting section 314 and an image input unit characteristic setting section 318 and subject characteristic information calculated from data within a spectral
10 reflectance DB.

A device-independent color converting section 3 (319) as an illumination converting section converts the device-independent color image 1 into a device-independent color image 2 as a chromaticity value
15 obtained by illumination conversion based on an input profile 5 (illumination conversion), by referring to the input profile 5. The input profile 5 is prepared based on input profile calculation data from an observation side illumination light setting section 320.

20 An image combining section 322 combines input device-independent color images 2 by areas. A device value converting section 323 converts the combined image into an output image that matches the device by referring to an output profile 3230. The output
25 profile 3230 is prepared based on output profile calculation data that is set from an image output unit characteristic setting section 321. The output image

obtained by the device value converting section 323 is output to the image output unit 300.

The subject characteristic information may be either a correlation matrix or a base function that represents statistical characteristics of a spectral reflectance.

(Seventh Embodiment)

FIG. 17 is a diagram for explaining a seventh embodiment of the present invention. According to the seventh embodiment, a digital camera 406 photographs a color chart 400 of a known spectral reflectance to form a color chart photographic image 401. The color chart photographic image 401 is input to an input profile selecting section 402. Based on a signal value of this image, an input profile 403 to be used for an illumination conversion of an object photographic image is selected and is input to an input profile working section 404. At the same time, an object photographic image 407 of an object 405 photographed by the digital camera 406 is input to the input profile working section 404. The input profile working section 404 works the input profile 403 onto the object photographic image 407 to convert the object photographic image into a device-independent color image.

FIG. 18 is a diagram showing a structure of a color reproduction system relating to the seventh

embodiment of the present invention. This color reproduction system consists of an image input unit 100 for photographing an image of an object and an image of a color chart, a color correcting section 330, and an
5 image output unit 300 for outputting (displaying and printing) an output image.

In the color correcting section 330, an image type selecting section 331 selects a type of an image. An object recognizing section 332 divides an object
10 photographic image into images of a plurality of areas, and selects an input profile to be used from among a plurality of input profiles by referring to signal values of the color chart photographic image and the object photographic image. An input profile preparing
15 section 336 in a device-independent color converting section 333 prepares a plurality of input profiles 3351 to 335N to be selected by the object recognizing section 332. An input profile working section 334 prepares a device-independent color image by working an
20 input profile that has been selected from among the plurality of input profiles 1 to N (3351 to 335N) by changing over a switch 332-1 onto the object photographic image. An image combining section 337 combines device-independent color images by areas into
25 one device-independent color image. A device value converting section 338 converts the device-independent color image into an output image that matches the

device by referring to an output profile 3380.

Assume that a spectral reflectance space of subjects is distributed in a multi-dimensional space of a spectrum as shown in FIG. 19. In this case, $h(\lambda)$ represents a spectral sensitivity of a camera. On the spectral sensitivity of $h(\lambda)$, a subject spectral reflectance that takes a value of a certain signal value represents all the points on a line perpendicular to $h(\lambda)$.

When one conversion matrix is used like the conventional method, the spectral reflectance of a subject is projected to one axis of poor linearity, and thereafter the spectral reflectance is projected to the spectral sensitivity $h(\lambda)$ of the camera. According to the present embodiment, the conversion matrix to be used is changed over depending on the signal value. Therefore, it is possible to project the spectral reflectance to a plurality of axes of satisfactory linearity. As a result, it is possible to obtain color reproduction in high precision.

(Eighth Embodiment)

FIG. 20 is a diagram for explaining an eighth embodiment of the present invention. According to the eighth embodiment, a digital camera 508 photographs a color chart 500 of a known spectral reflectance to form a color chart photographic image 501. The color chart photographic image 501 is input to a subject

characteristic information calculating section 503.
The subject characteristic information calculating
section 503 calculates subject characteristic
information based on data in a color chart spectral
5 reflectance database (DB) 502. An input profile
preparing section 504 prepares an input profile 505 for
illumination-converting a subject photographic image
509 based on the subject characteristic information
calculated. The subject photographic image 509 is
10 obtained by photographing an object 506 by the digital
camera 508. An input profile working section 507 works
the input profile 505 onto the subject photographic
image 509 to obtain and output a device-independent
color image.

15 FIG. 21 is a diagram showing a structure of a
color reproduction system relating to the eighth
embodiment of the present invention. This color
reproduction system consists of an image input unit 100
for photographing an image of an object, a color
20 correcting section 430, and an image output unit 300
for outputting (displaying and printing) an output
image.

In the color correcting section 430, an image type
selecting section 431 selects a type of an image. An
25 object recognizing section 432 divides an object
photographic image into images of a plurality of areas,
and selects an input profile to be used from among a

plurality of input profiles based on the object
photographic image divided into areas. An input
profile preparing section 436 in a device-independent
color converting section 433 prepares a plurality of
5 input profiles 1 to N (4351 to 435N) to be selected by
the object recognizing section 432. In the present
embodiment, the color correcting section 430 includes a
subject characteristic information calculating section
437 for calculating subject characteristic information
10 based on data in a spectral reflectance database 438
and giving this calculated information to the input
profile preparing section 436.

An input profile working section 434 prepares a
device-independent color image by working an input
15 profile that has been selected from among the prepared
input profiles 1 to N (4351 to 435N) by changing over a
switch 432-1 onto the object photographic image. An
image combining section 439 combines device-independent
color images by areas into one device-independent color
20 image. A device value converting section 440 converts
the combined device-independent color image into an
output image that matches the device by referring to an
output profile 4400.

According to the present embodiment, a signal
25 value of the color chart photographic image is checked.
When this signal value is closer to the signal value of
the object photographic image, the subject

characteristic information is calculated based on the spectral reflectance of this color chart. As subject characteristic is calculated for each input image without having the subject characteristic information, it is possible to carry out a color reproduction in high precision. The subject characteristic information may be a correlation matrix or a base function that represents statistical characteristics of a spectral reflectance.

10 (Ninth Embodiment)

A ninth embodiment of the present invention will be explained with reference to FIG. 22. The ninth embodiment is characterized in that a color reproduction is carried out by using a program that achieves an illumination conversion processing by areas as one function of an image processing software for a digital camera.

Referring to FIG. 22, an image file of an object obtained by photographing the object by a digital camera 600 is read. This image is displayed on a display screen 601, and a predetermined area of the image is designated with a mouse to divide the area. Alternately, the area may be divided automatically by using RGB value rates. Thereafter, a user carries out a suitable illumination conversion for each area within the image by selecting information of subject characteristic information, observation illumination

information, etc. An area designation and an illumination conversion are carried out repeatedly on the image to achieve illumination conversion by areas. After that, images in all areas are combined into one
5 image, thereby to achieve color correction in high precision.

According to the above-described first to ninth embodiments, an image is divided into images of a plurality of areas, and colors are converted suitably
10 in each area. Therefore, it is possible to obtain a color reproduction system capable of carrying out color reproduction of all objects included in the image in high precision.

Further, as objects within the photographed image
15 are recognized correctly and a suitable color conversion is carried out for each object, it is possible to obtain a color reproduction system capable of carrying out color reproduction in high precision.

Further, a color chart of a known spectral
20 reflectance is photographed, and subject characteristic is calculated based on a spectral reflectance of a color chart closest to the signal value at the time of the photographing of an object. Therefore, it is possible to obtain a color reproduction system capable
25 of carrying out color reproduction in high precision, without having subject characteristic information in advance.

(Tenth Embodiment)

FIG. 24 shows a structure of a color reproduction system relating to a tenth embodiment of the present invention. This color reproduction system consists of
5 a digital camera 801 as a color photographing section, a color correcting section 802 having a color estimating function, and a CRT monitor 803.

The digital camera 801 has three bands of red (R), green (G) and blue (B). The digital camera 801
10 photographs a subject, and outputs photographic image data (a subject photographic image) of three channels for each pixel, to the color correcting section 802. The photographic image data of each channel has a signal value of one byte (0 to 255). The color
15 correcting section 802 converts the input photographic image data into a monitor input signal suitable for display in the CRT monitor 803, and outputs the converted signal to the CRT monitor 803. A subject image is displayed as a color image on the CRT
20 monitor 803.

The color correcting section 802 consists of a color converting unit 811, an LUT data memory unit 812, an LUT data calculating unit 813, and a characteristic data memory unit 814.

25 Each unit of the color correcting section 802 will be explained in detail. First, the color converting unit 811 refers to data R' , G' and B' in a lookup table

(LUT) within the LUT data memory unit 812 by using RGB values as an address of the photographic image data that has been input from the digital camera 801. The color converting unit 811 then outputs the LUT data R', G' and B' as monitor input signals to the CRT monitor 803.

The LUT data memory unit 812 stores in advance LUT data calculated by the LUT data calculating unit 813. The LUT data consists of monitor input signals corresponding to all the signal values of the photographic image data, that is, R', G' and B' of 256^3 . R', G' and B' are one-byte data for each channel.

The LUT data calculating unit 813 inputs data including a spectral sensitivity of the digital camera 801 (hereinafter to be referred to as a digital camera spectral sensitivity), photographic illumination light spectrum, an observation illumination light spectrum, color matching functions, a subject spectral reflectance database, and a monitor profile from the characteristic data memory unit 814. The LUT data calculating unit 813 calculates the LUT data by using these data. Each data of the digital camera spectral sensitivity, the photographic illumination light spectrum, the observation illumination light spectrum, the color matching functions, the subject spectral reflectance database, and the monitor profile stored in the characteristic data memory unit 814 has the

following construction.

The data of the digital camera spectral sensitivity consists of sensitivity data of $r(\lambda)$, $g(\lambda)$ and $b(\lambda)$ each representing a spectral sensitivity of the digital camera 801 for colors R, G and B respectively that are set in 1 nm interval in a wavelength area of 380 nm to 780 nm.

Each data of the photographic illumination light spectrum and the observation illumination light spectrum consists of light intensity data $E_m(\lambda)$ and $E_o(\lambda)$ of the photographic illumination light spectrum and the observation illumination light spectrum respectively set in 1 nm interval in a wavelength area of 380 nm to 780 nm.

The data of the color matching functions are color matching functions $x(\lambda)$, $y(\lambda)$ and $z(\lambda)$ prescribed by the CIE. These data are interpolated to have data in 1 nm interval in a wavelength area of 380 nm to 780 nm.

The subject spectral reflectance database is a set of a large number of spectral reflectance data measured for objects in the real world. FIG. 25 shows an example of the subject spectral reflectance database. Each spectral reflectance data $f_i(\lambda)$ ($i = 1$ to 1000) has spectral reflectance data in 1 nm interval in a wavelength area of 380 nm to 780 nm, and is managed by a registration number i . The spectral reflectance data

fi (λ) registered in the subject spectral reflectance database includes data of objects photographed by the digital camera 801 such as, for example, a plant, a rock, a human skin, a color chart, a picture, a dye, a pigment, etc. The number of objects is assumed as 1000 in this embodiment. However, it is also possible to add data according to the need. The number of registration data is optional.

The monitor profile consists of a matrix M and gradation correction data T. The matrix M is a matrix having elements of $X_r Y_r Z_r$, $X_g Y_g Z_g$ and $X_b Y_b Z_b$ as XYZ tristimulus values of display colors in input signals (255, 0, 0), (0, 255, 0) and (0, 0, 255) of the CRT monitor 3.

$$M = \begin{pmatrix} X_r X_g X_b \\ Y_r Y_g Y_b \\ Z_r Z_g Z_b \end{pmatrix}$$

The gradation data are table data γ_r (R), γ_g (G) and γ_b (B) that give a relationship of output luminance to each input signal of R, G and B of the CRT monitor 803. Each data is normalized to have a maximum value of 1.

FIG. 26 shows a structure of the LUT data calculating unit 813. The LUT data calculating unit 813 consists of a database photographic signal calculating unit 821, a database photographic signal memory unit 822, a sample data calculating unit 823, and a color conversion LUT calculating unit 824. The database photographic signal calculating unit 821 reads

all data of the digital camera spectral sensitivity,
the photographic illumination light spectrum and the
subject spectral reflectance database from the
characteristic data memory unit 814 shown in FIG. 24,
5 and calculates values of photographic signals RiGiBi
for spectral reflectance data $f_i(\lambda)$ in the subject
spectral reflectance database. The values of the
photographic signals RiGiBi are estimated by the
following equations.

10

$$R_i = \int_{\lambda=380}^{780} r(\lambda)E_m(\lambda)f_i(\lambda)d\lambda$$

$$G_i = \int_{\lambda=380}^{780} g(\lambda)E_m(\lambda)f_i(\lambda)d\lambda$$

$$B_i = \int_{\lambda=380}^{780} b(\lambda)E_m(\lambda)f_i(\lambda)d\lambda$$

The values of the photographic signals RiGiBi are
stored in the database photographic signal memory unit
822 together with the registration numbers i of the
15 corresponding spectral reflectance data $f_i(\lambda)$ as shown
in FIG. 27. The sample data calculating unit 823
selects ten photographic signals RiGiBi in the small to
large order of a distance Di from a predetermined
sample photographic signal RsGsBs judged by the
20 following expression. The sample data calculating unit
823 then outputs the registration numbers i and the
sample photographic signal RsGsBs to the color

conversion LUT calculating unit 824.

$$D_i = \sqrt{(R_S - R_i)^2 + (G_S - G_i)^2 + (B_S - B_i)^2}$$

FIG. 28 shows a concept of the sample photographic
5 signal RsGsBs and a selection of the ten photographic
signals RiGiBi nearest to the sample photographic
signal. A mark of + shows the sample photographic
signal RsGsBs, and black marks show the ten
photographic signals RiGiBi nearest to the sample
10 photographic signal.

FIG. 29 shows a structure of the color conversion
LUT calculating unit 824. The color conversion LUT
calculating unit 824 consists of a correlation matrix
calculating unit 831, a tristimulus value calculating
15 unit 832, a monitor input signal calculating unit 833
and a data interpolating unit 834. The registration
numbers i of the ten photographic signals RiGiBi
selected by the sample data calculating unit 823 in
FIG. 26 are input to the correlation matrix calculating
20 unit 831. The correlation matrix calculating unit 831
inputs the subject spectral reflectance data of the
registration numbers i as subject spectral reflectance
sample data from the characteristic data memory unit
814 shown in FIG. 24, and calculates a correlation
25 matrix A, as shown by the following expression, as
statistical data of the spectral reflectance of the
subject.

$$A = \begin{pmatrix} \langle f_i(380)f_i(380) \rangle & \langle f_i(380)f_i(381) \rangle & \dots & \langle f_i(380)f_i(780) \rangle \\ \langle f_i(381)f_i(380) \rangle & \langle f_i(381)f_i(381) \rangle & \dots & \langle f_i(381)f_i(780) \rangle \\ \vdots & \vdots & \ddots & \vdots \\ \langle f_i(780)f_i(380) \rangle & \langle f_i(780)f_i(381) \rangle & \dots & \langle f_i(780)f_i(780) \rangle \end{pmatrix}$$

In the above expression, $\langle \rangle$ represents an average value of the ten spectral reflectance data.

The correlation matrix A calculated by the correlation matrix calculating unit 831 is output to the tristimulus value calculating unit 832. The tristimulus value calculating unit 832 calculates XYZ tristimulus values of the subject under the observation illumination light by the following expression based on the correlation matrix A input from the correlation matrix calculating unit 831, the digital camera spectral sensitivity, the photographic illumination light spectrum, the observation illumination light spectrum and the color matching functions input from the characteristic data memory unit 814 shown in FIG. 24, and the sample photographic signal $R_s G_s B_s$ input from the sample data calculating unit 823.

$$C = K_1 K_2^{-1} Q$$

where

$$\begin{aligned} C &= (XYZ)^t \\ Q &= (R_s G_s B_s)^t \end{aligned}$$

$$K_1 = \begin{pmatrix} \begin{pmatrix} \int_{\lambda=380}^{780} E_O(\lambda)x(\lambda)\langle \xi_1(\lambda)E_1(\lambda') \rangle E_m(\lambda)z(\lambda')d\lambda d\lambda' & \int_{\lambda=380}^{780} E_O(\lambda)x(\lambda)\langle \xi_1(\lambda)E_1(\lambda') \rangle E_m(\lambda)g(\lambda')d\lambda d\lambda' & \int_{\lambda=380}^{780} E_O(\lambda)x(\lambda)\langle \xi_1(\lambda)E_1(\lambda') \rangle E_m(\lambda)b(\lambda')d\lambda d\lambda' \\ \int_{\lambda=380}^{780} E_O(\lambda)y(\lambda)\langle \xi_1(\lambda)E_1(\lambda') \rangle E_m(\lambda)z(\lambda')d\lambda d\lambda' & \int_{\lambda=380}^{780} E_O(\lambda)y(\lambda)\langle \xi_1(\lambda)E_1(\lambda') \rangle E_m(\lambda)g(\lambda')d\lambda d\lambda' & \int_{\lambda=380}^{780} E_O(\lambda)y(\lambda)\langle \xi_1(\lambda)E_1(\lambda') \rangle E_m(\lambda)b(\lambda')d\lambda d\lambda' \\ \int_{\lambda=380}^{780} E_O(\lambda)z(\lambda)\langle \xi_1(\lambda)E_1(\lambda') \rangle E_m(\lambda)z(\lambda')d\lambda d\lambda' & \int_{\lambda=380}^{780} E_O(\lambda)z(\lambda)\langle \xi_1(\lambda)E_1(\lambda') \rangle E_m(\lambda)g(\lambda')d\lambda d\lambda' & \int_{\lambda=380}^{780} E_O(\lambda)z(\lambda)\langle \xi_1(\lambda)E_1(\lambda') \rangle E_m(\lambda)b(\lambda')d\lambda d\lambda' \end{pmatrix} \end{pmatrix}$$

$$= \begin{aligned} & \left(\begin{array}{l} \text{[780]} \\ \lambda = 380 \end{array} \text{E}_m(\lambda) \text{r}(\lambda) \langle \text{F}_1(\lambda) \text{F}_1(\lambda') \rangle \text{E}_m(\lambda) \text{r}(\lambda') \text{d}\lambda \text{d}\lambda', \begin{array}{l} \text{[780]} \\ \lambda' = 380 \end{array} \text{E}_m(\lambda) \text{r}(\lambda) \langle \text{F}_1(\lambda) \text{F}_1(\lambda') \rangle \text{E}_m(\lambda) \text{g}(\lambda') \text{d}\lambda \text{d}\lambda', \begin{array}{l} \text{[780]} \\ \lambda = 380 \end{array} \text{E}_m(\lambda) \text{r}(\lambda) \langle \text{F}_1(\lambda) \text{F}_1(\lambda') \rangle \text{E}_m(\lambda) \text{g}(\lambda) \text{F}_1(\lambda') \rangle \text{E}_m(\lambda) \text{b}(\lambda') \text{d}\lambda \text{d}\lambda', \right. \\ & \text{[780]} \text{E}_m(\lambda) \text{g}(\lambda) \langle \text{F}_1(\lambda) \text{F}_1(\lambda') \rangle \text{E}_m(\lambda) \text{r}(\lambda') \text{d}\lambda \text{d}\lambda', \text{[780]} \text{E}_m(\lambda) \text{g}(\lambda) \langle \text{F}_1(\lambda) \text{F}_1(\lambda') \rangle \text{E}_m(\lambda) \text{g}(\lambda') \text{d}\lambda \text{d}\lambda', \text{[780]} \text{E}_m(\lambda) \text{g}(\lambda) \langle \text{F}_1(\lambda) \text{F}_1(\lambda') \rangle \text{E}_m(\lambda) \text{b}(\lambda') \text{d}\lambda \text{d}\lambda', \\ & \left. \text{[780]} \text{E}_m(\lambda) \text{b}(\lambda) \langle \text{F}_1(\lambda) \text{F}_1(\lambda') \rangle \text{E}_m(\lambda) \text{r}(\lambda') \text{d}\lambda \text{d}\lambda', \text{[780]} \text{E}_m(\lambda) \text{b}(\lambda) \langle \text{F}_1(\lambda) \text{F}_1(\lambda') \rangle \text{E}_m(\lambda) \text{g}(\lambda') \text{d}\lambda \text{d}\lambda', \text{[780]} \text{E}_m(\lambda) \text{b}(\lambda) \langle \text{F}_1(\lambda) \text{F}_1(\lambda') \rangle \text{E}_m(\lambda) \text{b}(\lambda') \text{d}\lambda \text{d}\lambda' \right) \end{aligned}$$

The XYZ tristimulus values calculated by the tristimulus value calculating unit 832 are output to the monitor input signal calculating unit 833. The monitor input signal calculating unit 833 converts the XYZ tristimulus values into a sample monitor input signal by using the monitor profile input from the characteristic data memory unit 814 shown in FIG. 24, and outputs the converted signal to the data interpolating unit 834.

FIG. 30 shows a structure of the monitor input signal calculating unit 833. The monitor input signal calculating unit 833 consists of a matrix converting unit 841 and a gradation correcting unit 842.

The matrix converting unit 841 converts the XYZ tristimulus values input from the tristimulus value calculating unit 832 shown in FIG. 29 into $R''G''B''$ s by the following expression based on the matrix M of the monitor profile input from the characteristic data memory unit 814 shown in FIG. 24. The matrix converting unit 841 outputs a result of the conversion to the gradation correcting unit 842.

$$P = M^{-1}C$$

where

$$P = (R''G''B'')^t$$

The gradation correcting unit 842 carries out a gradation correction of $R''G''B''$ s input from the matrix converting unit 841 by the following expression based

on an inverse function $\gamma^{-1} ()$ of gradation correction data $\gamma ()$ input from the characteristic data memory unit 814 shown in FIG. 24. The gradation correcting unit 842 outputs the gradation-corrected data as a sample monitor input signal R'sG'sB's to the data interpolating unit 834 shown in FIG. 29.

$$\begin{aligned} R'_s &= \gamma_r^{-1}(R''_s) \\ G'_s &= \gamma_g^{-1}(G''_s) \\ B'_s &= \gamma_b^{-1}(B''_s) \end{aligned}$$

The gradation correcting unit 842 carries out the above gradation correction processing to the predetermined sample photographic signals RsGsBs, and stores the results as sample monitor input signals R'sG'sB's in the data interpolating unit 834. The data interpolating unit 834 obtains by interpolation a monitor input signal corresponding to the value of the photographic signal from among the sample photographic signals RsGsBs, and obtains LUT data having monitor input signal values corresponding to all the photographic signal values.

FIG. 31 shows a structure of the data interpolating unit 834. The data interpolating unit 834 consists of a data memory unit 851 and an interpolation calculating unit 852. The data memory unit 851 stores sample photographic signals input from the sample data calculating unit 823 shown in FIG. 26 and corresponding sample monitor input signal values

input from the monitor input signal calculating unit 833 shown in FIG. 29. The interpolation calculating unit 852 carries out an interpolation for all the photographic signal values based on the sample photographic signals near the photographic signal and corresponding sample monitor input signals, thereby to obtain monitor input signals corresponding to the photographic signals. The interpolation-calculating unit 852 then outputs a result of the interpolation to the LUT data memory unit 812 shown in FIG. 24. The method of interpolation to be used is optional. For signal values that cannot be interpolated based on the sample photographic signals and for signals that are not within the range from 0 to 255, it is possible to cope with the situation by replacing signals by mapping to the near region.

According to the color reproduction system having the above-described structure of the present embodiment, the color correcting section 802 estimates tristimulus color values of subjects by using statistical data A (the correlation matrix A in this example) of the spectral reflectance of the subjects. Colors are estimated by changing over the correlation matrix A as the statistical data according to photographic signals of the subjects obtained by photographing the subjects by the digital camera 801. More specifically, the correlation matrix A is used by changing over the

matrix according to the relationship between the spectral reflectance data $f_i(\lambda)$ for calculating the statistical data of the spectral reflectances and the subject photographic signals. With this arrangement, it is possible to estimate colors in higher precision than when the same statistical data is used for all the subject photographic signals.

(Eleventh Embodiment)

FIG. 32 shows a structure of a color reproduction system relating to an eleventh embodiment of the present invention. This color reproduction system consists of a digital camera 801 as a color photographing section, a color correcting section 802', a CRT monitor 803, and a color chart 804. The color chart 804 consists of patches having 16 independent spectral reflectances (a plurality of objects having known spectral reflectances), each patch having a constant spectral reflectance.

The digital camera 801 has three bands of red (R), green (G) and blue (B). The digital camera 801 photographs a subject, and outputs photographic image data (a subject photographic image) of three channels for each pixel, to the color correcting section 802'. The photographic image data of each channel has a signal value of one byte (0 to 255). The color correcting section 802' converts the input photographic image data into a monitor input signal suitable for

display in the CRT monitor 803, and outputs the converted signal to the CRT monitor 803. A subject image is displayed as a color image on the CRT monitor 803.

5 The color correcting section 802' consists of a color converting unit 811, an LUT data memory unit 812, an LUT data calculating unit 815, and a characteristic data memory unit 816. The color converting unit 811 and the LUT data memory unit 812 are similar to those
10 explained in the tenth embodiment, and therefore, their explanation will be omitted here.

 The LUT data calculating unit 815 calculates LUT data based on color chart photographic signals obtained by photographing the color chart 804 by the digital
15 camera 801, an observation illumination light spectrum, color matching functions, a subject spectral reflectance database, color chart spectral reflectance data, and a monitor profile that have been input from the characteristic data memory unit 816. The LUT data
20 calculating unit 815 outputs the calculated LUT data to the LUT data memory unit 812.

 FIG. 33 shows a structure of the LUT data calculating unit 815. The LUT data calculating unit 815 consists of a database photographic signal
25 calculating unit 861, a database photographic signal memory unit 862, a sample data calculating unit 863, and color conversion LUT calculating unit 864.

The database photographic signal calculating unit 861 estimates photographic signals of each spectral reflectance of the subject spectral reflectance database, based on the color chart photographic signals input from the digital camera 801 shown in FIG. 32 and the color chart spectral reflectance data input from the characteristic data memory unit 816. Within the database photographic signal calculating unit 861, average signal value data (R_{ci} , G_{ci} , B_{ci}) ($i = 1$ to 16) of signals corresponding to 16 patches of the color chart 804 are first obtained from the color chart photographic signals input from the digital camera 801. A photographic signal ($R_i G_i B_i$) of a spectral reflectance $f_i(\lambda)$ in the subject spectral reflectance database is obtained from the following expression.

$$\begin{pmatrix} R_i \\ G_i \\ B_i \end{pmatrix} = \begin{pmatrix} R_{c1} & R_{c2} & \dots & R_{c16} \\ G_{c1} & G_{c2} & \dots & G_{c16} \\ B_{c1} & B_{c2} & \dots & B_{c16} \end{pmatrix} \begin{pmatrix} c_{i1} \\ c_{i2} \\ \vdots \\ c_{i16} \end{pmatrix}$$

In the above expression, c_{ij} is an expansion coefficient obtained by expanding an i -th spectral reflectance $f_i(\lambda)$ of the subject spectral reflectance database based on a spectral reflectance $p_j(\lambda)$ ($j = 1$ to 16) of each of the 16 patches of the color chart 804 as given by the following expression.

$$f_i(\lambda) = \sum_{j=1}^{16} c_{ij} p_j(\lambda)$$

The photographic signals calculated by the

database photographic signal calculating unit 861 are stored in the database photographic signal memory unit 862. The database photographic signal memory unit 862 and the sample data calculating unit 863 are similar to those explained in the tenth embodiment, and therefore, their explanation will be omitted here.

FIG. 34 shows a structure of the color conversion LUT calculating unit 864. The color conversion LUT calculating unit 864 consists of a basis function calculating unit 871, a tristimulus value calculating unit 872, a monitor input signal calculating unit 873, and a data interpolating unit 874. Registration numbers i of ten photographic signal data selected by the sample data calculating unit 863 shown in FIG. 33 are input to the basis function calculating unit 871.

The basis function calculating unit 871 receives an input of the subject spectral reflectance data of the registration numbers i as subject spectral reflectance sample data, from the characteristic data memory unit 816 shown in FIG. 32. The basis function calculating unit 871 then obtains basis functions $\rho_k(\lambda)$ ($k = 1$ to 3) of the input data as statistical data of the spectral reflectances of the subject. The basis functions $\rho_k(\lambda)$ ($k = 1$ to 3) are obtained as eigen vectors of a correlation matrix of the spectral reflectances.

The tristimulus value calculating unit 872

calculates XYZ tristimulus values of the subject under the observation illumination light as follows, based on the data of a sample signal RSGsBs input from the sample data calculating unit 863 shown in FIG. 33,

5 color chart photographic signals $R(j)$, $G(j)$ and $B(j)$ ($j = 1$ to 16) input from the digital camera 801 shown in FIG. 32, the basis functions $\rho_k(\lambda)$ ($k = 1$ to 3) input from the basis function calculating unit 871, an observation illumination light spectrum $E_o(\lambda)$, color

10 matching functions $x(\lambda)$, $y(\lambda)$ and $z(\lambda)$, and color chart spectral reflectances $p_j(\lambda)$ ($j = 1$ to 16) that have been input from the characteristic data memory unit 816 shown in FIG. 32. The tristimulus value calculating unit 872 then outputs the calculated XYZ

15 tristimulus values of the subject to the monitor input signal calculating unit 873.

In other words, the tristimulus value calculating unit 872 calculates the spectral reflectances $f(\lambda)$ of the subject, and obtains the tristimulus values XYZ

20 under the observation illumination light based on this calculation, from the following expression.

$$X = \int_{\lambda=380}^{780} x(\lambda) E_O(\lambda) f(\lambda) d\lambda$$

$$Y = \int_{\lambda=380}^{780} y(\lambda) E_O(\lambda) f(\lambda) d\lambda$$

$$Z = \int_{\lambda=380}^{780} z(\lambda) E_O(\lambda) f(\lambda) d\lambda$$

The spectral reflectances $f(\lambda)$ of the subject are obtained from the following expression.

$$F = B(QD)^{-1}G$$

where

$$F = (f(380), f(381), \dots, f(780))^t$$

$$B = \begin{pmatrix} \rho_1(380) & \rho_2(380) & \rho_3(380) \\ \rho_1(381) & \rho_2(381) & \rho_3(381) \\ \vdots & \vdots & \vdots \\ \rho_1(780) & \rho_2(780) & \rho_3(780) \end{pmatrix}$$

$$Q = \begin{pmatrix} R(1) & R(2) & \dots & R(16) \\ G(1) & G(2) & \dots & G(16) \\ B(1) & B(2) & \dots & B(16) \end{pmatrix}$$

$$D = \begin{pmatrix} d_1^{(1)} & d_2^{(1)} & d_3^{(1)} \\ d_1^{(2)} & d_2^{(2)} & d_3^{(2)} \\ \vdots & \vdots & \vdots \\ d_1^{(16)} & d_2^{(16)} & d_3^{(16)} \end{pmatrix}$$

$$G = (R_S, G_S, B_S)^t$$

In the above expression, elements $d_k(j)$ ($k = 1$ to 3, $j = 1$ to 16) of D are expansion functions obtained by expanding the basis functions based on the spectral reflectances of the patches of the color chart 804.

$$\rho_k(\lambda) = \sum_{j=1}^{16} d_k^{(j)} p_j(\lambda) \quad (k = 1 \text{ to } 3)$$

The tristimulus values XYZ calculated by the tristimulus value calculating unit 872 are output to the monitor input signal calculating unit 873. The
5 monitor input signal calculating unit 873 and the data interpolating unit 874 are similar to those explained in the tenth embodiment, and therefore, their explanation will be omitted here.

According to the color reproduction system having
10 the above-described structure of the present embodiment, the color correcting section 802' estimates tristimulus color values of subjects under the observation illumination light, based on the spectral sensitivity and the color matching functions of the digital camera
15 801, the spectrum of the observation illumination light, and the statistical data of the spectral reflectances of the subjects (the basis functions $\rho_k(\lambda)$ ($k = 1$ to 3) in the present example). Colors are estimated by changing over the basis functions $\rho_k(\lambda)$ ($k = 1$ to 3)
20 as the statistical data according to photographic signals of the subjects. In other words, the basis functions $\rho_k(\lambda)$ ($k = 1$ to 3) are calculated based on the spectral reflectances of the subjects that give signal values close to the subject photographic signals.
25 With this arrangement, it becomes possible to carry out color estimation in high precision.

(Other Embodiments)

The present invention is not limited to the tenth and eleventh embodiments. It is also possible to implement the invention through various modifications
5 as follows.

(1) In the tenth and eleventh embodiments, the digital camera 801 of RGB three channels has been used as the color photographing section. However, the camera is not limited to this. It is also possible to
10 use a digital camera of four or more channels.

(2) In the tenth and eleventh embodiments, the CRT monitor 803 has been used as the color image output section. However, it is also possible to use other display unit such as a projector, or to use a hardcopy
15 output unit like a printer, instead of the CRT monitor.

(3) In the tenth embodiment, the statistical data of the spectral reflectances of the subjects are calculated based on the spectral sensitivity of the camera and the photographic illumination light spectrum
20 at the time of the photographing. However, it is also possible to calculate in advance the correlation matrix data of spectral sensitivity of a predetermined camera and photographic illumination light spectrum, and to use this calculated data.

(4) In the eleventh embodiment, for photographing the subject and the color chart 804, it is possible to photograph the subject and the color chart separately
25

when the photographing conditions are the same.
Alternatively, it is also possible to photograph the
subject and the color chart in one picture at the same
time, and to separately take out the subject
5 photographic signals and the color chart photographic
signals after the photographing.

(5) In the eleventh embodiment, the number of
patches included in the color chart 804 is optional.
However, it is desirable that all the spectral
10 reflectance data in the subject spectral reflectance
database can be expanded in high precision based on the
spectral reflectances of the patches included in the
color chart 804.

As explained above, according to the color
15 reproduction system of the tenth and eleventh
embodiments, there is used statistical data of the
spectral reflectances of subjects as foresight
information based on the subject photographic signals
obtained by photographing the subjects by the color
20 photographing unit or the subject photographic signals
and the object photographic signals obtained by
photographing a plurality of objects of known spectral
reflectances by using the color photographic unit. In
estimating colors of the subjects under a predetermined
25 illumination light, the statistical data is used by
changing over the data according to the subject
photographic signals. With this arrangement, it is

possible to estimate colors of the subjects in high precision based on a simple system structure using a color photographing unit of a limited number of bands. As a result, it is possible to achieve an accurate color reproduction.

5

Additional advantages and modifications will readily occur to those skilled in the art. Therefore, the invention in its broader aspects is not limited to the specific details and representative embodiments shown and described herein. Accordingly, various modifications may be made without departing from the spirit or scope of the general inventive concept as defined by the appended claims and their equivalents.

10

WHAT IS CLAIMED IS:

1. A color reproduction system comprising:
 - a color image input section; and
 - a color correcting section for correcting colorsof an image of a subject obtained by photographing the
subject by the color image input section, wherein
the color correcting section corrects colors by
changing over a plurality of color correction
parameters according to a subject image signal from the
color image input section.
2. A color reproduction system according to
claim 1, wherein
the color correcting section comprises:
 - an object recognizing section for dividing a
subject image input from the color image input section
into images of a plurality of areas, and selecting a
suitable input profile from among a plurality of input
profiles for each divided area;
 - a device-independent color converting section for
converting an image of each area into a device-
independent color image by using the input profile
selected from among the plurality of input profiles;
 - an image combining section for combining the
device-independent color images converted at divided
areas into one device-independent color image; and
 - a device value image converting section for
converting the combined device-independent color image

into an output device value image by using a predetermined output profile.

3. A color reproduction system according to claim 1, wherein the color correcting section has a plurality of input/output profiles prepared by integrating input profiles and output profiles together, and comprises:

an object recognizing section for dividing an input subject image into images of a plurality of areas, and selecting a suitable input/output profile from among the plurality of input/output profiles for each divided area;

a device value image converting section for converting an image of each area into a device value image by using the input/output profile selected from among the plurality of input/output profiles; and

an image combining section for combining the device value images converted at divided areas into one device value image.

4. A color reproduction system according to claim 1, further comprising:

an object recognizing section for dividing a subject image data including information necessary for preparing a plurality of input profiles into images of a plurality of areas, and selecting suitable subject characteristic information from among a plurality of pieces of subject characteristic information for each

divided area;

a format converting section for converting a
format based on selected subject characteristic
information and outputting image data capable of
5 changing illumination by areas;

a device-independent color converting section for
calculating an input profile from the illumination-
variable image data, selecting a suitable input profile
from among the plurality of input profiles based on the
10 calculated input profile, and converting the image in
each area into a device-independent color image by
using the selected input profile;

an image combining section for combining the
device-independent color images converted at divided
15 areas into one device-independent color image; and

a device value image converting section for
converting the combined device-independent color image
into an output device value image by using a
predetermined output profile.

20 5. A color reproduction system according to
claim 1, further comprising:

an area dividing section for dividing an input
image into images of a plurality of areas;

a device-independent color converting section for
25 converting the image in each divided area into a
device-independent color image by using the plurality
of input profiles in parallel;

a conversion result selecting section for selecting a device-independent color image for each area by comparing the plurality of converted device-independent color images;

5 an image combining section for converting the device-independent color images selected at divided areas into one device-independent color image; and

10 a device value image converting section for converting the combined device-independent color image into an output device value image by using a predetermined output profile.

6. A color reproduction system according to claim 1, further comprising:

15 an area dividing section for dividing an input image into images of a plurality of areas;

 a first device-independent color converting section for converting the image in each divided area into a device-independent color image by using one input profile;

20 a second device-independent color converting section for converting the input image in each divided area into a device-independent color image by using an input profile selected from among a plurality of input profiles for each area based on a result of the
25 conversion in the first device-independent color converting section;

 an image combining section for converting the

device-independent color images converted at divided areas into one device-independent color image; and

5 a device value image converting section for converting the combined device-independent color image into an output device value image by using a predetermined output profile.

7. A color reproduction system according to claim 1, further comprising:

10 an area dividing section for dividing an input image into images of a plurality of areas;

a first device-independent color converting section for converting the image in each divided area into a device-independent color image by using one input profile;

15 a spectral reflectance database for storing information on spectral reflectances of a plurality of objects;

20 a conversion result judging section for judging a result of the conversion at the first device-independent color converting section by referring to the spectral reflectance database;

25 a subject characteristic information calculating section for calculating subject characteristic information by selecting information in the spectral reflectance database based on a result of the decision by the conversion result judging section;

a second device-independent color converting

section for converting the input image in each divided area into a device-independent color image by using an input profile selected from among a plurality of input profiles prepared based on the subject characteristic information calculated by the subject characteristic information calculating section;

an image combining section for converting the device-independent color images converted at divided areas into one device-independent color image; and
a device value image converting section for converting the combined device-independent color image into an output device value image by using a predetermined output profile.

8. A color reproduction system according to claim 1, further comprising:

an object recognizing section for selecting an input profile to be used from among a plurality of input profiles based on signal values of images obtained by photographing a plurality of color charts of known spectral reflectances;

a device-independent color converting section for converting an image of each area into a device-independent color image by using the input profile selected from among the plurality of input profiles;

an image combining section for combining the device-independent color images converted at divided areas into one device-independent color image; and

a device value image converting section for converting the combined device-independent color image into an output device value image by using a predetermined output profile.

5 9. A color reproduction system according to claim 1, further comprising:

a spectral reflectance database having spectral reflectances of color charts;

10 a subject characteristic calculating section for calculating subject characteristic information from a color-chart photographic image based on signal values of images obtained by photographing a plurality of color charts of known spectral reflectances and data of the spectral reflectance database;

15 an object recognizing section for dividing a subject photographic image into images of a plurality of areas, and selecting an input profile to be used from among a plurality of input profiles based on the calculated subject characteristic information;

20 a device-independent color converting section for converting an image of each area into a device-independent color image by using the input profile selected from among the plurality of input profiles;

25 an image combining section for combining the device-independent color images converted at divided areas into one device-independent color image; and

a device value image converting section for

converting the combined device-independent color image into an output device value image by using a predetermined output profile.

10. A color reproduction system according to
5 claim 2, wherein the input profile is prepared based on at least one of image input unit information that includes photographic characteristics of an image input unit used for the photographing and information on a set state of the color image input section, observation
10 illumination light information, and subject characteristic information that represents statistical characteristics of spectral reflectances of the photographed subject.

11. A color reproduction system according to
15 claim 1, wherein
the color correcting section comprises a color estimating section for estimating tristimulus values of the subject under an observation illumination light, based on subject photographic signals obtained by
20 photographing the subject by the color image input section, spectral sensitivity of the color image input section, color matching functions, a spectrum of photographic illumination light, a spectrum of observation illumination light and statistical data of
25 spectral reflectances of the subject, and

the color estimating section uses the statistical data which is changed over according to the subject

photographic signals.

12. A color reproduction system according to claim 1, wherein

the color correcting section comprises a color
5 estimating section for estimating tristimulus values of
the subject under an observation illumination light,
based on object photographic signals obtained by
photographing a plurality of objects of known spectral
reflectances by the color image input section, subject
10 photographic signals obtained by photographing the
subject by the color image input section, color
matching functions, a spectrum of observation
illumination light and statistical data of spectral
reflectances of the subject, and

15 the color estimating section uses the statistical
data which is changed over according to the subject
photographic signals.

13. A color reproduction system according to
claim 11, wherein the color estimating section uses the
20 statistical data which is changed over based on a
relationship between spectral reflectance data for
calculating statistics of spectral reflectances and the
subject photographic signals.

14. A color reproduction system according to
25 claim 12, wherein the color estimating section uses the
statistical data which is changed over based on a
relationship between spectral reflectance data for

calculating statistics of spectral reflectances and the
subject photographic signals.

15. A color reproduction system according to
claim 12, wherein the color estimating section changes
5 over the statistical data based on a relationship
between spectral reflectance data for calculating
statistics of spectral reflectances of the subject
obtained from a relationship between the object
photographic signals and spectral reflectances of the
10 objects, and the subject photographic signals.

ABSTRACT OF THE DISCLOSURE

A color reproduction system has a color image
input section, and a color correcting section for
correcting colors of a subject image obtained by
5 photographing a subject by the color image input
section. The color correcting section corrects colors
by changing over a plurality of color correction
parameters according to a subject image signal from the
color image input section.

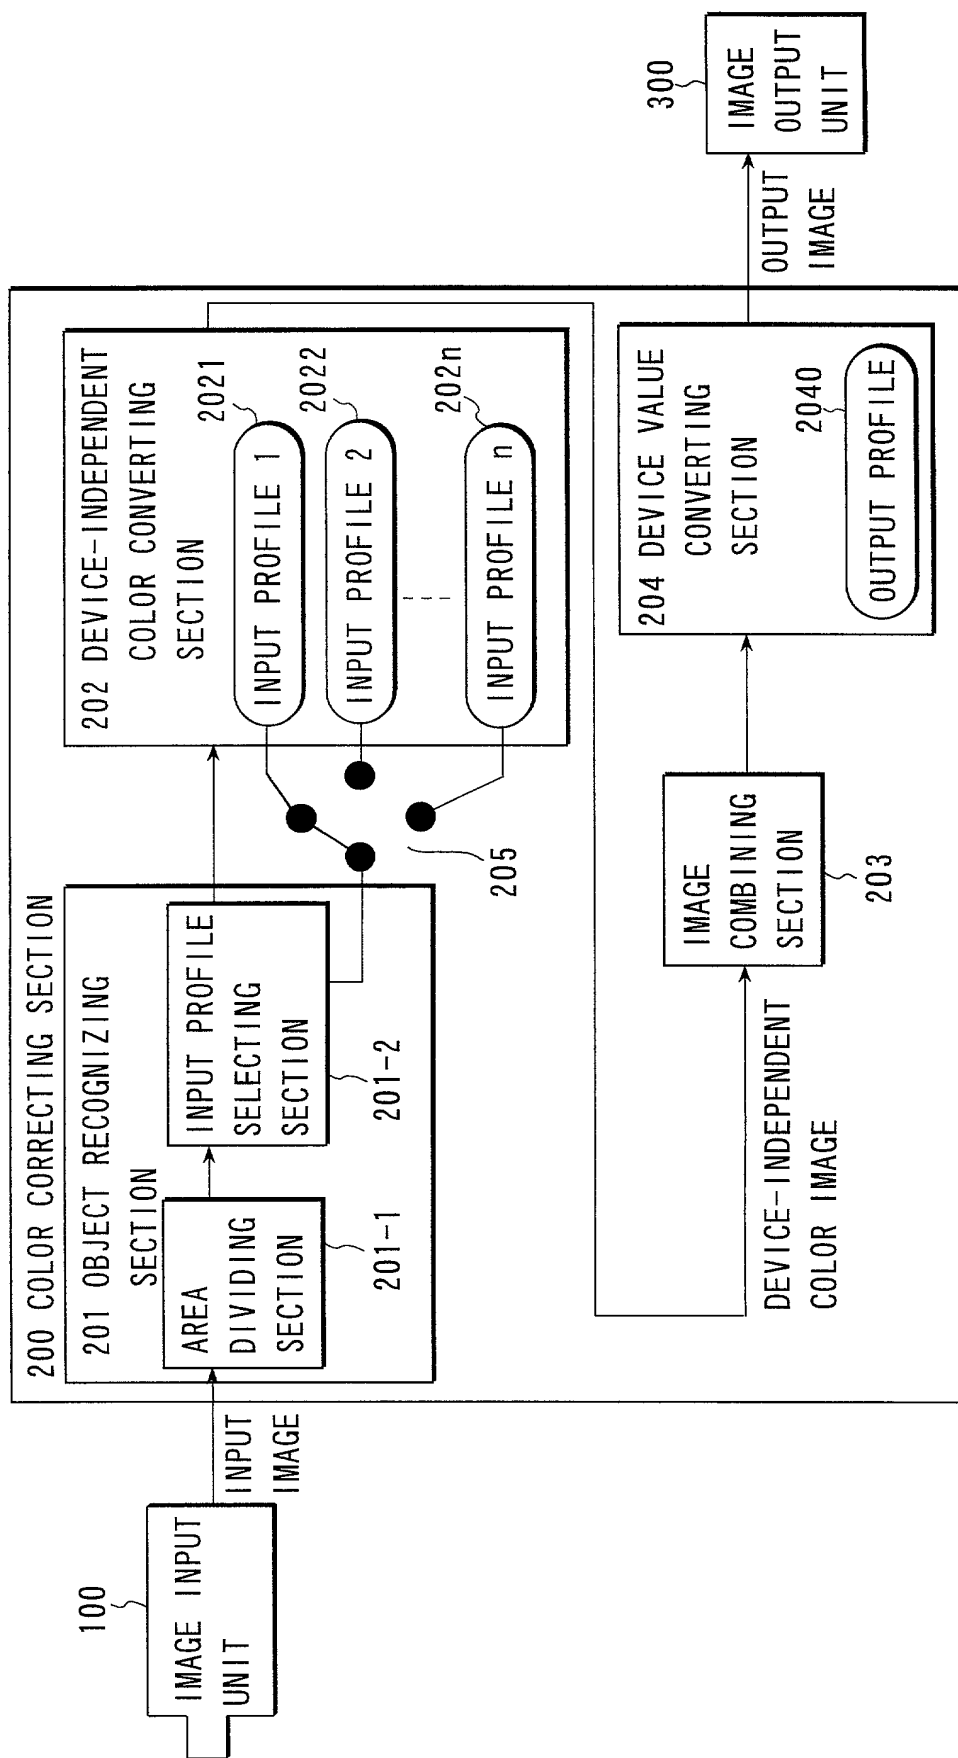


FIG. 1

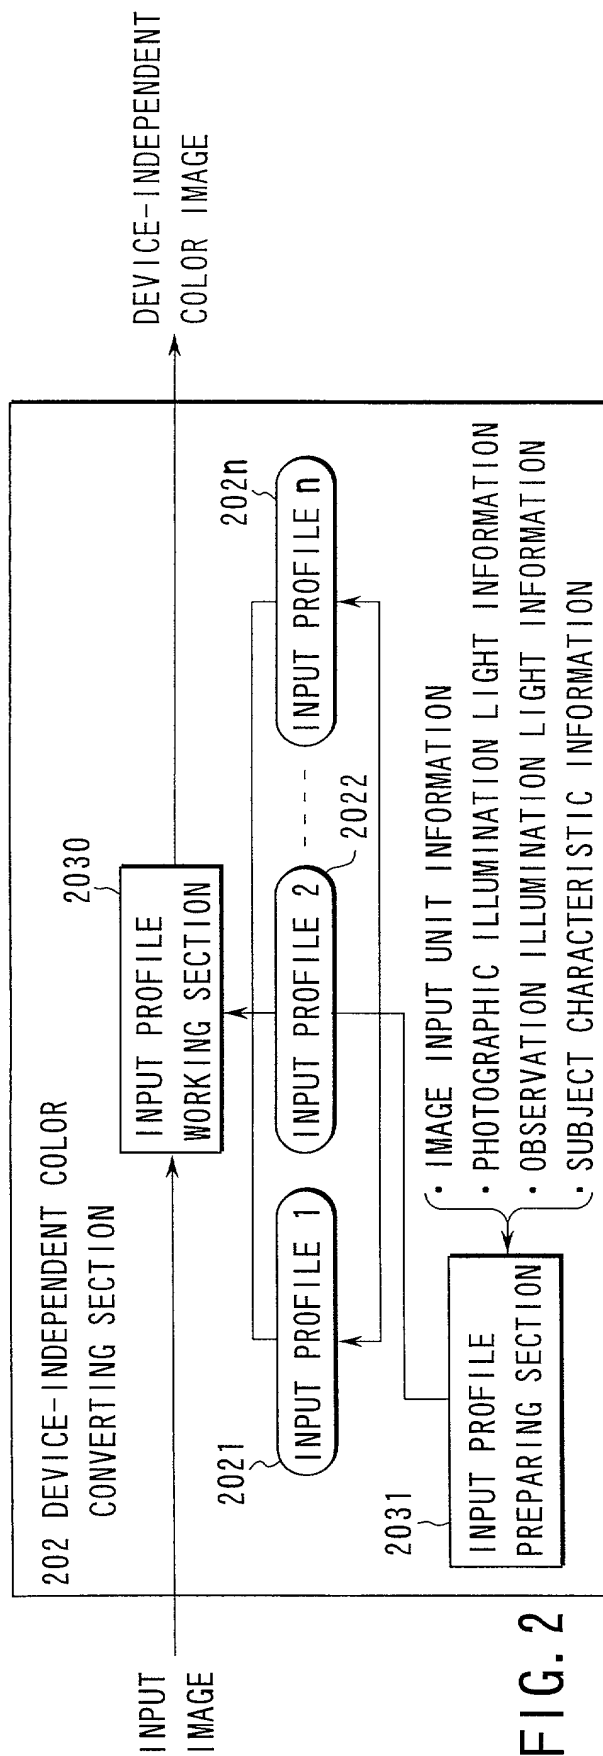


FIG. 2

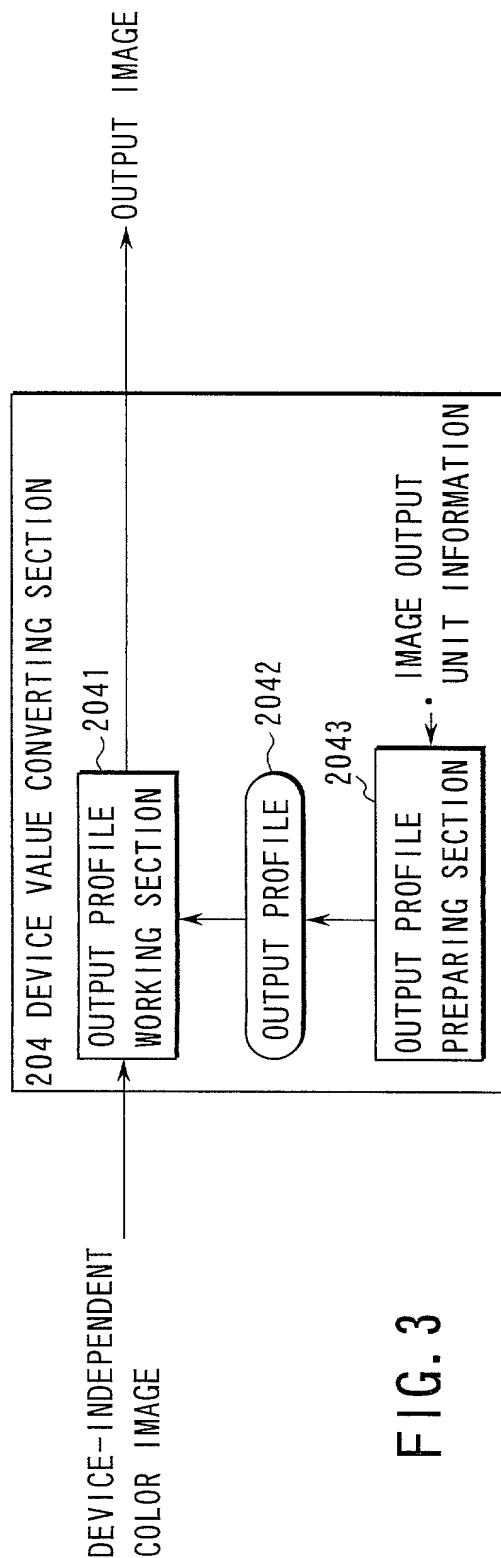


FIG. 3

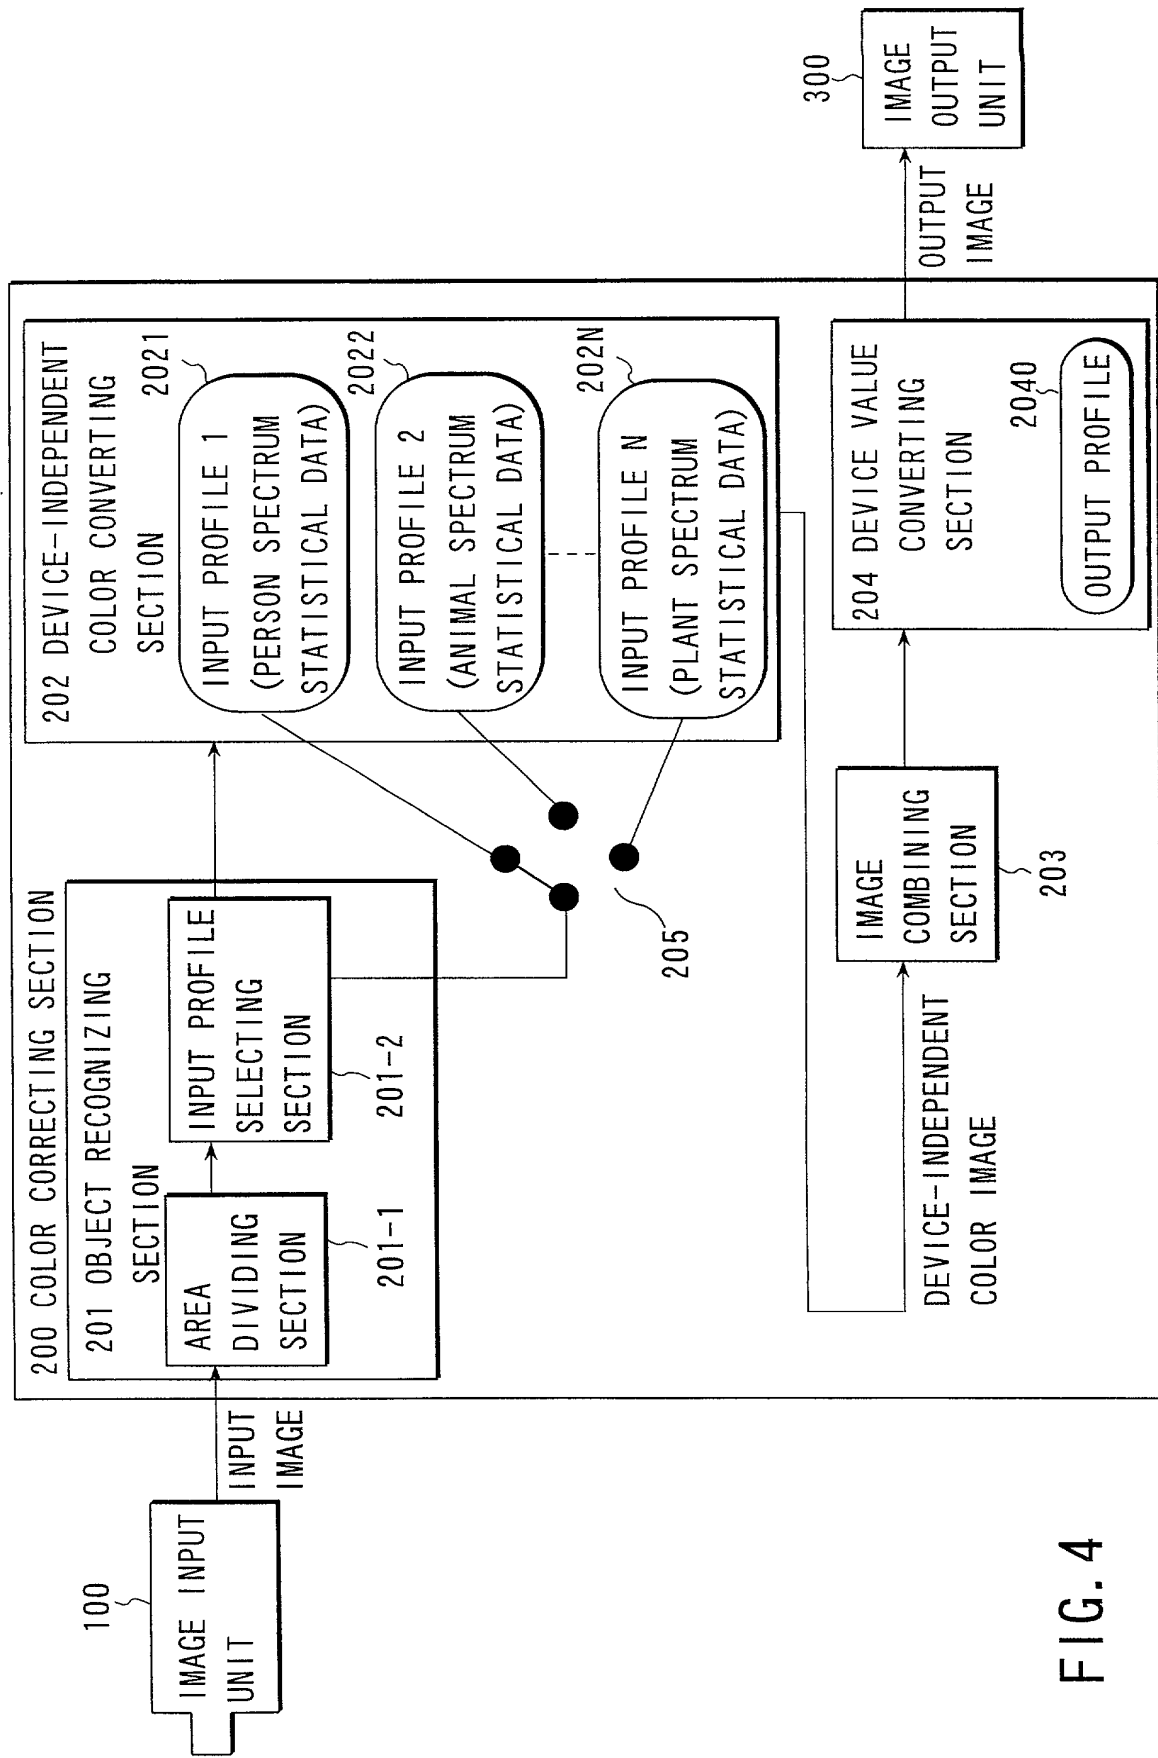


FIG. 4

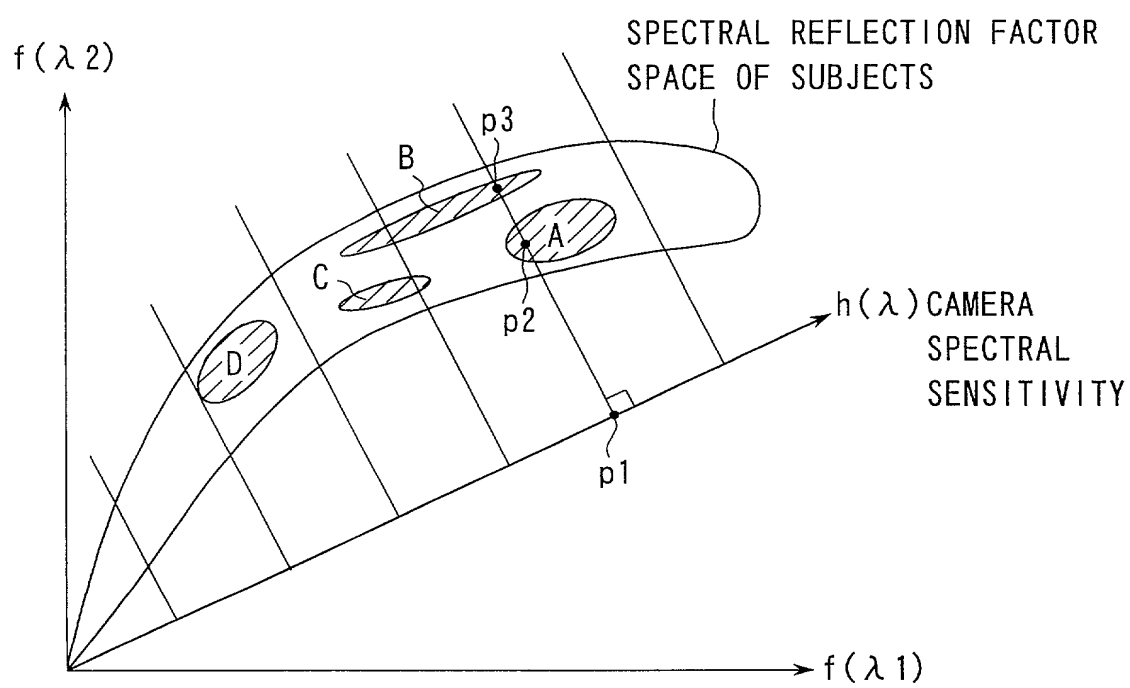


FIG. 5

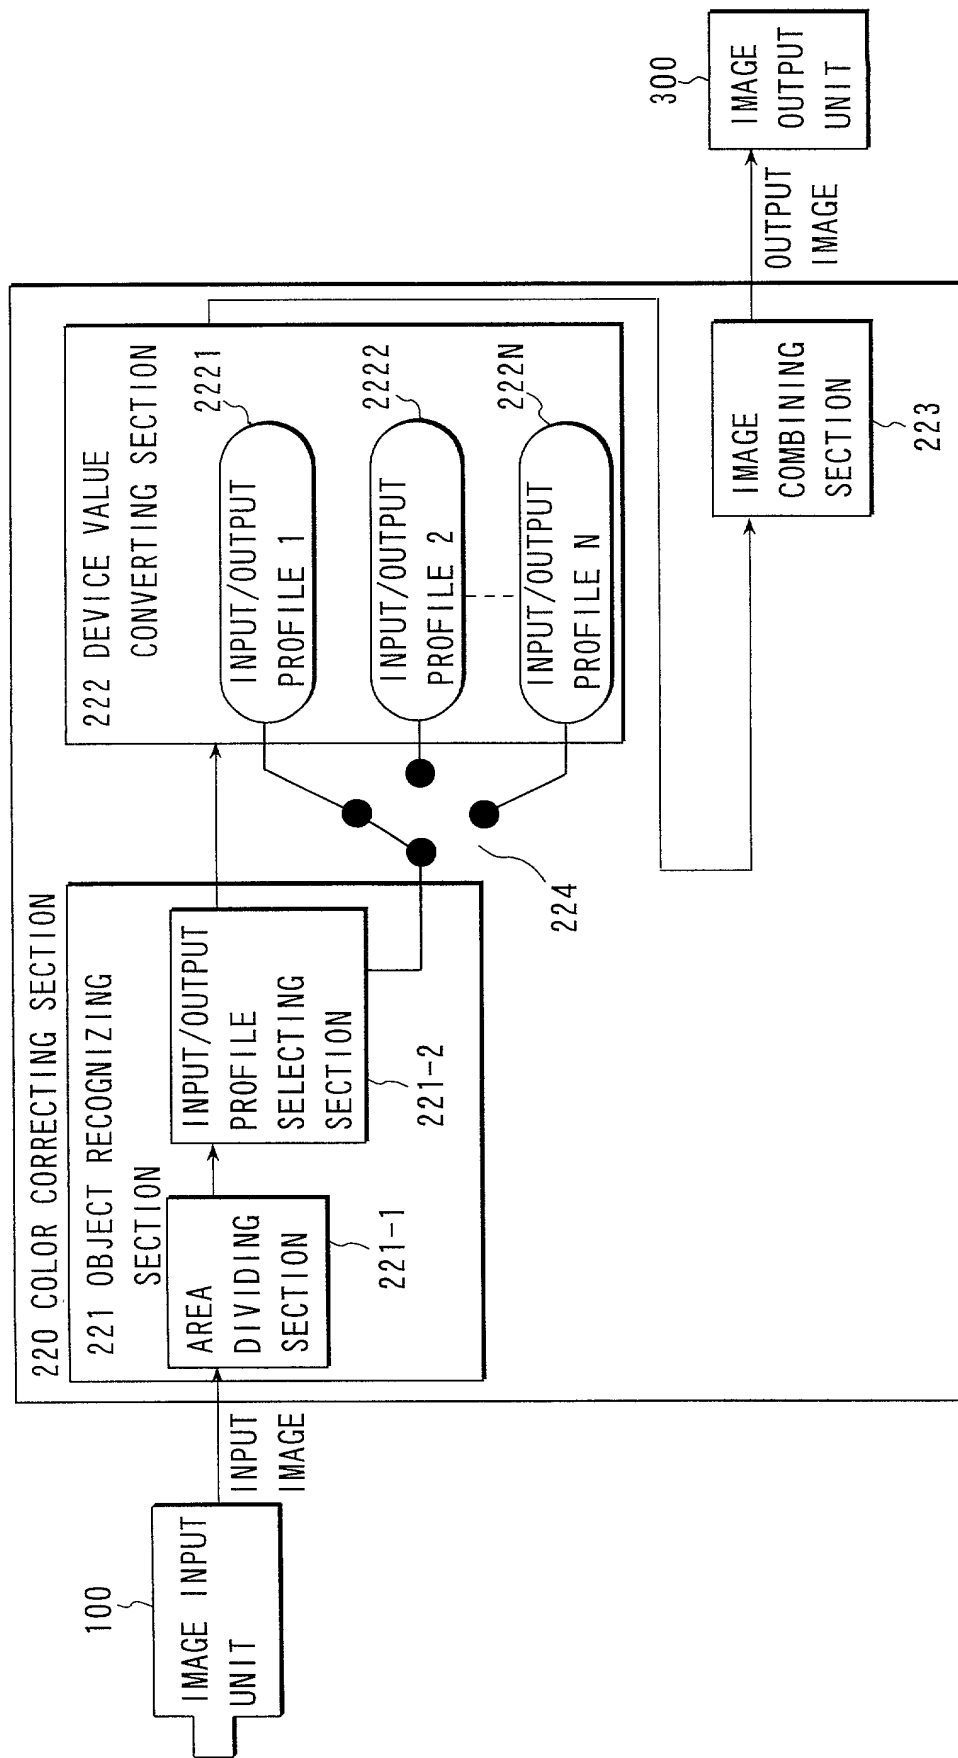


FIG. 6

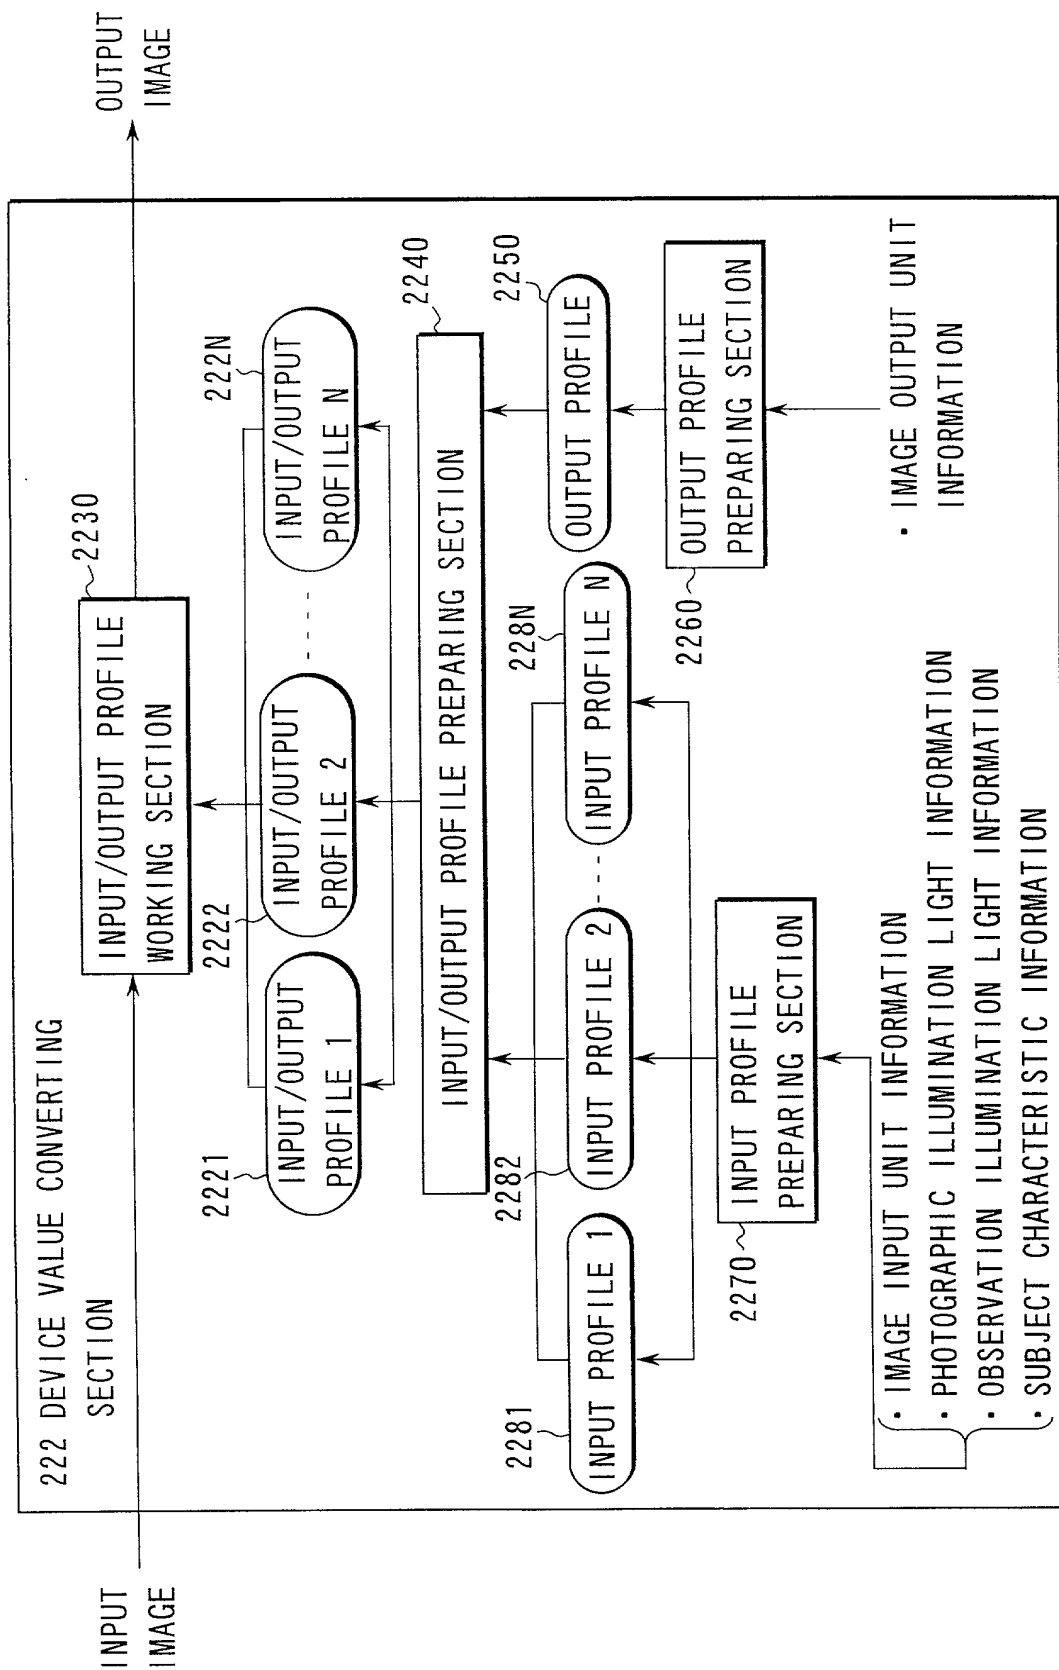


FIG. 7

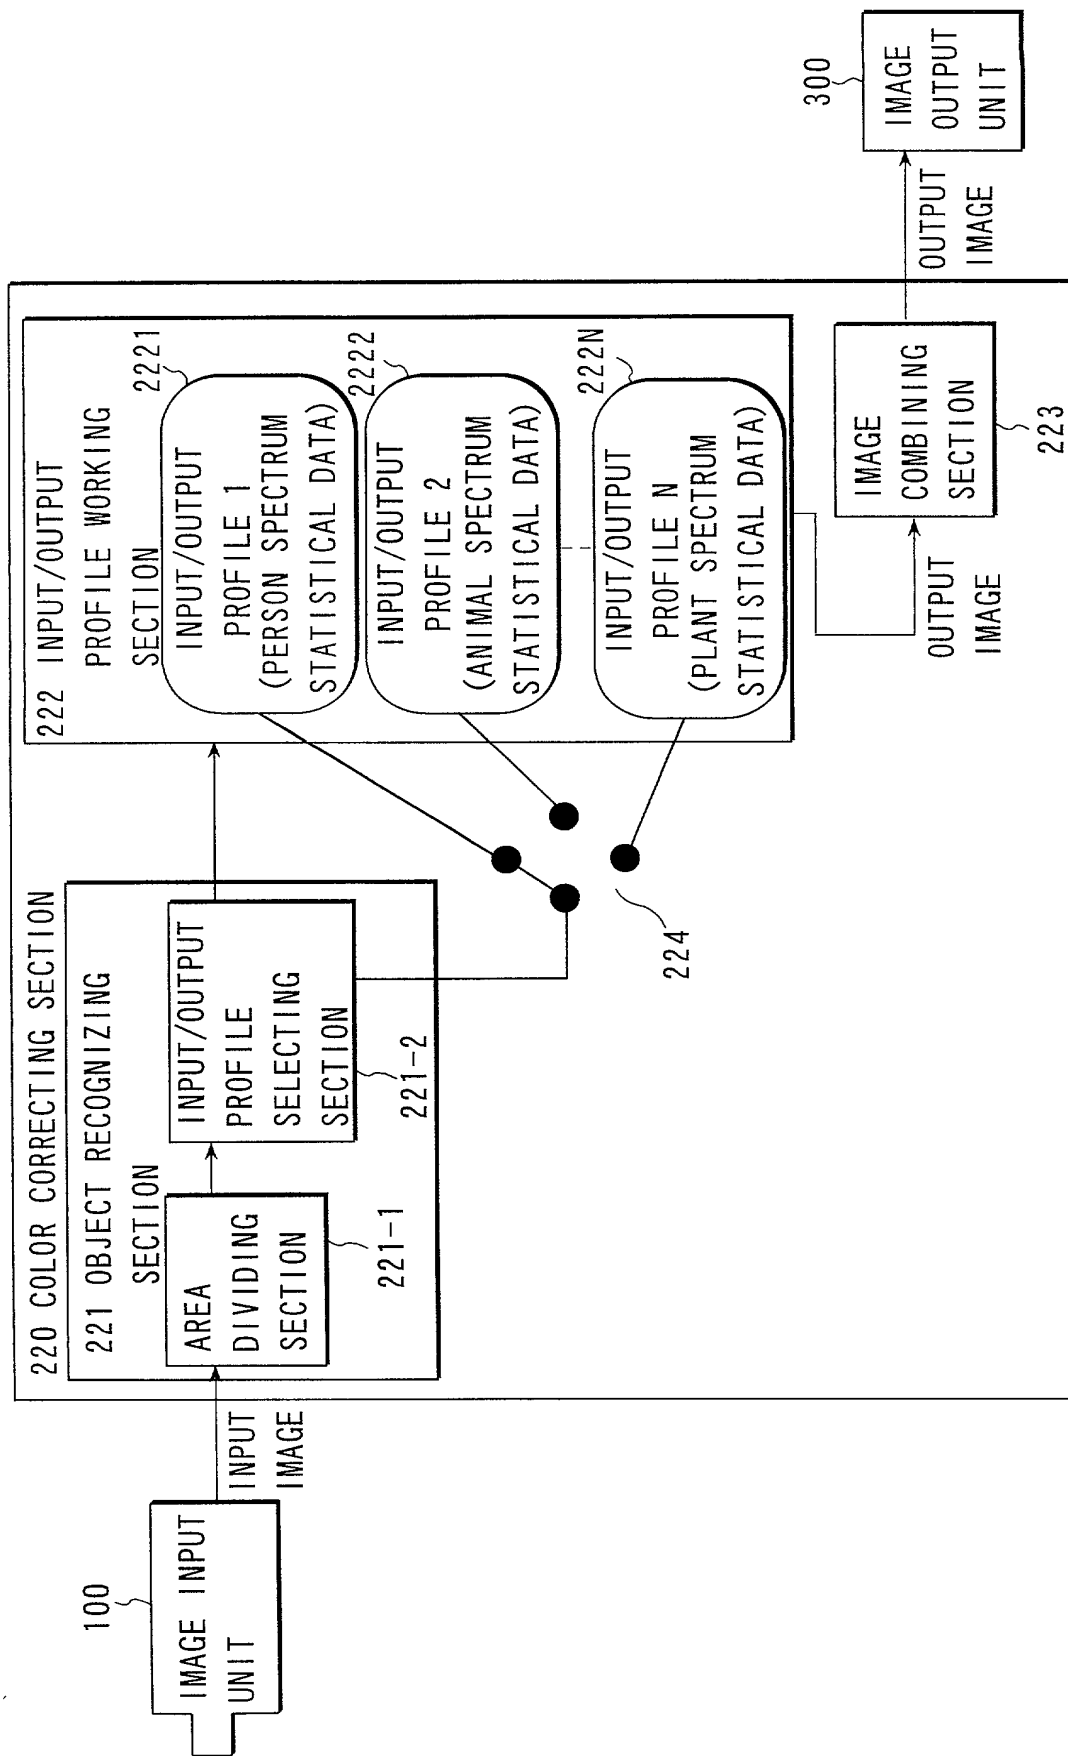


FIG. 8

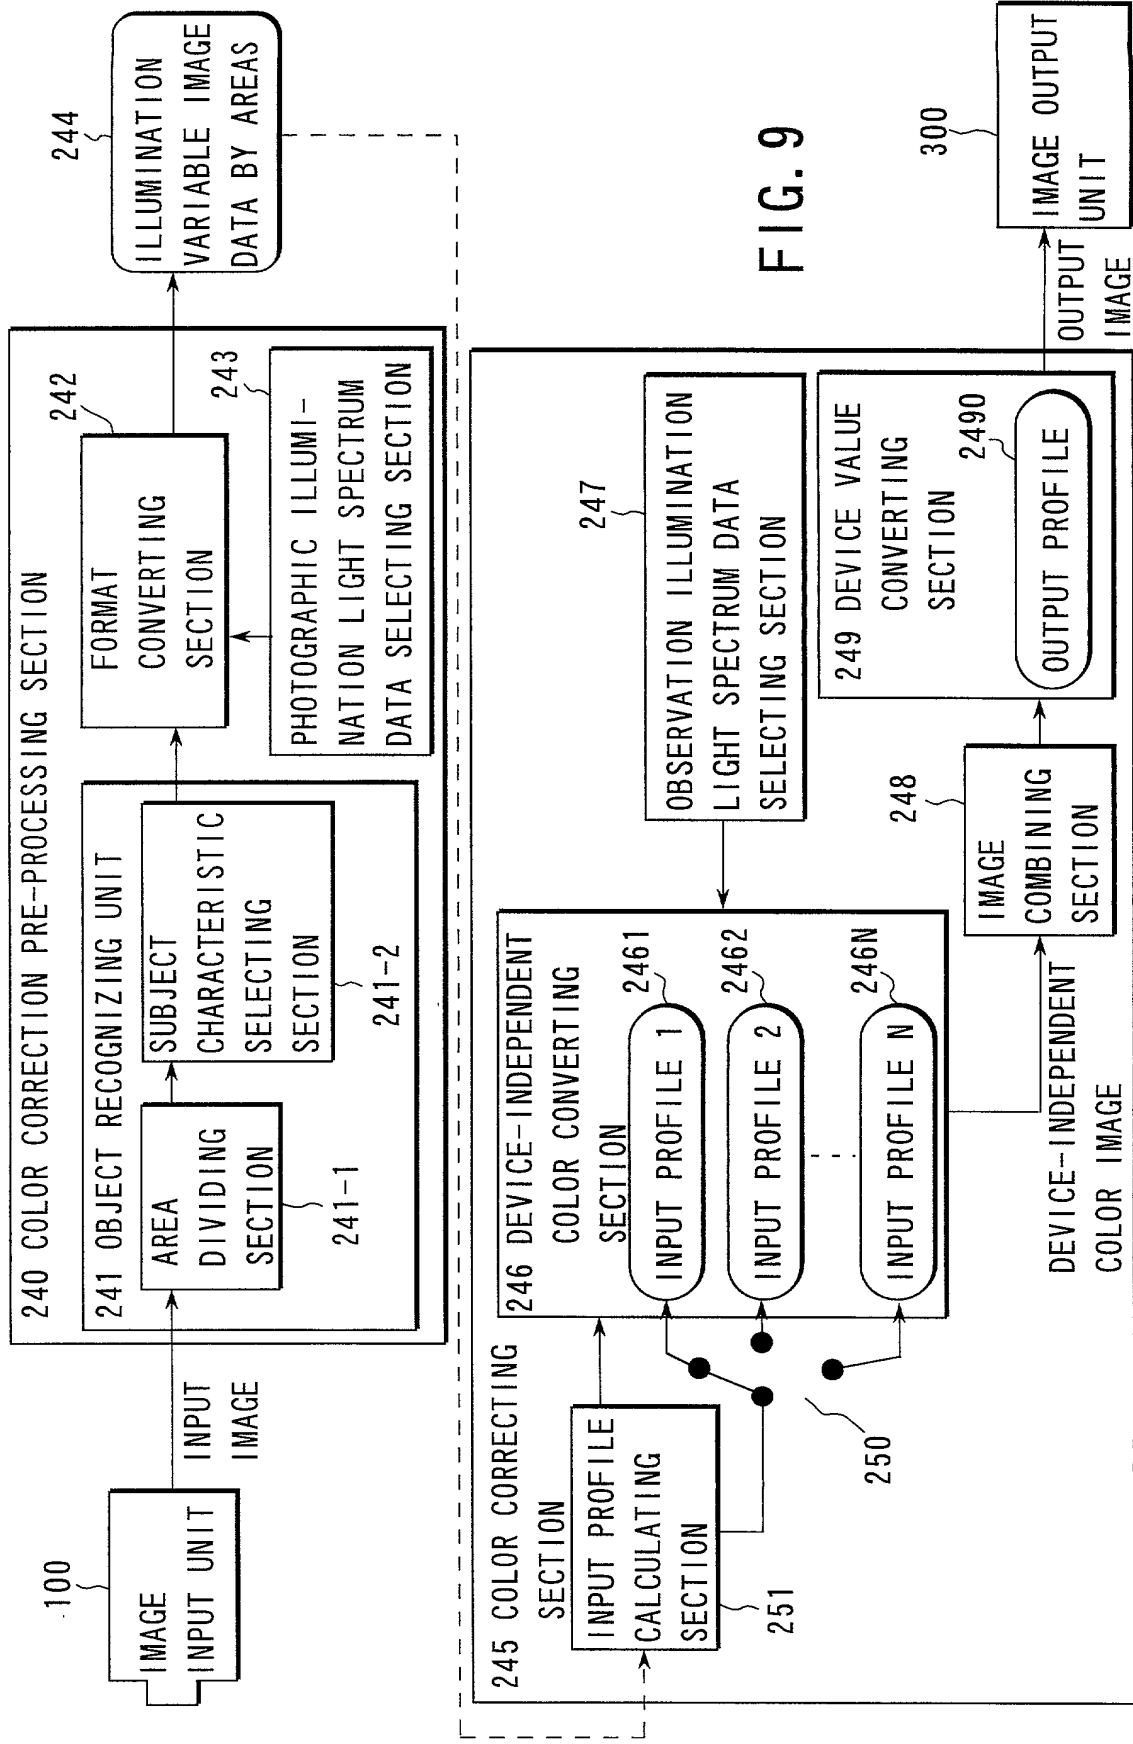


FIG. 9

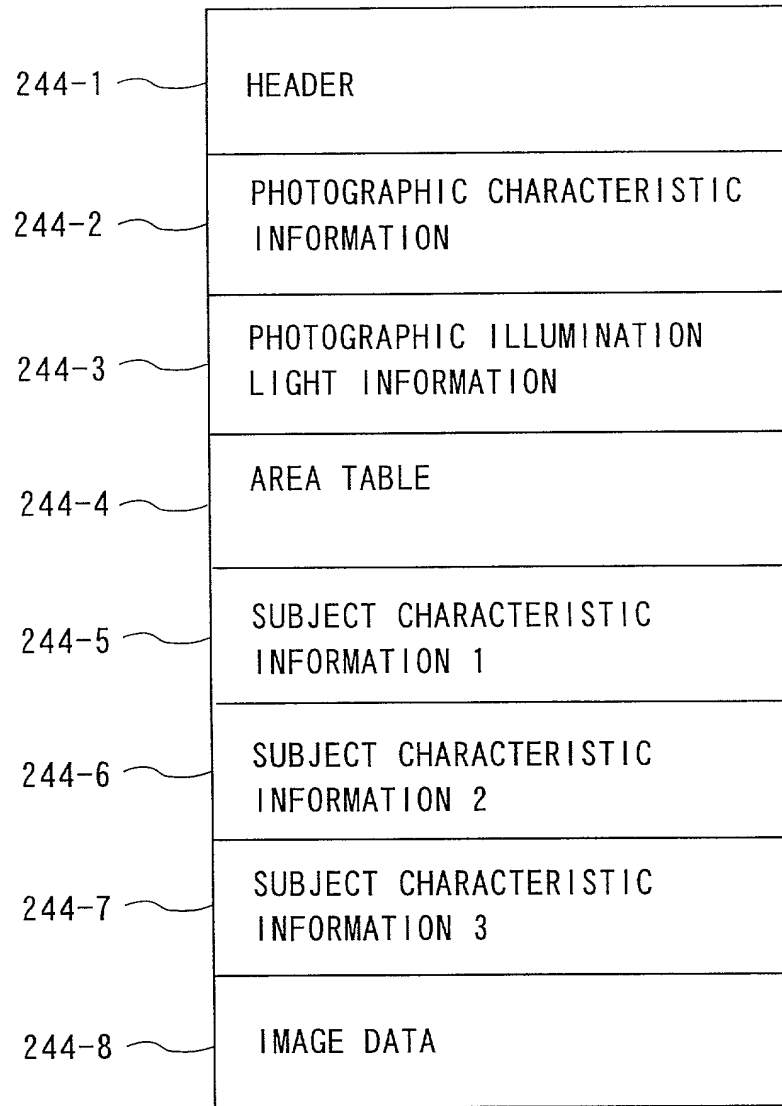


FIG. 10

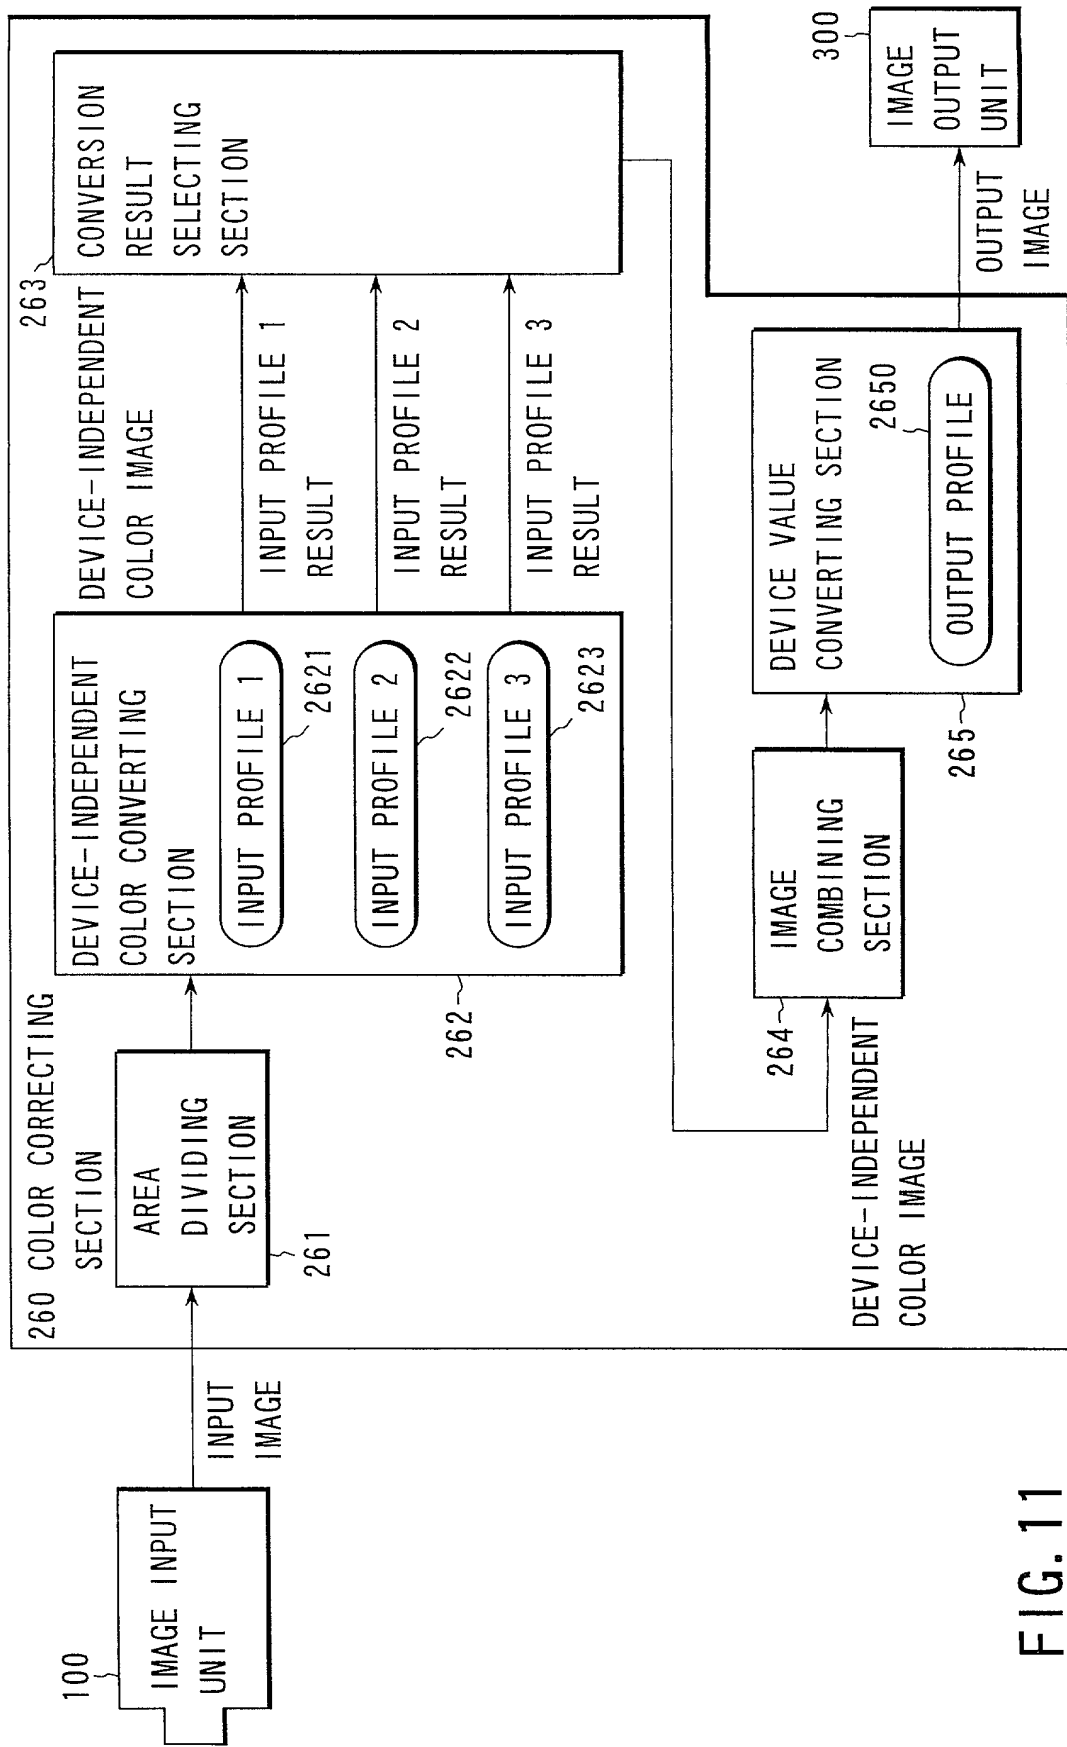


FIG. 11

1

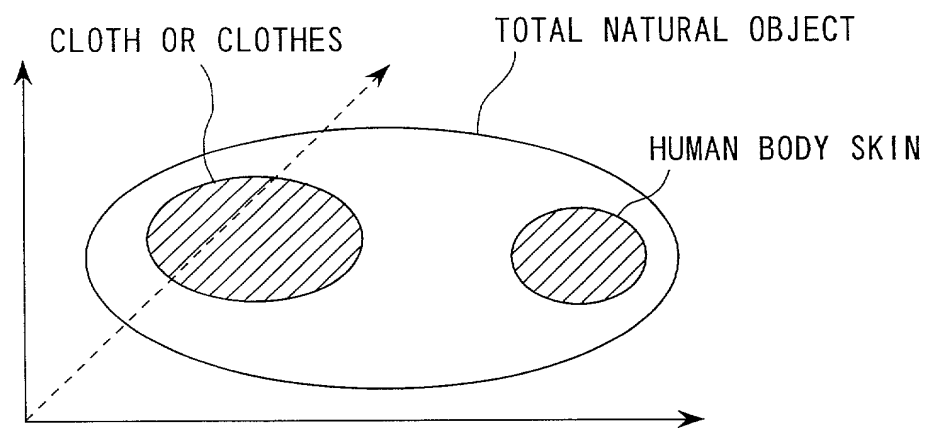


FIG. 12

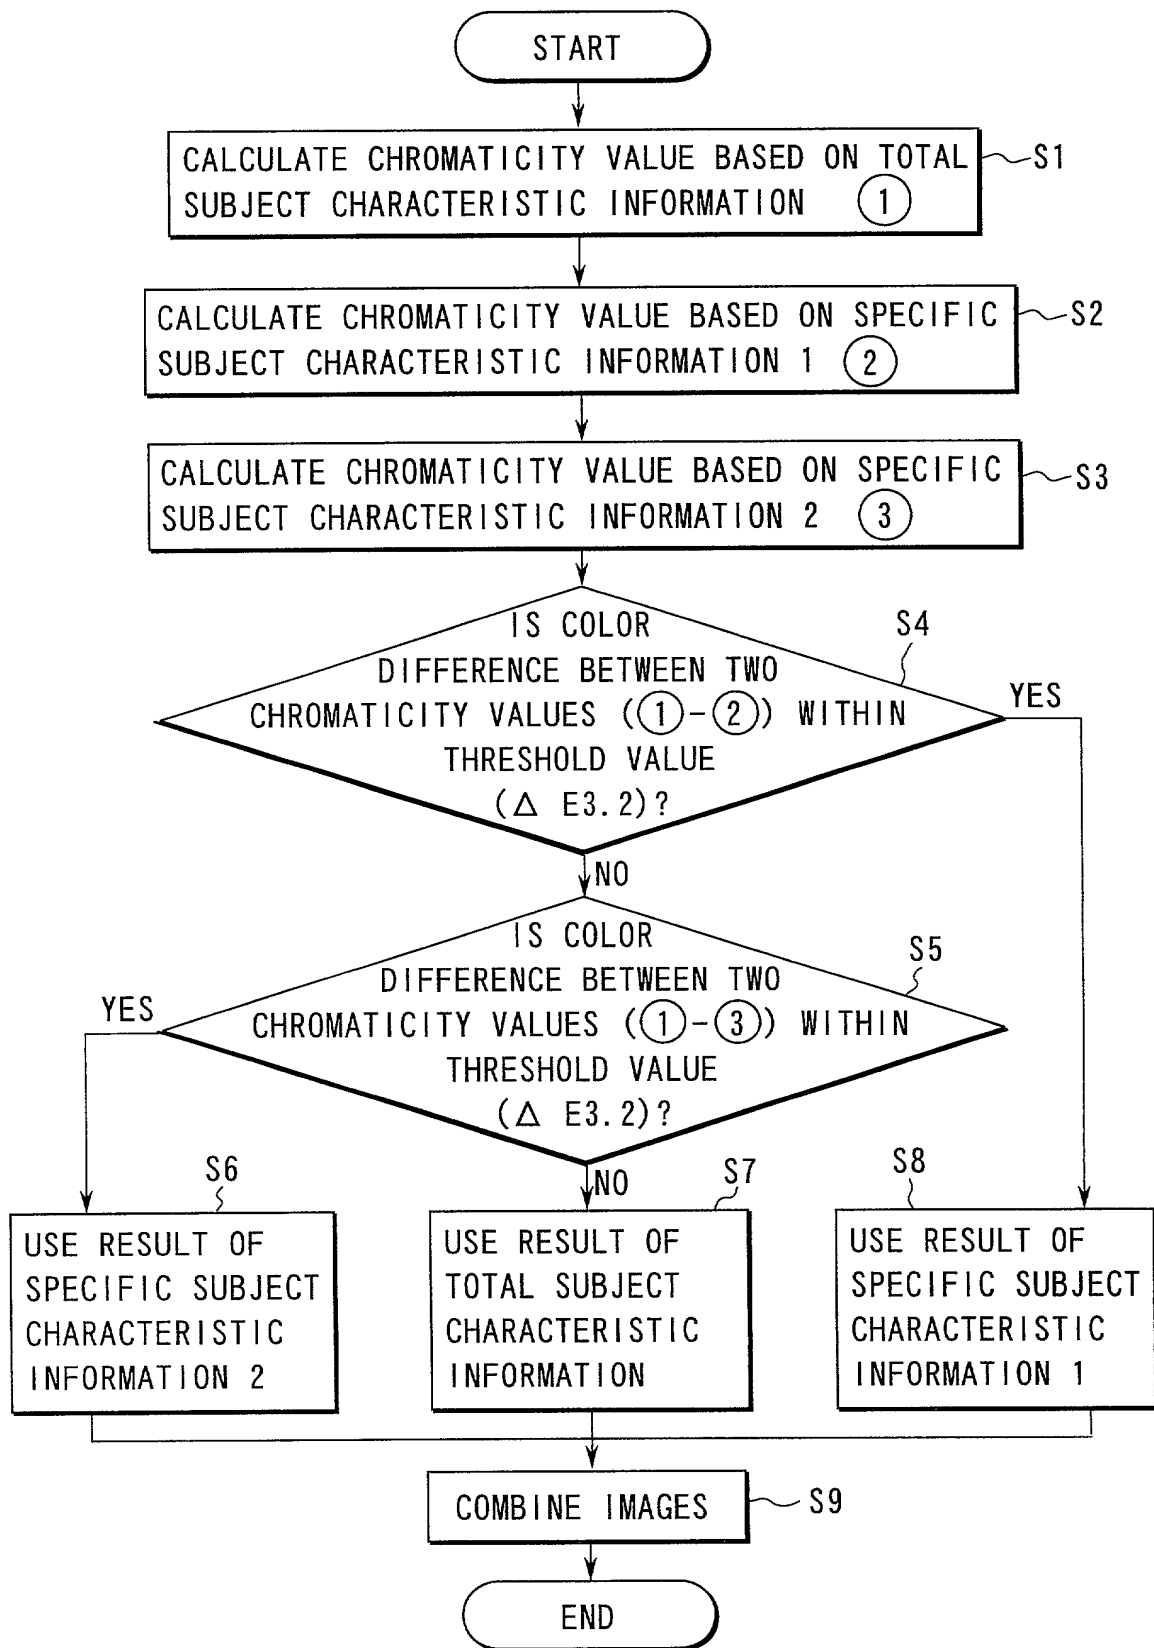


FIG. 13

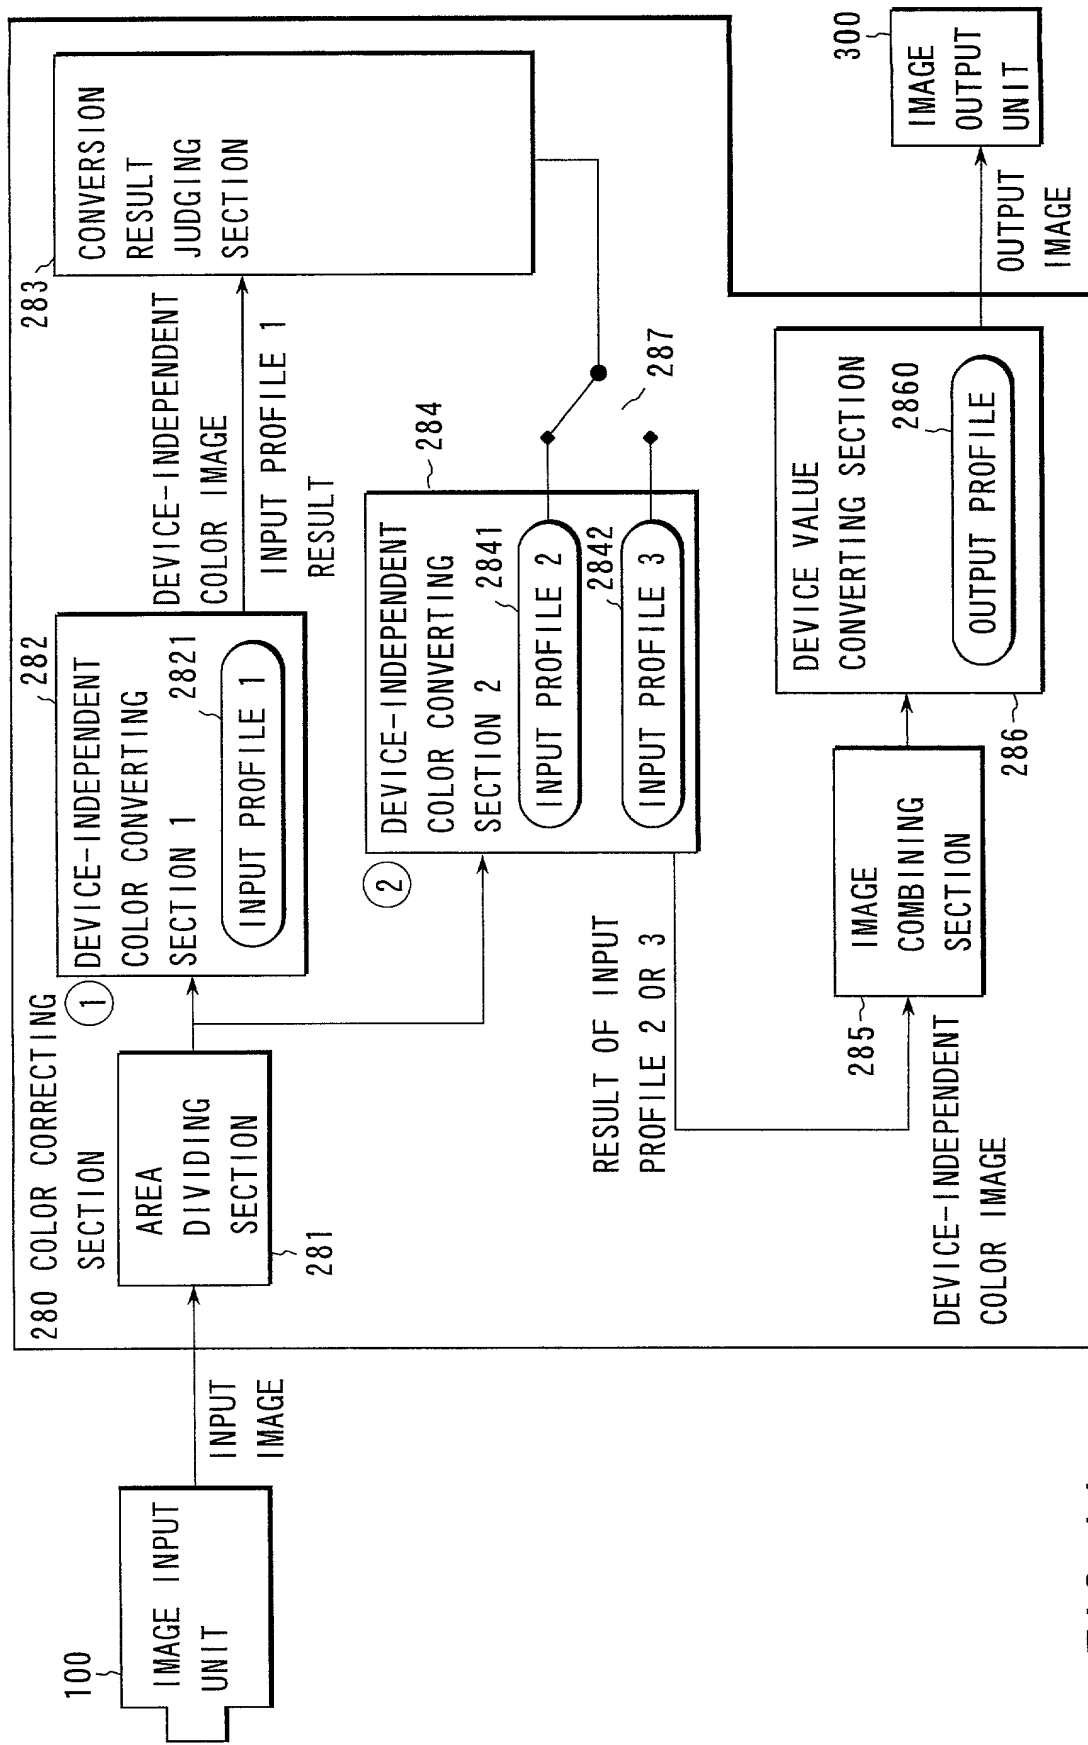


FIG. 14

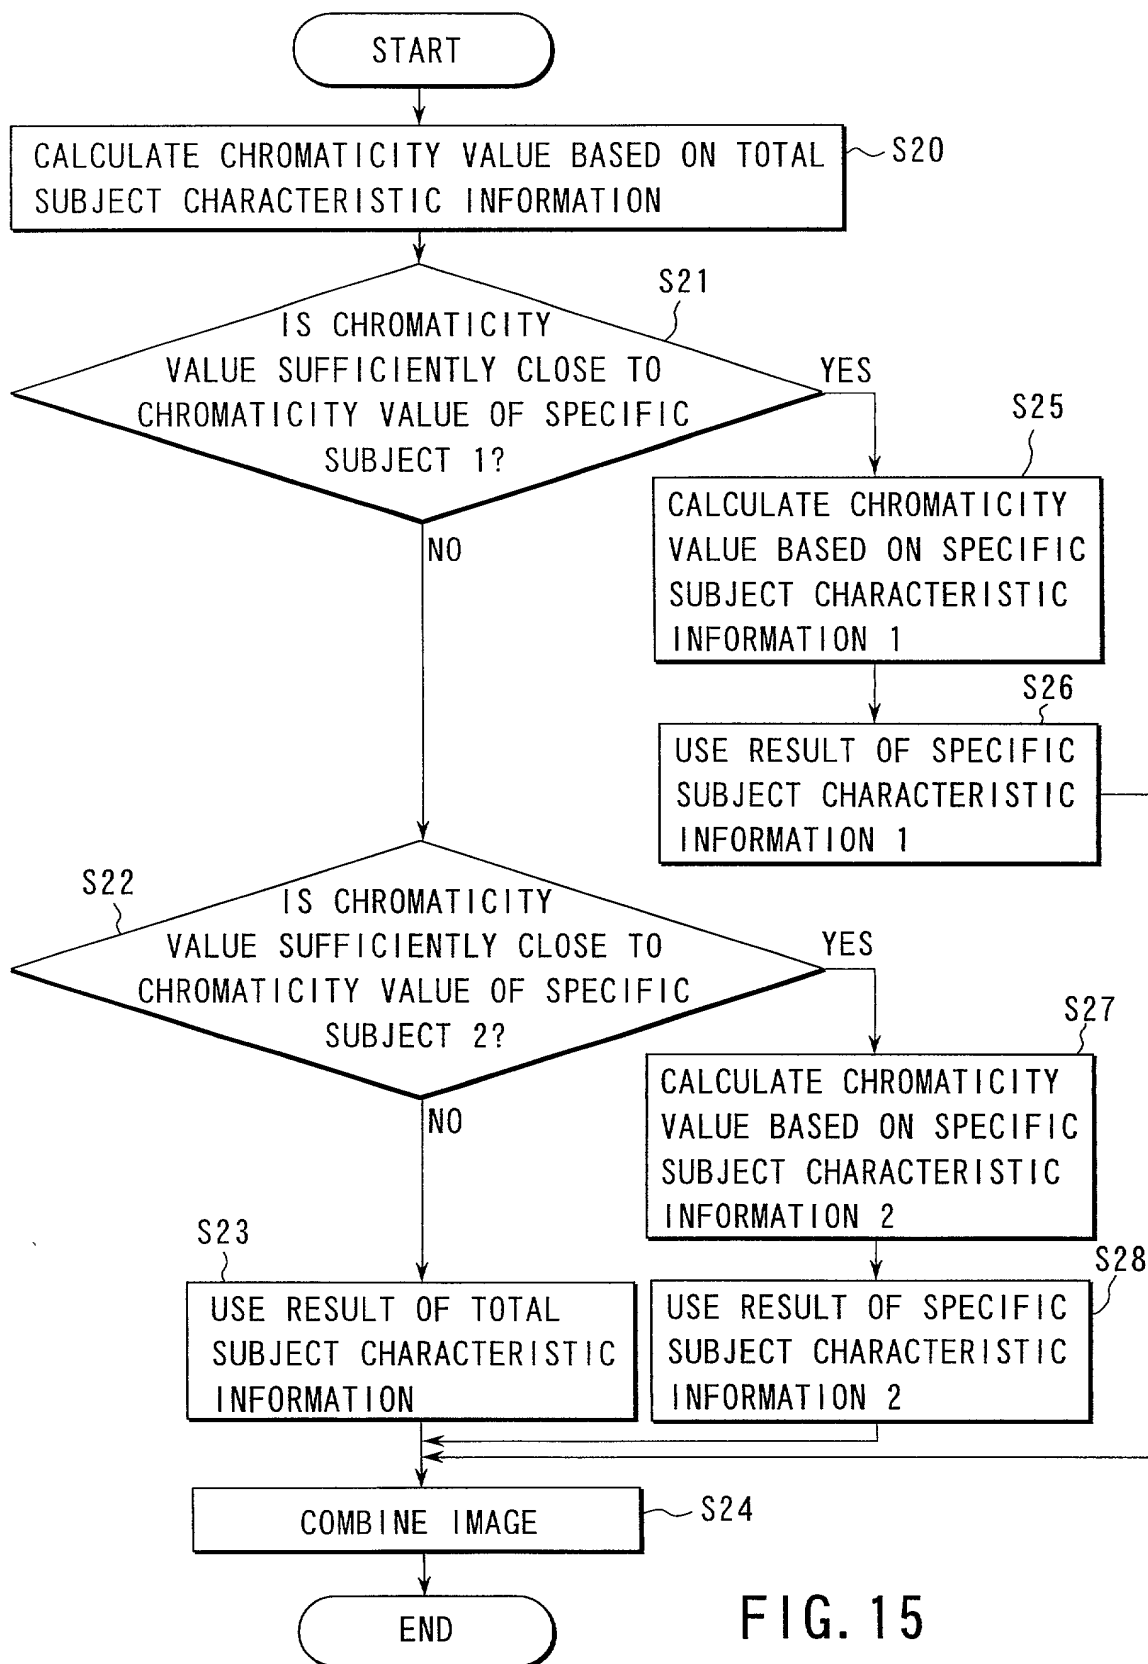
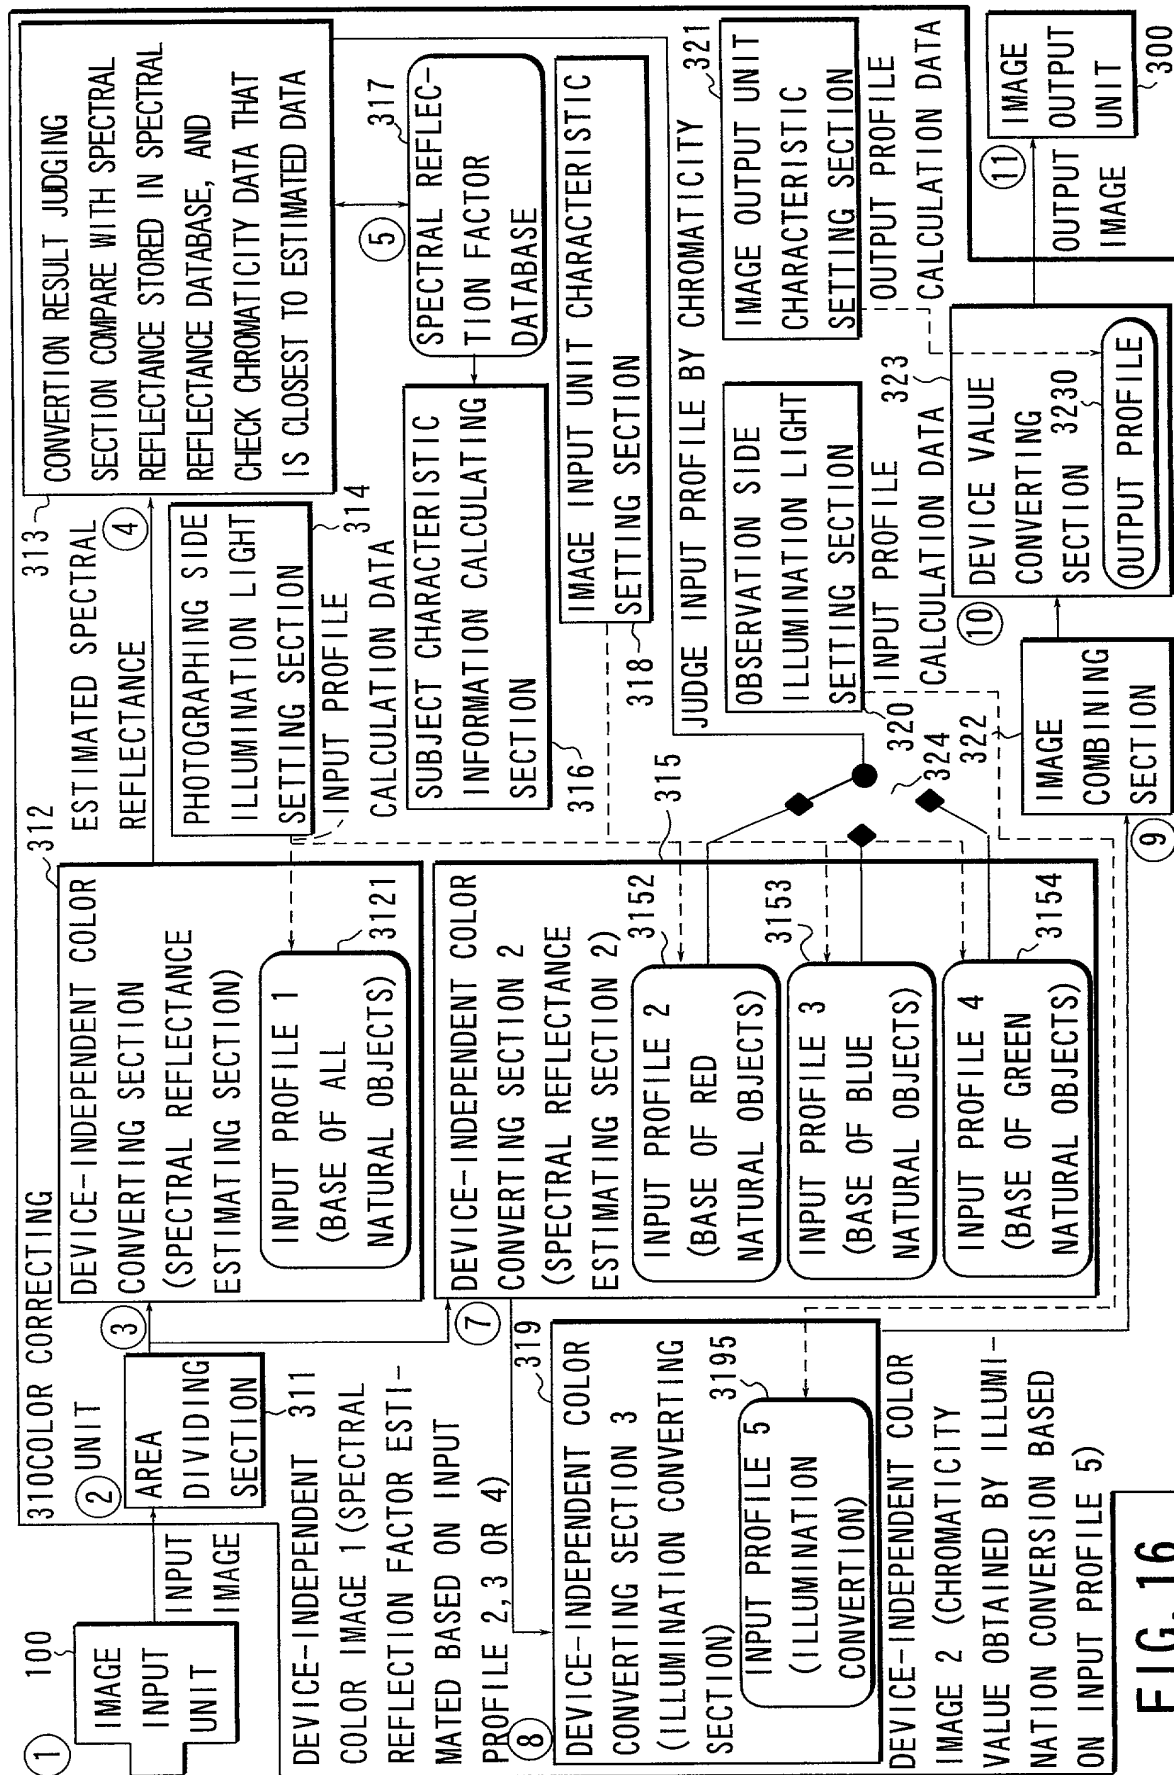


FIG. 15



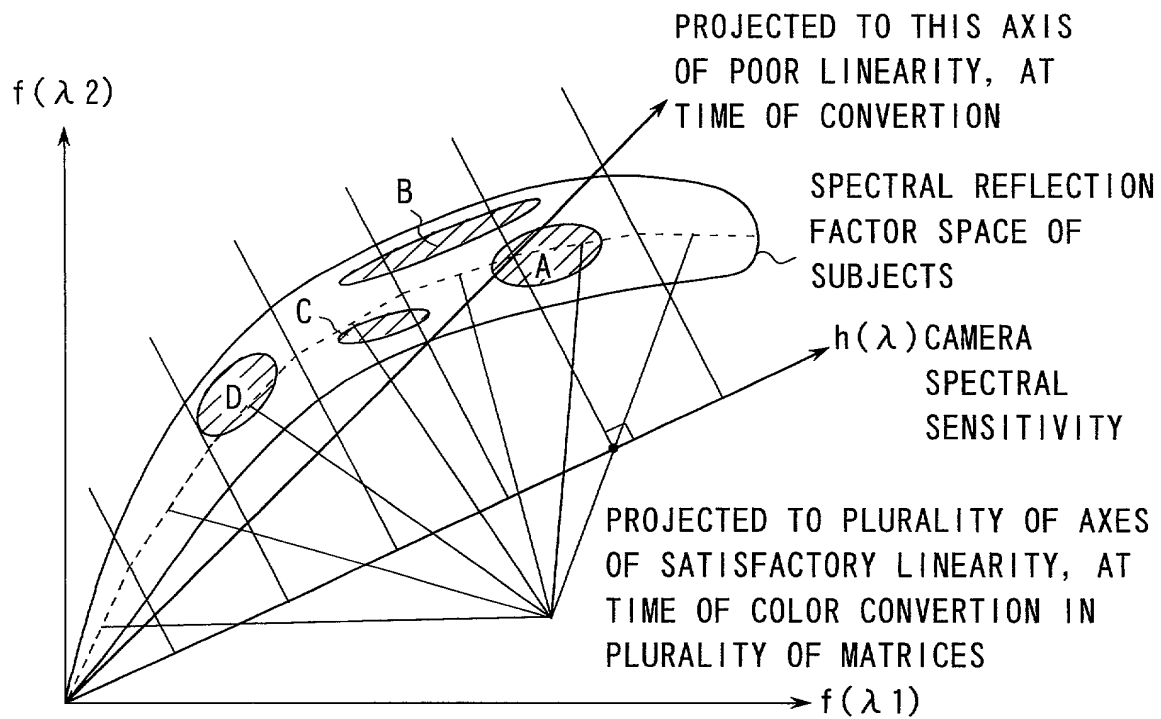


FIG. 19



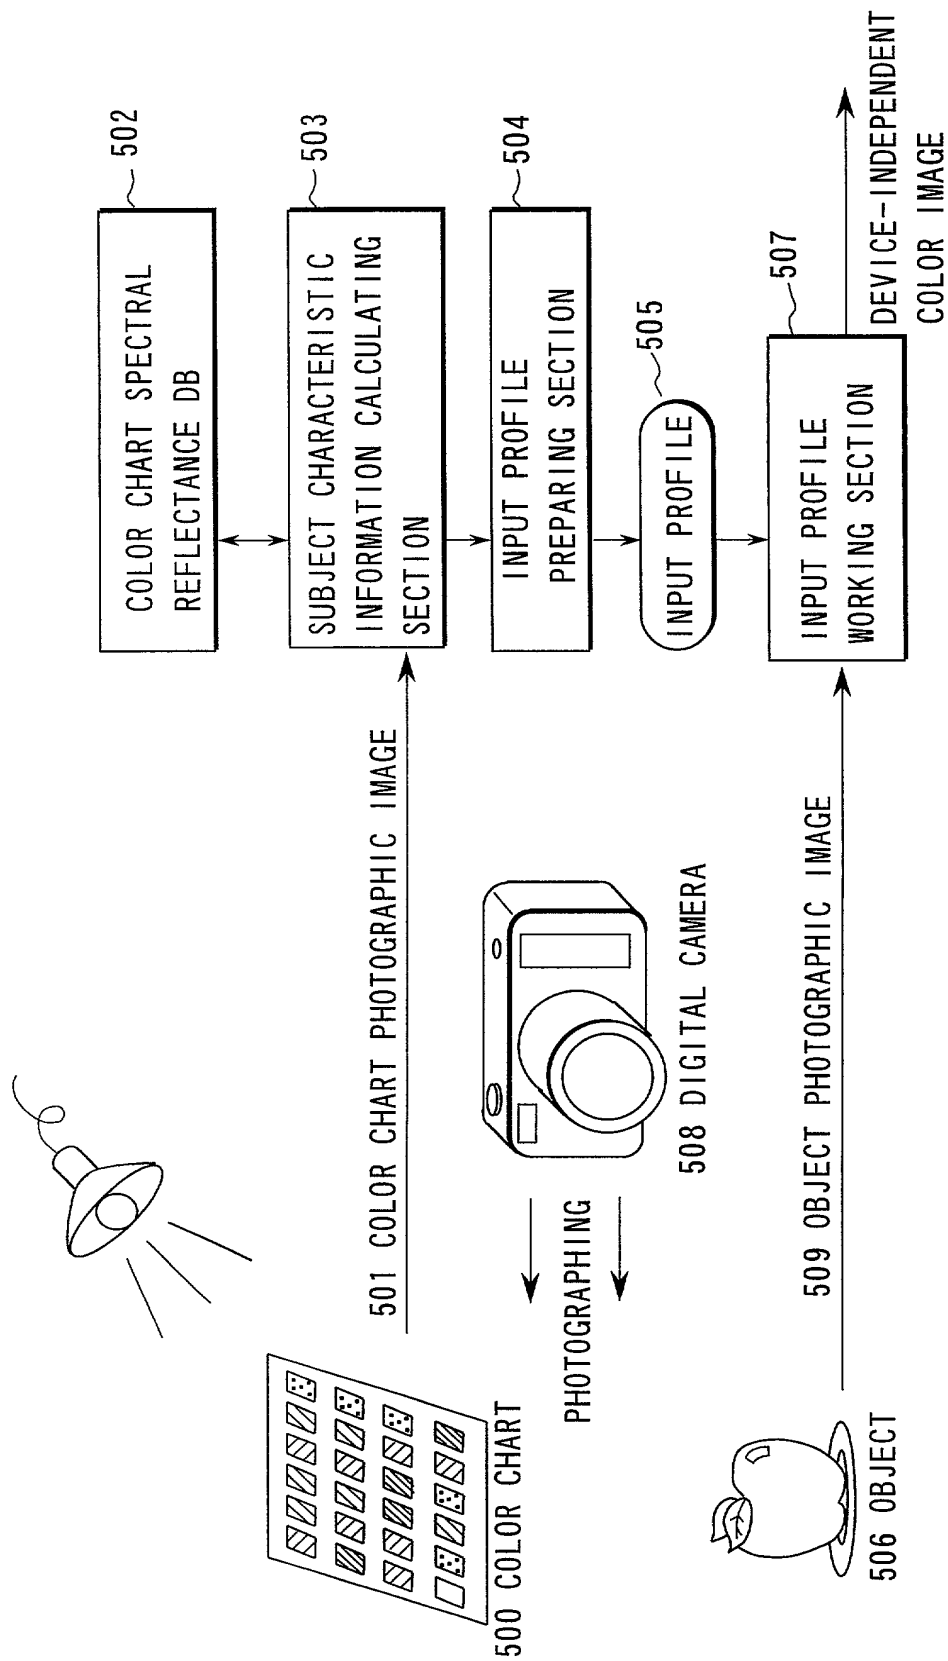


FIG. 20

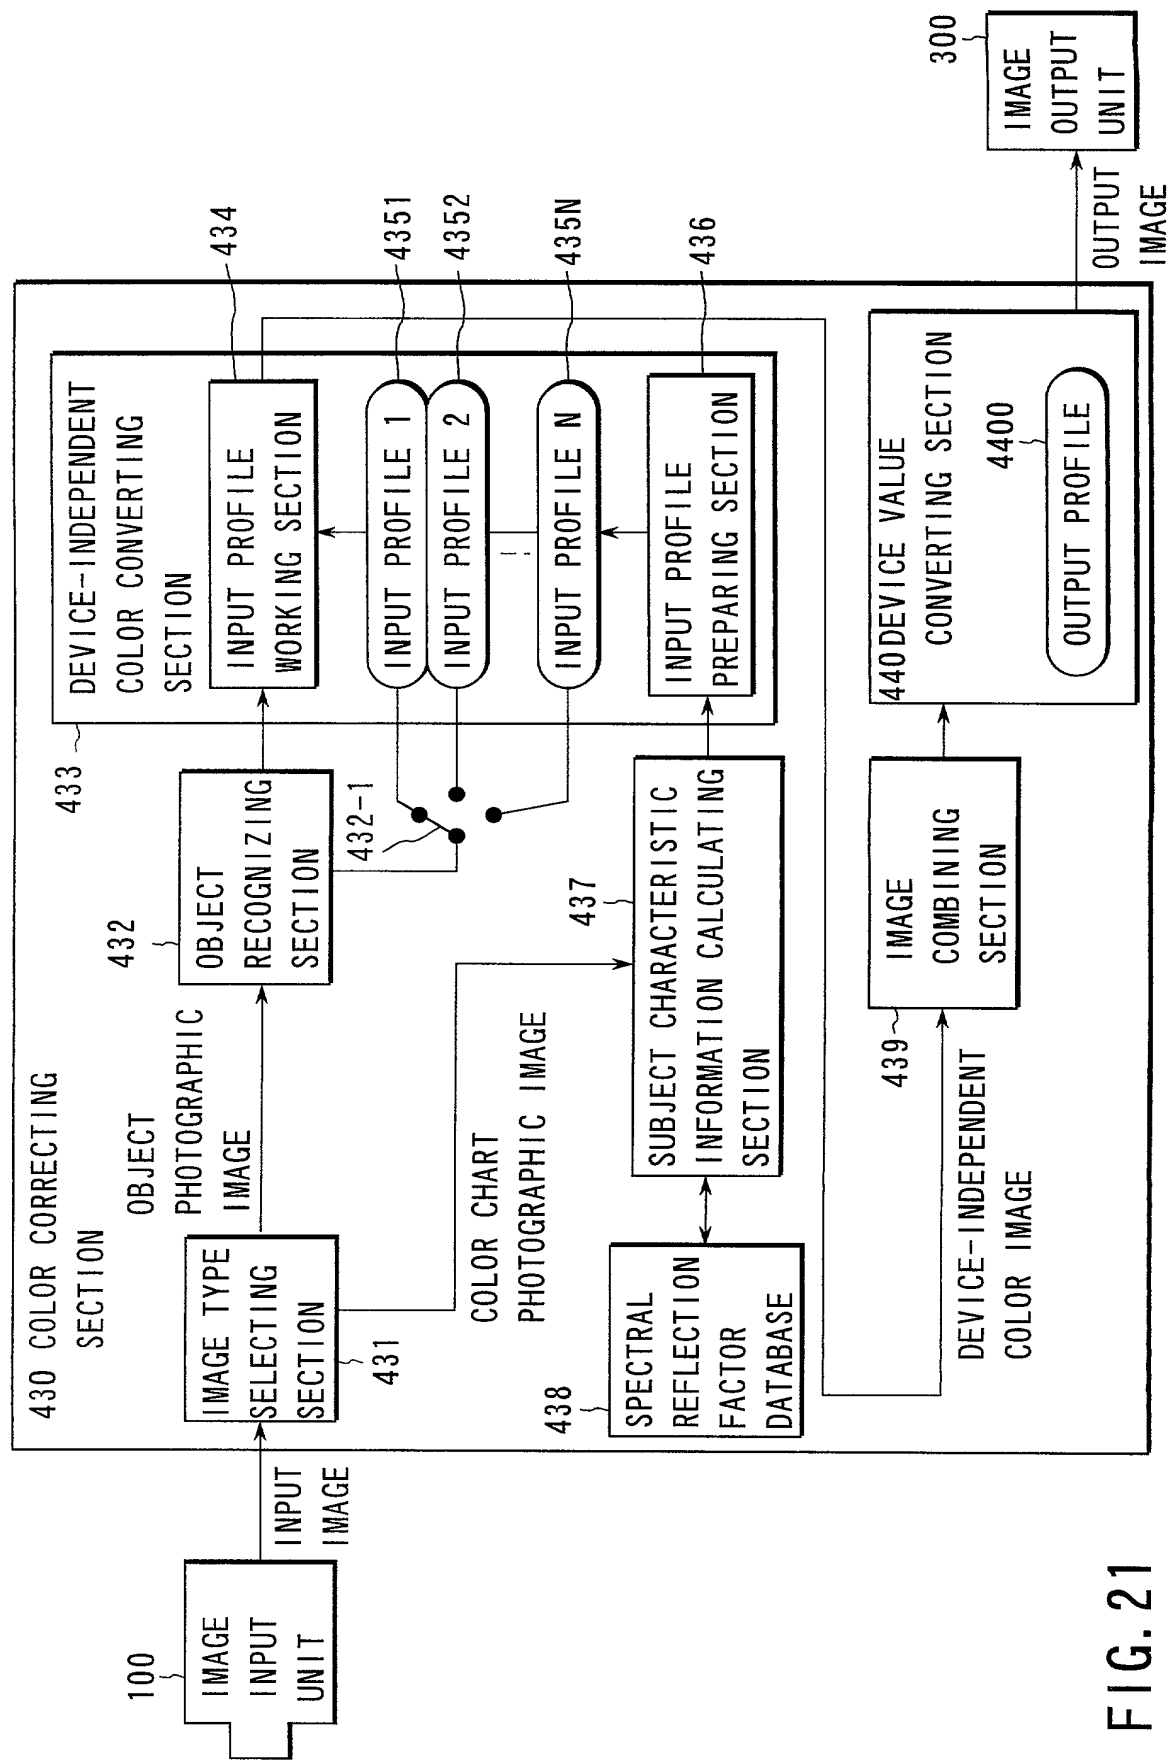

600 DIGITAL CAMERA



① PHOTOGRAPH BY
DIGITAL CAMERA

601 DISPLAY SCREEN

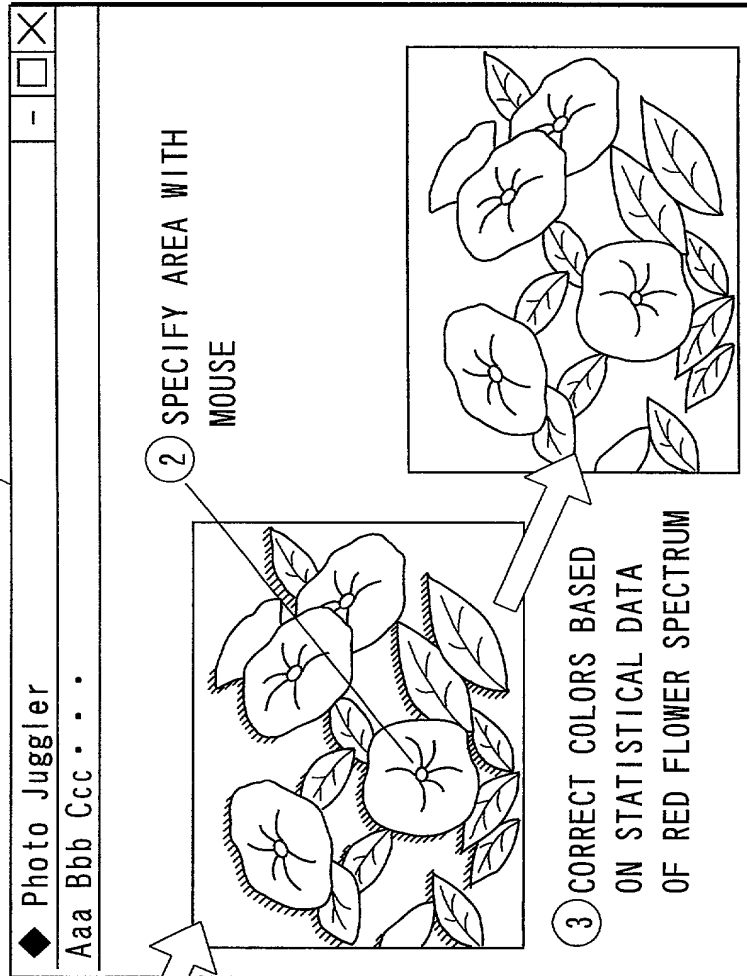


FIG. 22


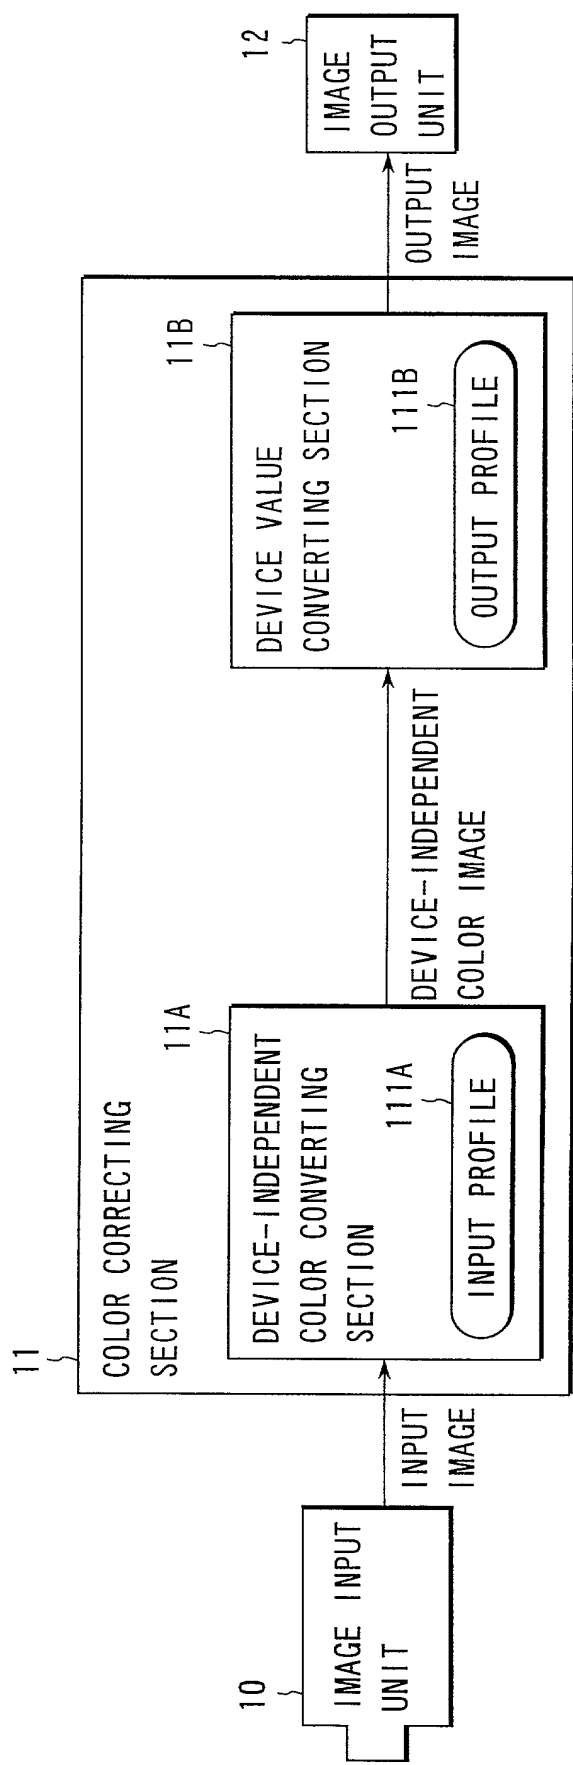


FIG. 23

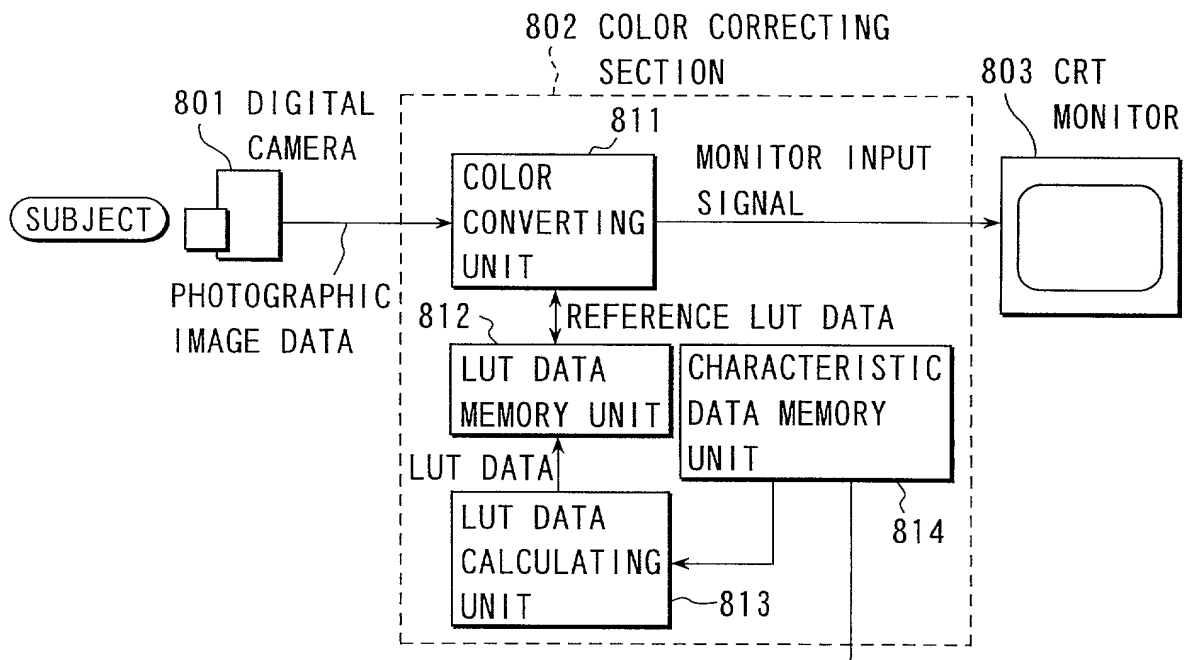

- DIGITAL CAMERA SPECTRAL SENSITIVITY
- PHOTOGRAPHIC ILLUMINATION LIGHT SPECTRUM
- OBSERVATION ILLUMINATION LIGHT SPECTRUM
- COLOR MATCHING FUNCTIONS
- SUBJECT SPECTRAL REFLECTANCE DATABASE
- MONITOR PROFILE

FIG. 24

SUBJECT SPECTRAL REFLECTANCE DATABASE

NUMBER WAVELENGTH	1	2	. . .	1000
380	0.25	0.52		0.35
381	0.35	0.68		0.58
382	0.38	0.66		0.67
383	0.44	0.53		0.65
.	.	.		.
.
.	.	.		.
779	0.29	0.85		0.18
780	0.22	0.88		0.15

FIG. 25

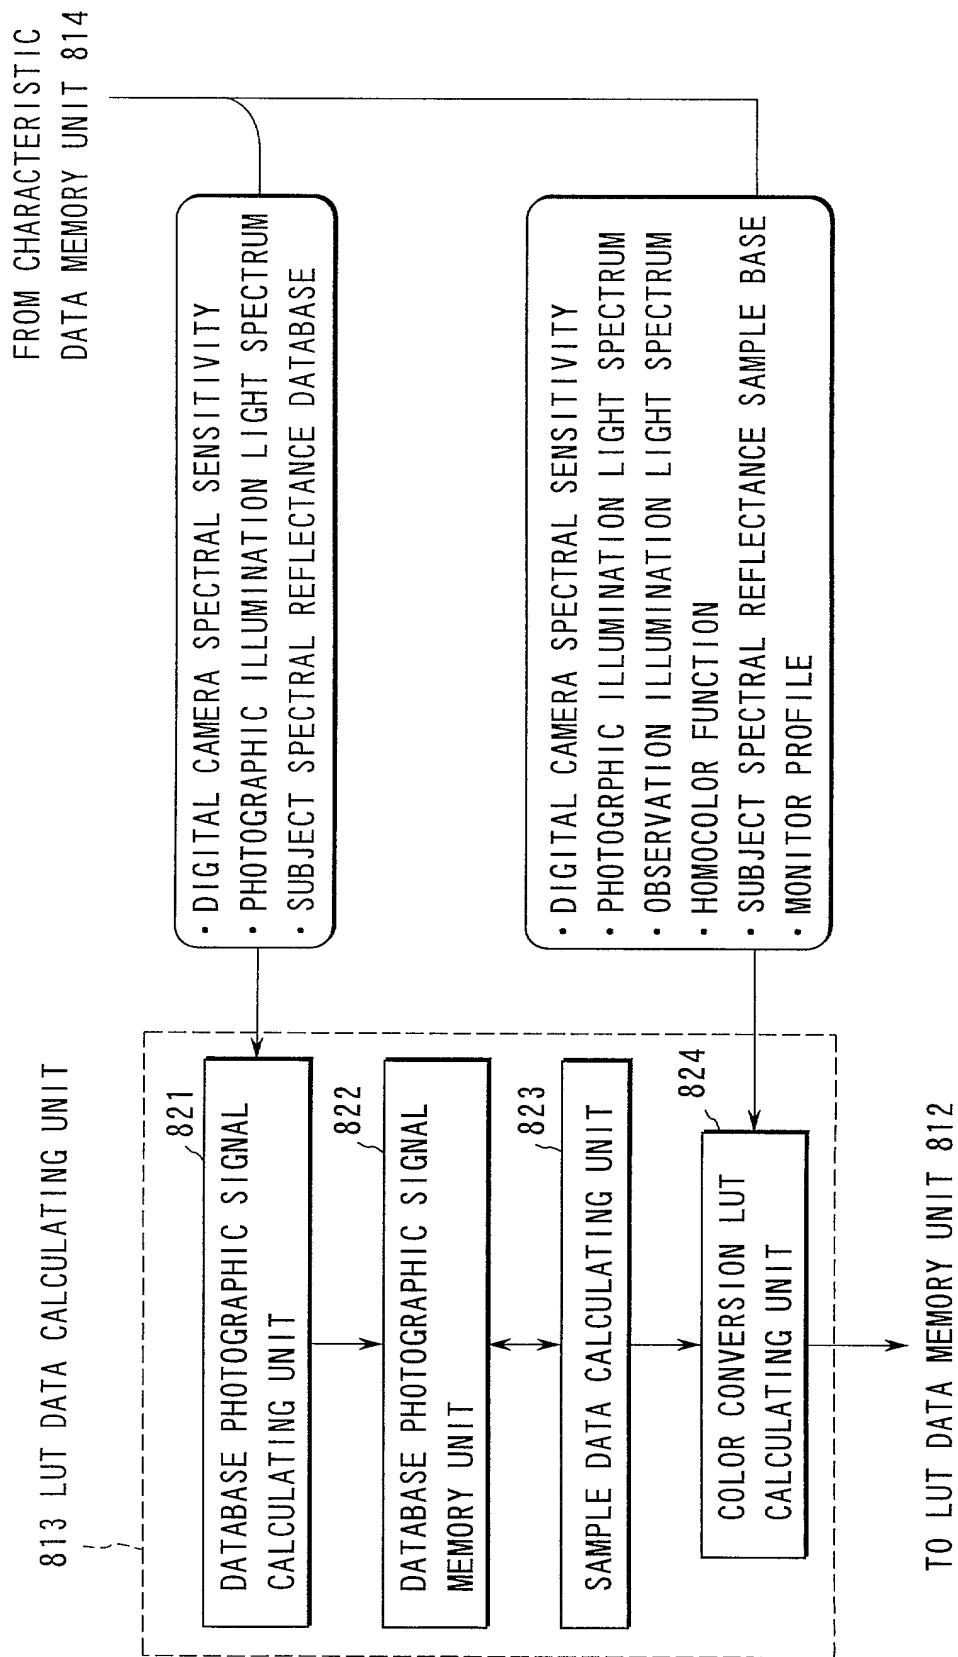


FIG. 26

DATABASE PHOTOGRAPHIC SIGNAL

NUMBER CHANNEL	1	2	...	1000
R	25	65		25
G	56	38	...	13
B	33	121		28

FIG. 27

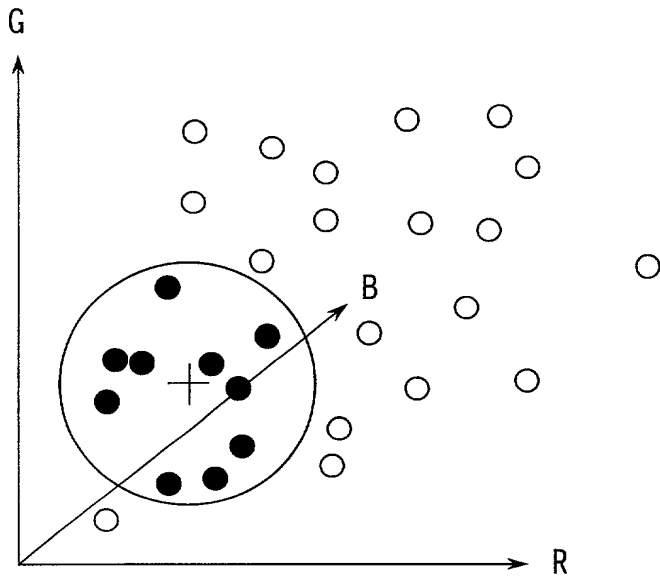


FIG. 28

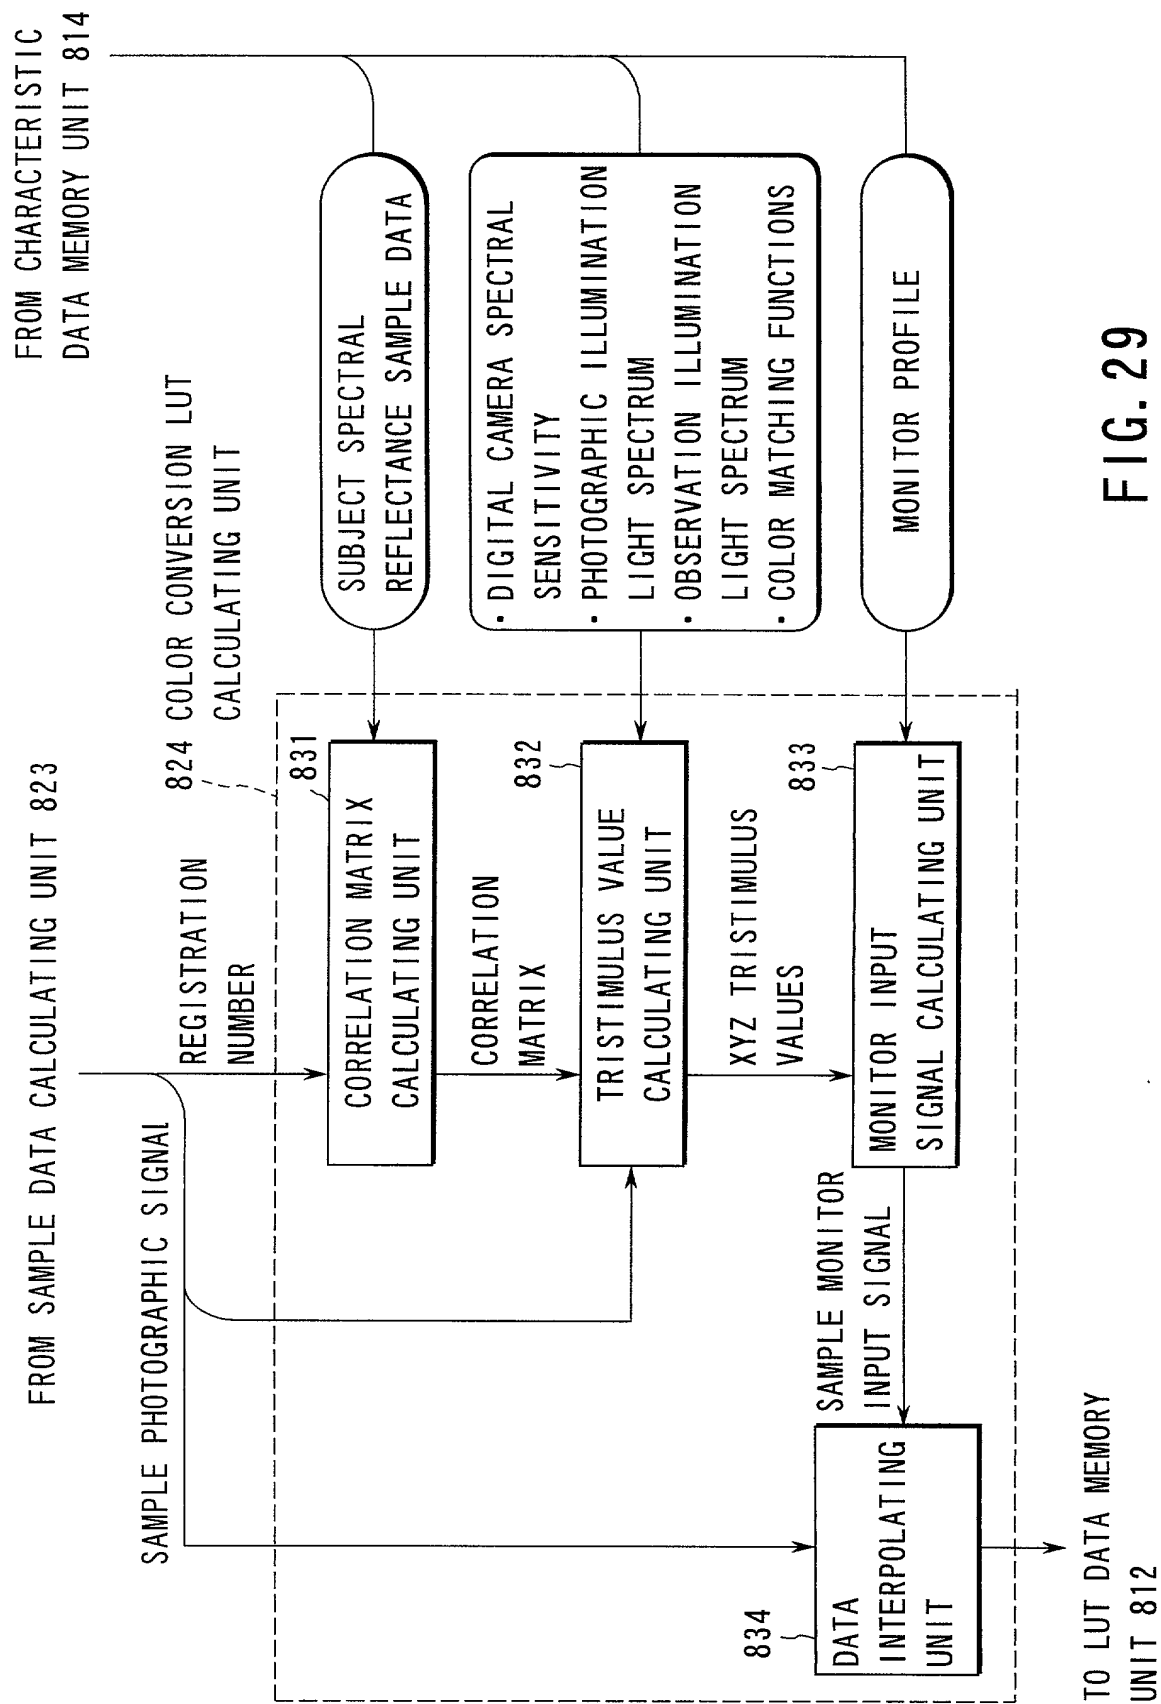


FIG. 29

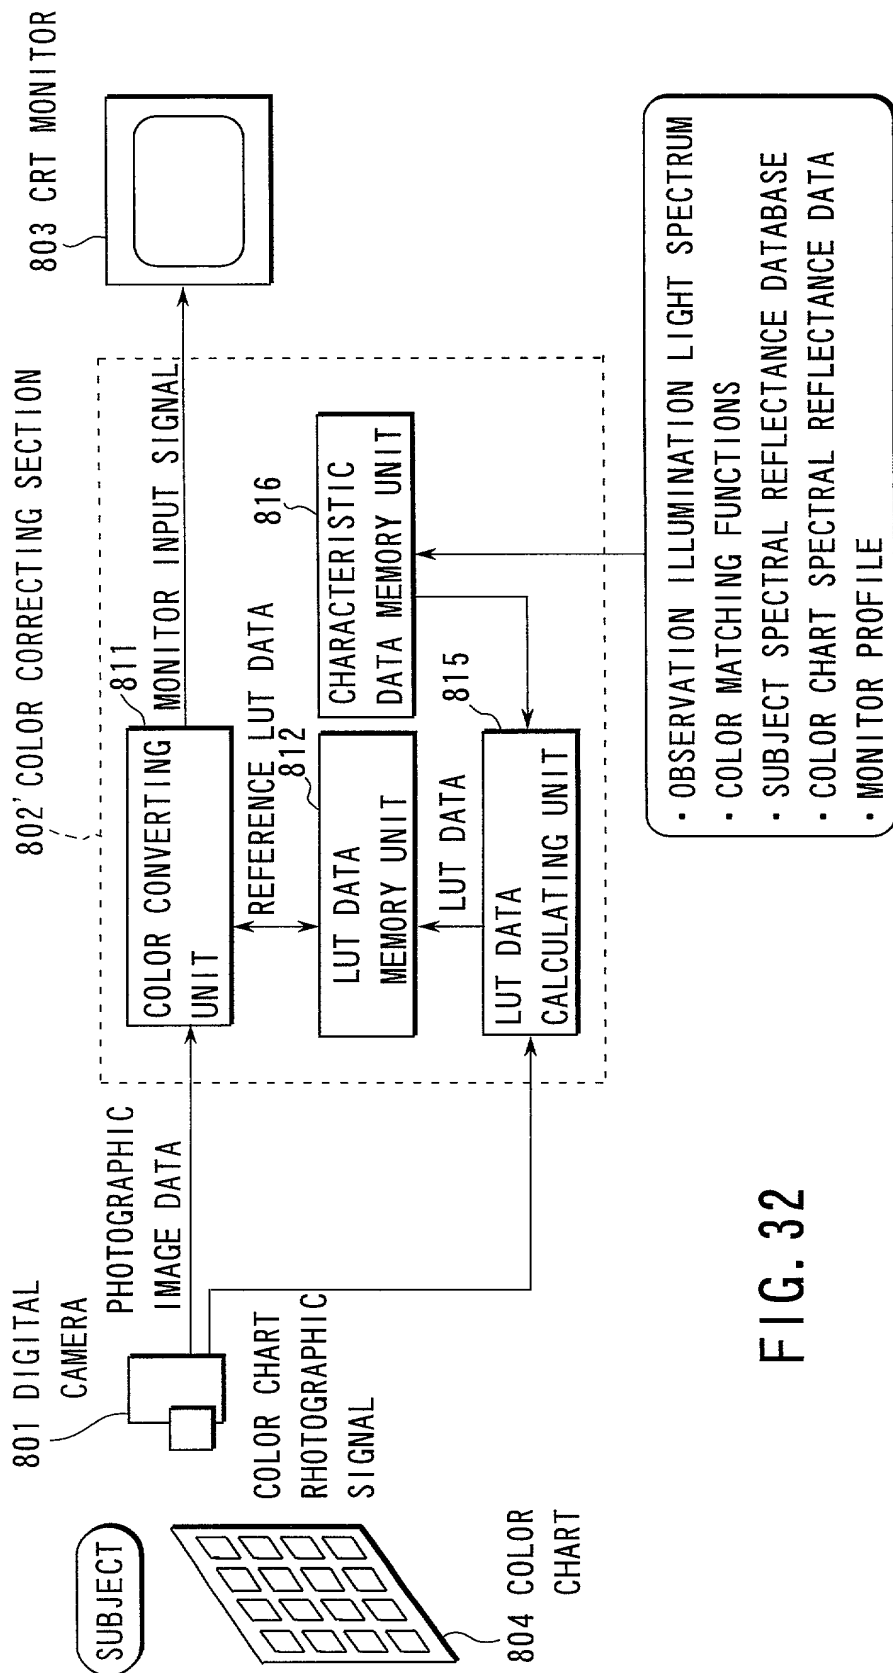


FIG. 32


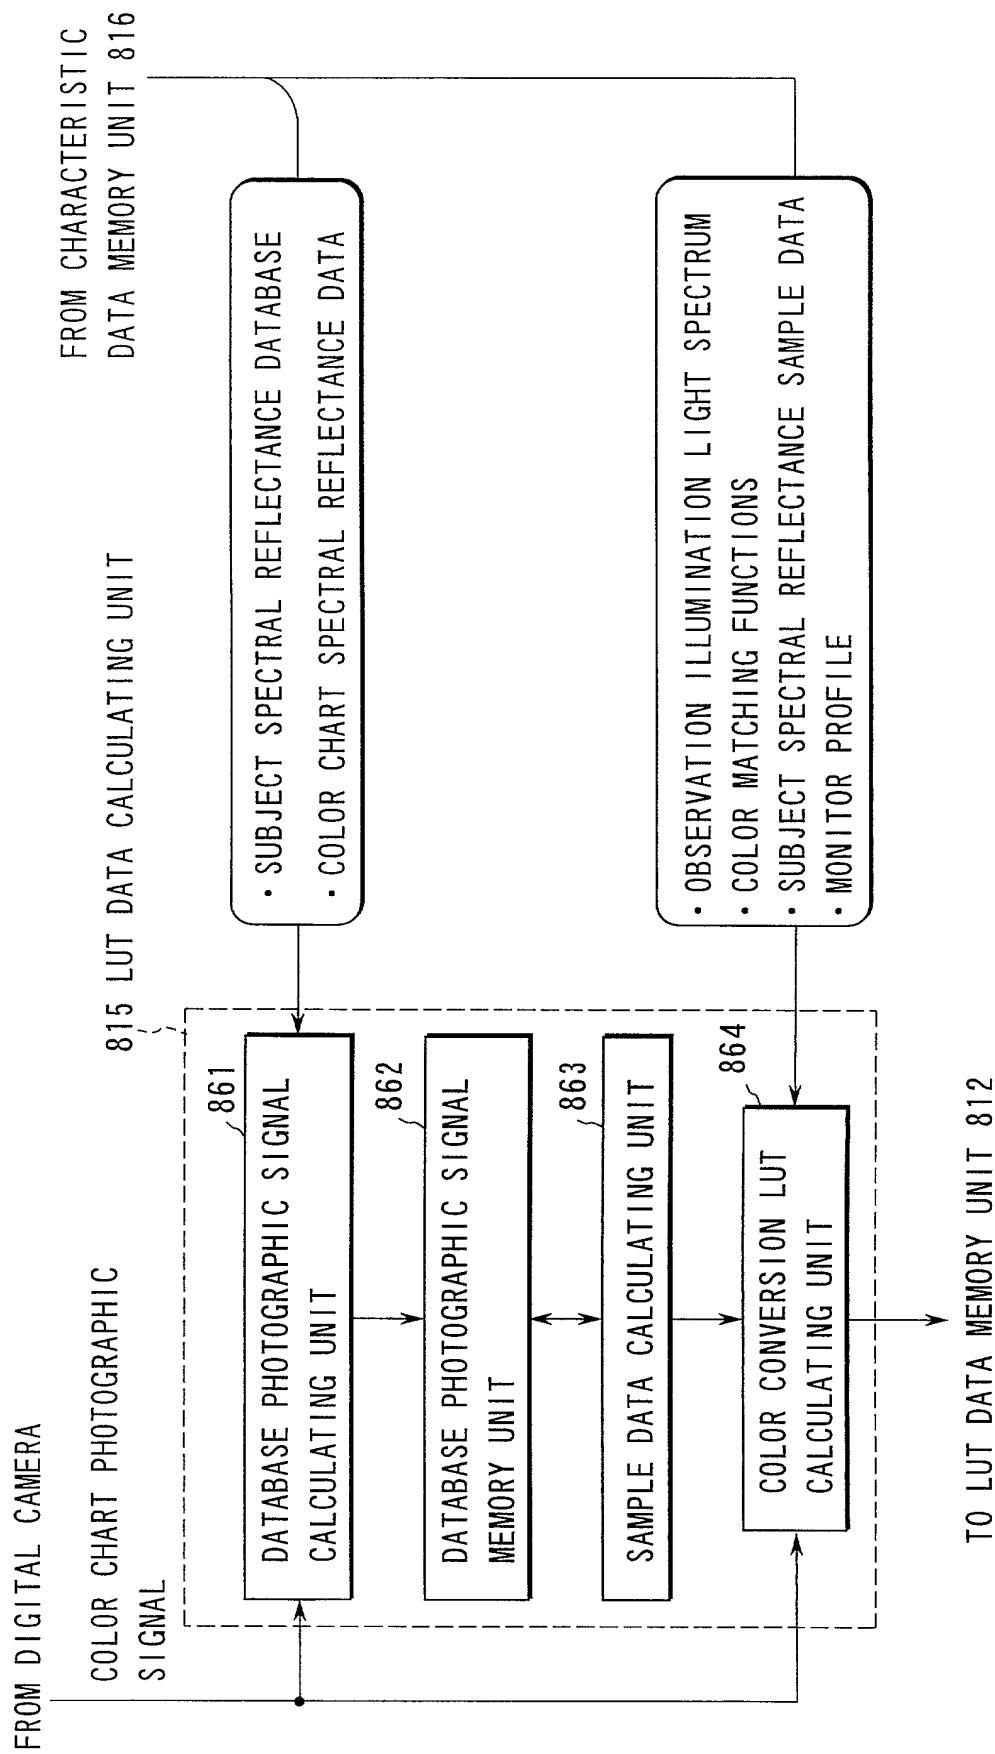


FIG. 33

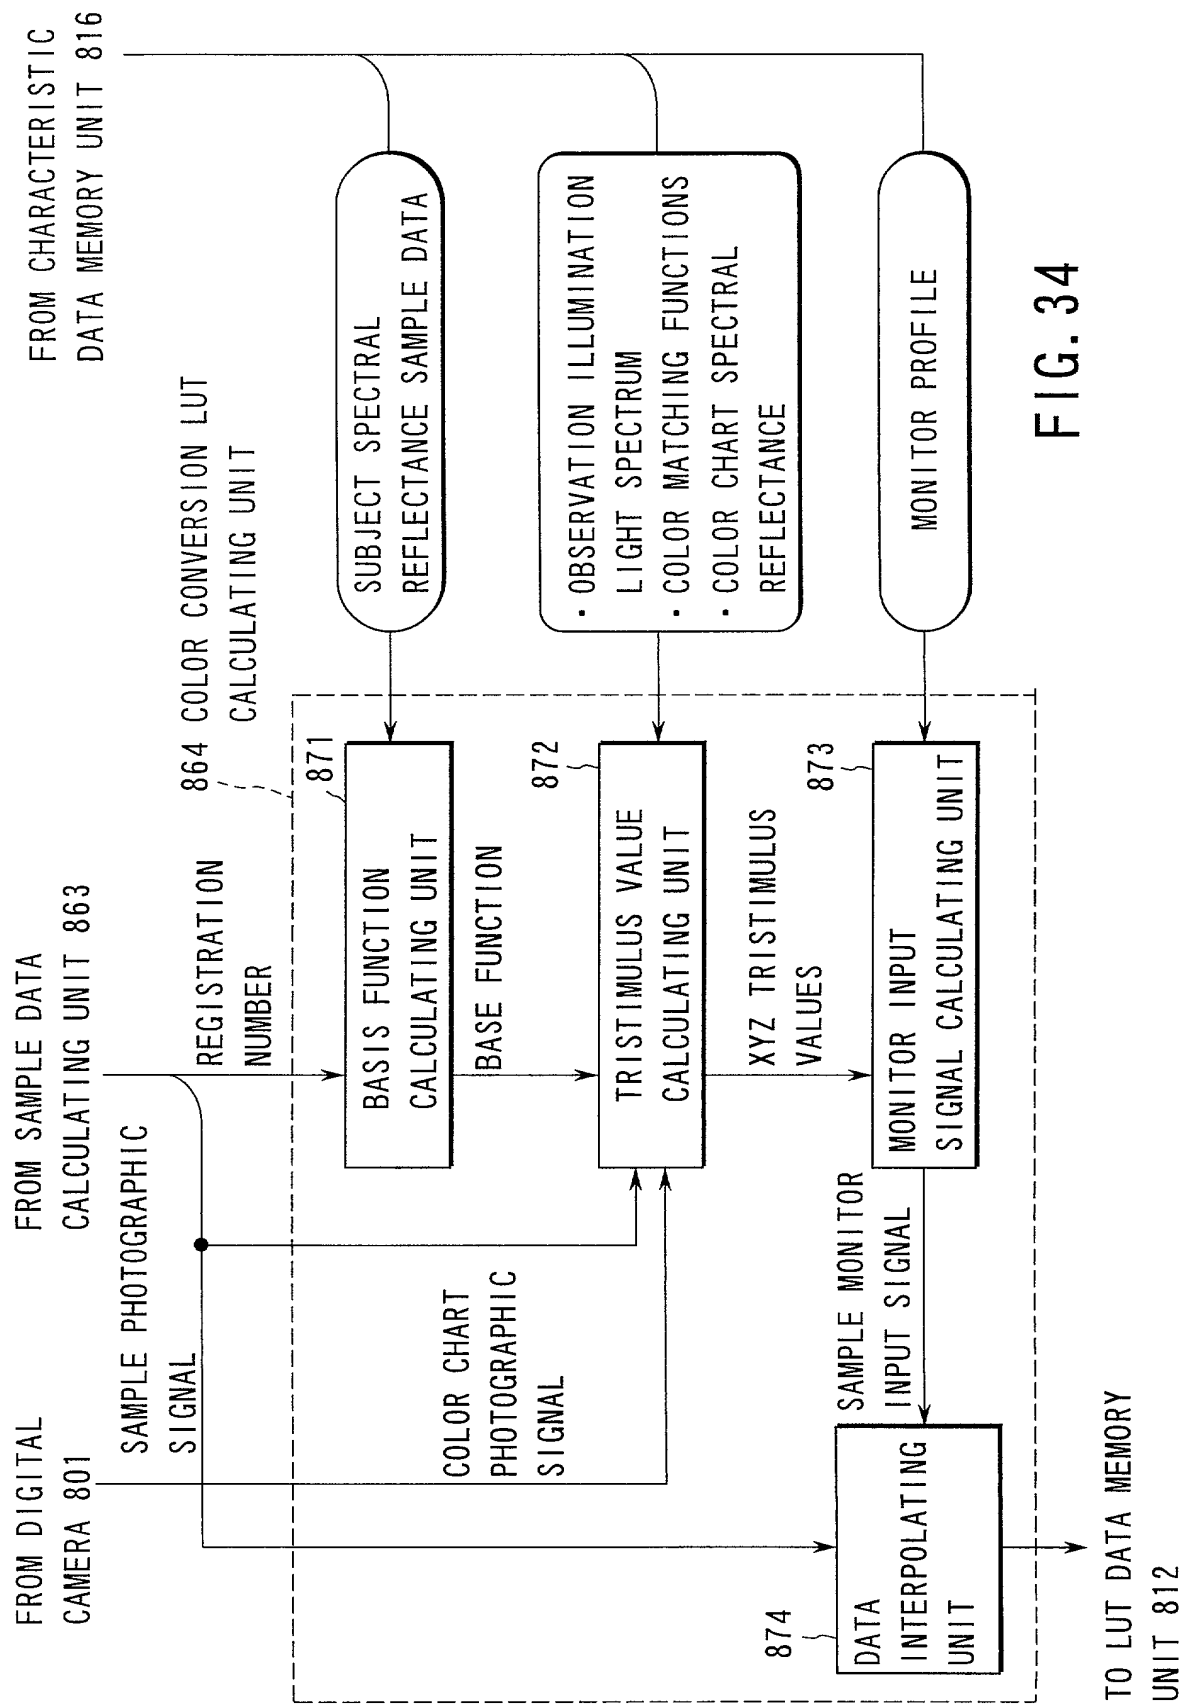

Declaration Power of Attorney For Patent Application

特許出願宣言書及び委任状 Japanese Language Declaration 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の横に記載された通りです。

My residence, post office address and citizenship are as stated below next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

被写体画像に応じて色補正パラメータを切り替えて色補正を行なう色再現システム

COLOR REPRODUCTION SYSTEM FOR CARRYING OUT COLOR CORRECTION BY CHANGING OVER COLOR-CORRECTION PARAMETERS ACCORDING TO IMAGES OF PHOTOGRAPHED SUBJECTS

上記発明の明細書（下記の欄で×印がついていない場合は、本書に添付）は、

The specification of which is attached hereto unless the following box is checked:

☐ _____月 _____日に

提出され米国出願番号または特許協定条約

☐ was filed on _____ as United States Application Number or PCT international Application Number

国際出願番号を _____ とし、

_____ and was amended on

（該当する場合） _____ 月 _____ 日に訂正されました。

_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56

Japanese Language Declaration

(日本語宣言書)

私は、合衆国法典第35編第119条(a)-(d)項又は第365条(b)に基づき下記の、米国以外の国の少なくとも一方国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

I hereby claim foreign priority under Title 35, United States Code, Section 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)
外国での先行出願

Priority Not Claimed
優先権の主張なし

(Number) (番号)	(Country) (国名)	(Day/Month/Year Filed) (出願年月日)	
11-151969	JAPAN	31/05/1999	<input type="checkbox"/>
11-172772	JAPAN	18/06/1999	<input type="checkbox"/>
			<input type="checkbox"/>
			<input type="checkbox"/>
			<input type="checkbox"/>

私は、第35編米国法典119条(e)項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below

(Application No.) (出願番号)	(Filing Date) (出願日)	(Application No.) (出願番号)	(Filing Date) (出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) or 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT Information application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which become available between the filing date of the prior application and the national or PCT international filing date of application:

(Application No.) (出願番号)	(Filing Date) (出願日)	(Status: Patented, Pending, Abandoned) (現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行う表明が真実であり、かつ私の入手した情報と私の信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Japanese Language Declaration

(日本語宣言書)

委任状：私は、下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。
(弁理士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

John C. Pokotylo (Reg. No. 36,242) and Michael P. Straub (Reg. No. 36,941)


書類送付先：

Send Correspondence to
STRAUB & POKOTYLO

1 Bethany Road
Suite 56, Bldg. 4
Hazlet, NJ 07730

直通電話連絡先：

Direct Telephone Calls to: (name and telephone number)
Telephone No. (732) 335-1222
Facsimile No. (732) 335-1228

唯一のまたは第一発明者の氏名	Full name of sole or first inventor
石井 謙介	Kensuke Ishii
同発明者の署名 日付	Inventor's signature Date
	 May 25, 2000
住 所	Residence
日本国東京都	Tokyo, Japan
国 籍	Citizenship
日本	JAPAN
郵便の宛先	Post Office Address
日本国東京都八王子市久保山町2-3	c/o Intellectual Property Department, OLYMPUS OPTICAL CO., LTD.
オリンパス光学工業株式会社 知的財産部内	2-3, Kuboyama-cho, Hachioji-shi, Tokyo, Japan

(第二以降の共同発明者に対しても同様に記載し、署名をすること。)

(Supply similar information and signature for second and subsequent joint inventors.)

Japanese Language Declaration

(日本語宣言書)

第 2 共同発明者の氏名 (該当する場合)	Full name of 2nd joint inventor, if any
大澤 健郎	Kenro Ohsawa
同第 2 発明者の署名 日付	2nd Inventor's signature Date
	<i>Kenro Ohsawa</i> May 26, 2000
住 所	Residence
日本国武蔵野市	Musashino-shi, Japan
国 籍	Citizenship
日本	JAPAN
郵便の宛先 日本国東京都八王子市久保山町 2-3	Post Office Address c/o Intellectual Property Department, OLYMPUS OPTICAL CO., LTD.
オリンパス光学工業株式会社 知的財産部内	2-3, Kuboyama-cho, Hachioji-shi, Tokyo, Japan
第 共同発明者の氏名 (該当する場合)	Full name of joint inventor, if any
同第 発明者の署名 日付	Inventor's signature Date
住 所	Residence
国 籍	Citizenship
郵便の宛先	Post Office Address
第 共同発明者の氏名 (該当する場合)	Full name of joint inventor, if any
同第 発明者の署名 日付	Inventor's signature Date
住 所	Residence
国 籍	Citizenship
郵便の宛先	Post Office Address

01
02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99